

UNCOMPENSATED OPERATIONAL AMPLIFIER

... designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

- Low Input Offset Voltage — 3.0 mV max
- Low Input Offset Current — 60 nA max
- Large Power-Bandwidth — 20 Vp-p Output Swing at 20 kHz min
- Output Short-Circuit Protection
- Input Over-Voltage Protection
- Class AB Output for Excellent Linearity
- High Slew Rate — 34 V/ μ s typ

FIGURE 1 — HIGH SLEW-RATE INVERTER

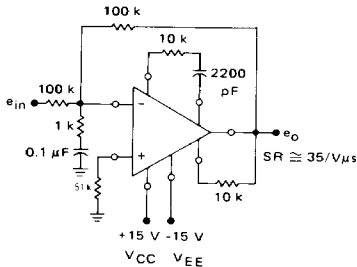


FIGURE 2 — OUTPUT NULLING CIRCUIT


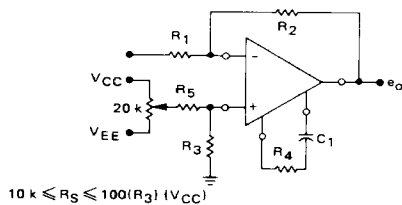


FIGURE 3 — OUTPUT LIMITING CIRCUIT


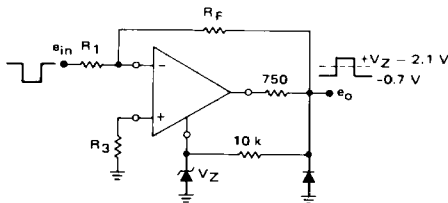


**MC1439
 MC1539**


OPERATIONAL AMPLIFIER

**SILICON MONOLITHIC
 INTEGRATED CIRCUIT**


**G SUFFIX
 METAL PACKAGE
 CASE 601**



(Top View)



**P1 SUFFIX
 PLASTIC PACKAGE
 CASE 626
 (MC1439 Only)**

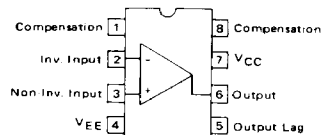

(Top View)

ORDERING INFORMATION

| Device | Temperature Range | Package |
|----------|-------------------|-------------|
| MC1439G | 0°C to +70°C | Metal Can |
| MC1439P1 | 0°C to +70°C | Plastic DIP |
| MC1539G | -55°C to +125°C | Metal Can |

MC1439, MC1539

ELECTRICAL CHARACTERISTICS ($V_{CC} = +15$ Vdc, $V_{EE} = -15$ Vdc, $T_A = +25^\circ\text{C}$ unless otherwise noted.)

| Characteristic | Symbol | MC1539 | | | MC1439 | | | Unit |
|---|----------------------|----------|----------|------|----------|---------|-----|-------------------------------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Input Bias Current ($T_A = +25^\circ\text{C}$) ($T_A = T_{low}$) | I_{IB} | — | 0.20 | 0.50 | — | 0.20 | 1.0 | μA |
| | | — | 0.23 | 0.70 | — | 0.23 | 1.5 | |
| Input Offset Current ($T_A = T_{low}$) ($T_A = +25^\circ\text{C}$) ($T_A = T_{high}$) | $ I_{IO} $ | — | — | 75 | — | — | 150 | nA |
| | | — | 20 | 60 | — | 20 | 100 | |
| | | — | — | 75 | — | — | 150 | |
| Input Offset Voltage ($T_A = +25^\circ\text{C}$) ($T_A = T_{low}, T_{high}$) | $ V_{IO} $ | — | 1.0 | 3.0 | — | 2.0 | 7.5 | mV |
| | | — | — | 4.0 | — | — | — | |
| Average Temperature Coefficient of Input Offset Voltage ($T_A = T_{low}$ to T_{high}) ($R_S = 50 \Omega$) ($R_S \leq 10 \text{ k}\Omega$) | $ TCV_{IO} $ | — | 3.0 | — | — | 3.0 | — | $\mu\text{V}/^\circ\text{C}$ |
| | | — | 5.0 | — | — | 5.0 | — | |
| Input Impedance ($f = 20 \text{ Hz}$) | z_{in} | 150 | 300 | — | 100 | 300 | — | $\text{k}\Omega$ |
| Input Common-Mode Voltage Range | V_{ICR} | +11 | +12 | — | ± 11 | +12 | — | V_{pk} |
| Equivalent Input Noise Voltage ($R_S = 10 \text{ k}\Omega$, Noise Bandwidth = 1.0 Hz, $f = 1.0 \text{ kHz}$) | e_n | — | 30 | — | — | 30 | — | $\text{nV}/(\text{Hz})^{1/2}$ |
| Common-Mode Rejection Ratio ($f = 1.0 \text{ kHz}$) | CMRR | 80 | 110 | — | 80 | 110 | — | dB |
| Open-Loop Voltage Gain ($V_O = \pm 10 \text{ V}$, $R_L = 10 \text{ k}\Omega$, $R_S = \infty$) ($T_A = +25^\circ\text{C}$ to T_{high}) ($T_A = T_{low}$) | A_{VOL} | 50,000 | 120,000 | — | 15,000 | 100,000 | — | — |
| | | 25,000 | 100,000 | — | 15,000 | 100,000 | — | |
| Power Bandwidth ($A_v = 1$, THD $\leq 5\%$, $V_O = 20 \text{ V}_{p-p}$) ($R_L = 2.0 \text{ k}\Omega$) ($R_L = 1.0 \text{ k}\Omega$, $R_S = 10 \text{ k}\Omega$) | PBW | — | — | — | 10 | 50 | — | kHz |
| | | 20 | 50 | — | — | — | — | |
| Step Response { Gain = 1000, no overshoot, $R_1 = 1.0 \text{ k}\Omega$, $R_2 = 1.0 \text{ M}\Omega$, $R_3 = 1.0 \text{ k}\Omega$, $R_4 = 30 \text{ k}\Omega$, $R_5 = 10 \text{ k}\Omega$, $C_1 = 1000 \text{ pF}$ } | t_{THL} | — | 130 | — | — | 130 | — | ns |
| | t_{pd} | — | 190 | — | — | 190 | — | ns |
| | SR | — | 6.0 | — | — | 6.0 | — | $\text{V}/\mu\text{s}$ |
| { Gain = 1000, 15% overshoot, $R_1 = 1.0 \text{ k}\Omega$, $R_2 = 1.0 \text{ M}\Omega$, $R_3 = 1.0 \text{ k}\Omega$, $R_4 = 0$, $R_5 = 10 \text{ k}\Omega$, $C_1 = 10 \text{ pF}$ } | t_{THL} | — | 80 | — | — | 80 | — | ns |
| | t_{pd} | — | 100 | — | — | 100 | — | ns |
| | SR | — | 14 | — | — | 14 | — | $\text{V}/\mu\text{s}$ |
| { Gain = 100, no overshoot, $R_1 = 1.0 \text{ k}\Omega$, $R_2 = 100 \text{ k}\Omega$, $R_3 = 1.0 \text{ k}\Omega$, $R_4 = 10 \text{ k}\Omega$, $R_5 = 10 \text{ k}\Omega$, $C_1 = 2200 \text{ pF}$ } | t_{THL} | — | 60 | — | — | 60 | — | ns |
| | t_{pd} | — | 100 | — | — | 100 | — | ns |
| | SR | — | 34 | — | — | 34 | — | $\text{V}/\mu\text{s}$ |
| { Gain = 10, 15% overshoot, $R_1 = 1.0 \text{ k}\Omega$, $R_2 = 10 \text{ k}\Omega$, $R_3 = 1.0 \text{ k}\Omega$, $R_4 = 1.0 \text{ k}\Omega$, $R_5 = 10 \text{ k}\Omega$, $C_1 = 2200 \text{ pF}$ } | t_{THL} | — | 120 | — | — | 120 | — | ns |
| | t_{pd} | — | 80 | — | — | 80 | — | ns |
| | SR | — | 6.25 | — | — | 6.25 | — | $\text{V}/\mu\text{s}$ |
| { Gain = 1, 15% overshoot, $R_1 = 10 \text{ k}\Omega$, $R_2 = 10 \text{ k}\Omega$, $R_3 = 5.0 \text{ k}\Omega$, $R_4 = 390 \Omega$, $R_5 = 10 \text{ k}\Omega$, $C_1 = 2200 \text{ pF}$ } | t_{THL} | — | 160 | — | — | 160 | — | ns |
| | t_{pd} | — | 80 | — | — | 80 | — | ns |
| | SR | — | 4.2 | — | — | 4.2 | — | $\text{V}/\mu\text{s}$ |
| Output Impedance ($f = 20 \text{ Hz}$) | z_o | — | 4.0 | — | — | 4.0 | — | $\text{k}\Omega$ |
| Output Voltage Swing ($R_L = 2.0 \text{ k}\Omega$, $f = 1.0 \text{ kHz}$) ($R_L = 1.0 \text{ k}\Omega$, $f = 1.0 \text{ kHz}$) | V_O | — | — | — | +10 | +13 | — | V_{pk} |
| | | ± 10 | ± 13 | — | — | — | — | |
| Positive Supply Rejection Ratio (V_{EE} constant, $R_S = \infty$) | PSRR+ | — | 50 | 150 | — | 50 | 200 | $\mu\text{V}/\text{V}$ |
| Negative Supply Rejection Ratio (V_{CC} constant, $R_S = \infty$) | PSRR- | — | 50 | 150 | — | 50 | 200 | $\mu\text{V}/\text{V}$ |
| Power Supply Current ($V_O = 0$) | I_{CC} I_{EE} | — | 3.0 | 5.0 | — | 3.0 | 6.7 | mAdc |
| | | — | 3.0 | 5.0 | — | 3.0 | 6.7 | |

① $T_{low} = 0^\circ\text{C}$ for MC1439 $T_{high} = +70^\circ\text{C}$ for MC1439
 -55°C for MC1539 $+125^\circ\text{C}$ for MC1539

MC1439, MC1539

MAXIMUM RATINGS (TA = +25°C, unless otherwise noted.)

| Rating | Symbol | Value | Unit |
|--|------------------------------------|---|-------|
| Power Supply Voltage | V _{CC} V _{EE} | +18 +18 | Vdc |
| Differential Input Voltage Range | V _{IDR} | ±(V _{CC} + V _{EE}) | Vdc |
| Common-Mode Input Voltage Range | V _{ICR} | +V _{CC} , - V _{EE} | Vdc |
| Load Current | I _L | 15 | mA |
| Output Short-Circuit Duration | t _s | Continuous | |
| Power Dissipation (Package Limitation) | P _D | | |
| Metal Package | | 680 | mW |
| Derate above T _A = +25°C | | 4.6 | mW/°C |
| Plastic Dual In-Line Packages MC1439 | | 625 | mW |
| Derate above T _A = +25°C | | 5.0 | mW/°C |
| Operating Temperature Range | MC1539 MC1439 | T _A | °C |
| | | -55 to +125 0 to +70 | |
| Storage Temperature Range | | T _{stg} | °C |
| Metal Packages | | -65 to +150 | |
| Plastic Packages | | -55 to +125 | |

2

FIGURE 4 – EQUIVALENT CIRCUIT SCHEMATIC


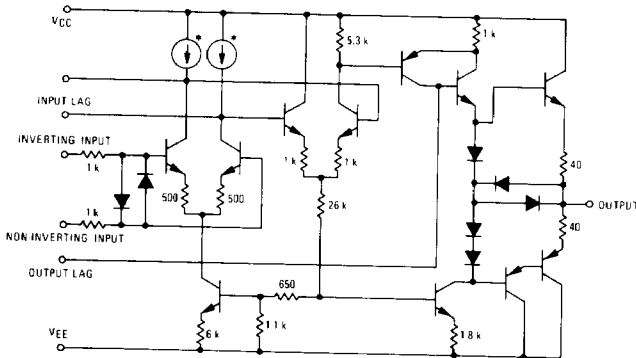


FIGURE 5 – EQUIVALENT CIRCUIT




TYPICAL OUTPUT CHARACTERISTICS

(V_{CC} = +15 Vdc, V_{EE} = -15 Vdc, T_A = +25°C)

| FIGURE NO. | CURVE NO. | VOLTAGE GAIN | TEST CONDITIONS (FIGURE 6) | | | | | |
|------------|-----------|------------------|----------------------------|--------------------|--------------------|--------------------|--------------------|---------------------|
| | | | R ₁ (Ω) | R ₂ (Ω) | R ₃ (Ω) | R ₄ (Ω) | R ₅ (Ω) | C ₁ (pF) |
| 7, 10, 12 | 1 | A _{vol} | 0 | ∞ | 0 | ∞ | ∞ | 0 |
| | 2 | 1 | 10k | 10k | 5.0k | 390 | 10k | 2200 |
| | 3 | 10 | 1.0k | 10k | 5.0k | 1.0k | 10k | 2200 |
| | 4 | 100 | 1.0k | 100k | 1.0k | 10k | 10k | 2200 |
| | 5 | 1000 | 1.0k | 1.0M | 1.0k | 30k | 10k | 1000 |
| | 6 | 1000 | 1.0k | 1.0M | 1.0k | 0 | 10k | 10 |
| 8 | 1 | A _{vol} | 0 | ∞ | 0 | ∞ | ∞ | 0 |
| | 2 | 1 | 10k | 10k | 5.0k | 390 | 10k | 2200 |
| | 3 | 10 | 1.0k | 10k | 5.0k | 1.0k | 10k | 2200 |
| | 4 | 100 | 1.0k | 100k | 1.0k | 10k | 10k | 2200 |
| | 5 | 1000 | 1.0k | 1.0M | 1.0k | 30k | 10k | 1000 |
| | 6 | 1000 | 1.0k | 1.0M | 1.0k | 0 | 10k | 10 |
| 13 | ALL | 1 | 10k | 10k | 5.0k | 390 | 10k | 2200 |
| 14 | ALL | 10 | 1.0k | 10k | 1.0k | 1.0k | 10k | 2200 |
| 15 | ALL | 100 | 1.0k | 100k | 1.0k | 10k | 10k | 2200 |
| 16 | ALL | 1000 | 1.0k | 1.0M | 1.0k | 30k | 10k | 2200 |

FIGURE 6 – TEST CIRCUIT

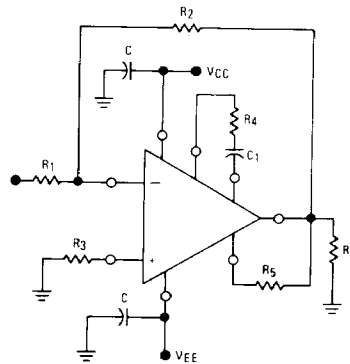

MC1439, MC1539

查询"MC1439G"供应商

TYPICAL CHARACTERISTICS (continued)

($V_{CC} = +15$ Vdc, $V_{EE} = -15$ Vdc, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

FIGURE 7 — LARGE-SIGNAL SWING versus FREQUENCY

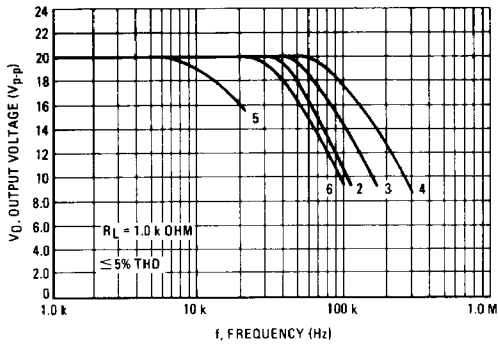


FIGURE 8 — OPEN-LOOP VOLTAGE GAIN versus FREQUENCY

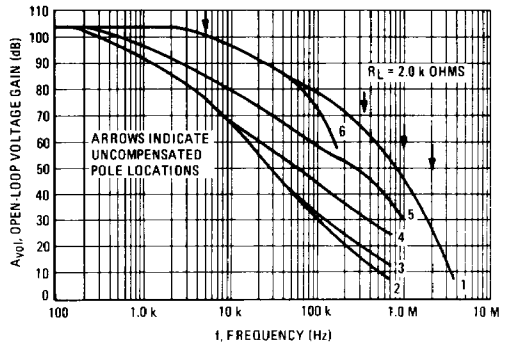


FIGURE 9 — OUTPUT VOLTAGE SWING versus LOAD RESISTANCE

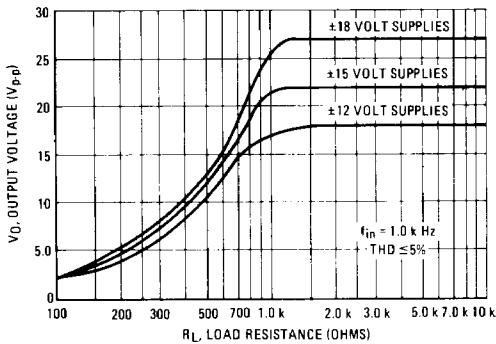


FIGURE 10 — OPEN-LOOP PHASE-SHIFT versus FREQUENCY

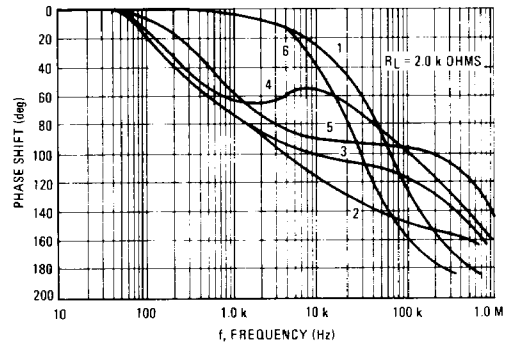


FIGURE 11 — OUTPUT VOLTAGE SWING (to clipping) versus SUPPLY


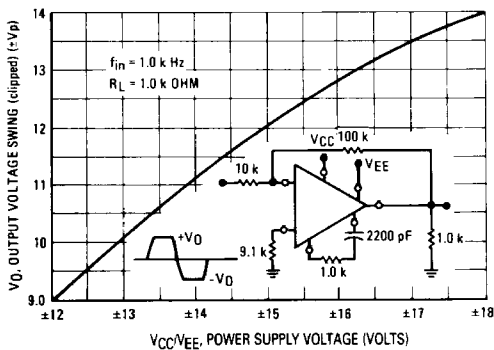


FIGURE 12 — CLOSED-LOOP GAIN versus FREQUENCY

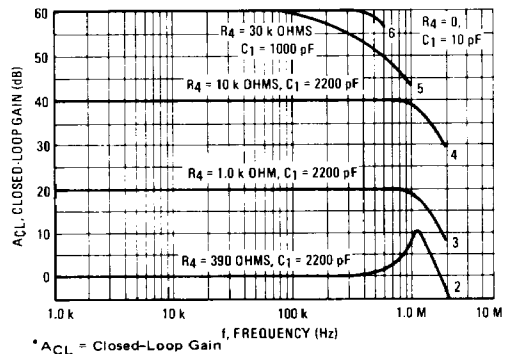

* A_{CL} = Closed-Loop Gain

2

MC1439, MC1539

查询"MC1439G"供应商

TYPICAL CHARACTERISTICS (continued)

($V_{CC} = +15\text{ Vdc}$, $V_{EE} = -15\text{ Vdc}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

2

FIGURE 13 — $A_{CL} = 1$ RESPONSE versus TEMPERATURE

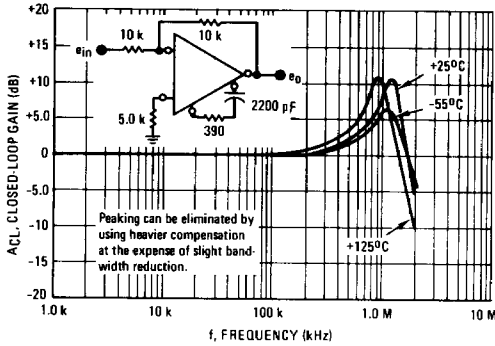


FIGURE 14 — $A_{CL} = 10$ RESPONSE versus TEMPERATURE

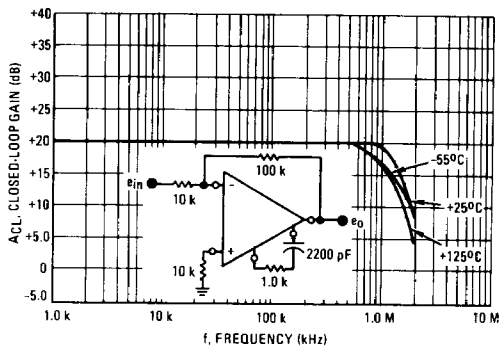


FIGURE 15 — $A_{CL} = 100$ RESPONSE versus TEMPERATURE

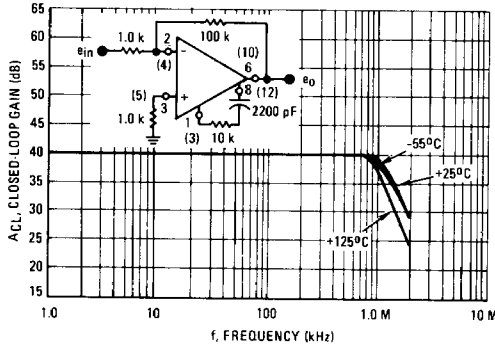


FIGURE 16 — $A_{CL} = 1000$ RESPONSE versus TEMPERATURE



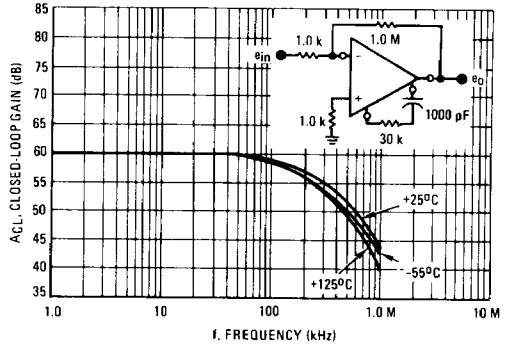


FIGURE 17 — SPECTRAL NOISE DENSITY

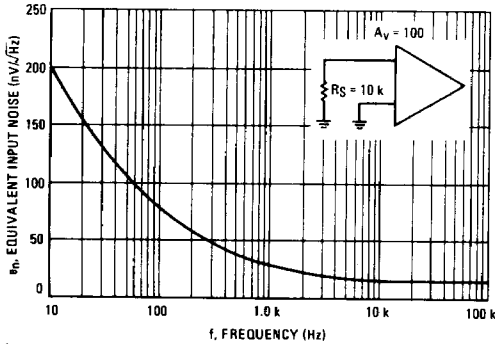

* A_{CL} = Closed-Loop Gain

FIGURE 18 — OUTPUT NOISE versus SOURCE RESISTANCE

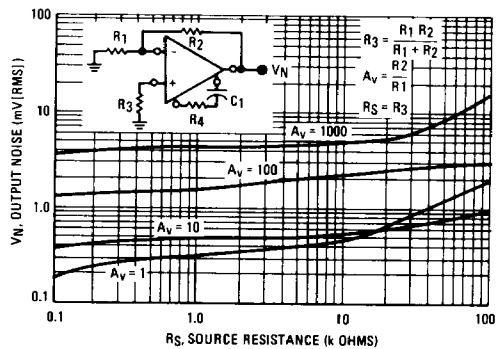

MC1439, MC1539

查询"MC1439G"供应商 TYPICAL CHARACTERISTICS (continued)

$V_{CC} = +15$ Vdc, $V_{EE} = -15$ Vdc, $T_A = +25^\circ\text{C}$, unless otherwise noted.

FIGURE 19 – POWER DISSIPATION versus TEMPERATURE

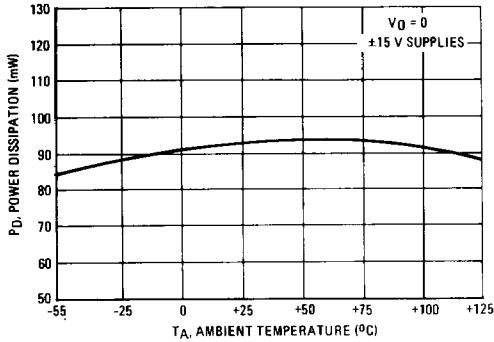


FIGURE 20 – POWER DISSIPATION versus POWER SUPPLY VOLTAGE

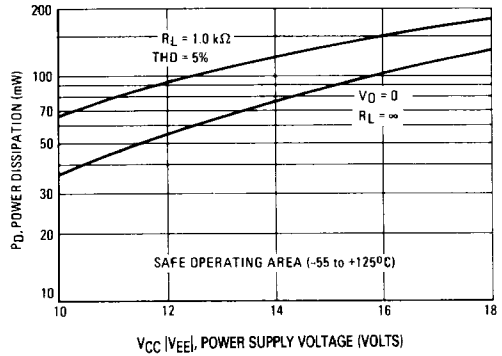


FIGURE 21 – POWER BANDWIDTH (LARGE-SIGNAL SWING versus FREQUENCY)

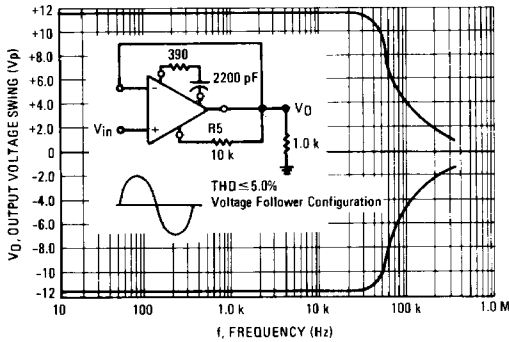


FIGURE 22 – COMMON-MODE INPUT VOLTAGE versus SUPPLY VOLTAGE

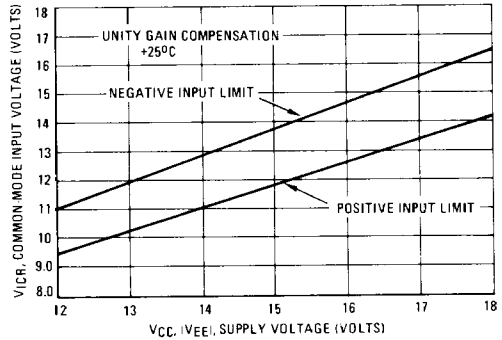


FIGURE 23 – COMMON-MODE REJECTION RATIO versus FREQUENCY


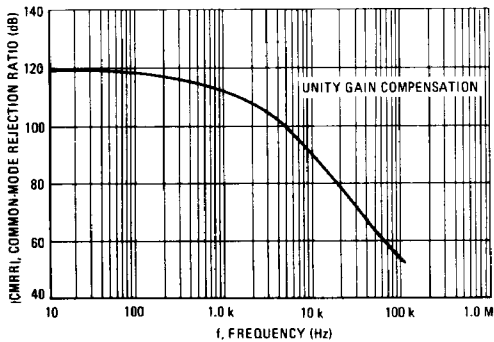



FIGURE 24 – COMMON-MODE REJECTION RATIO versus TEMPERATURE

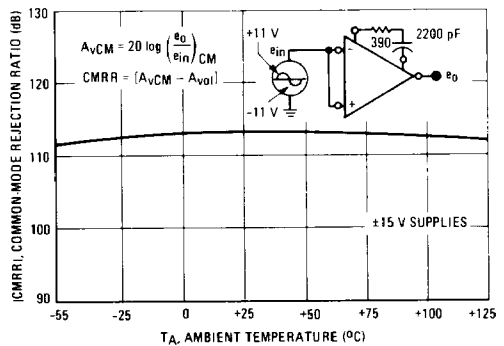

MC1439, MC1539

查询"MC1439G"供应商

FIGURE 25 - VOLTAGE-FOLLOWER PULSE RESPONSE

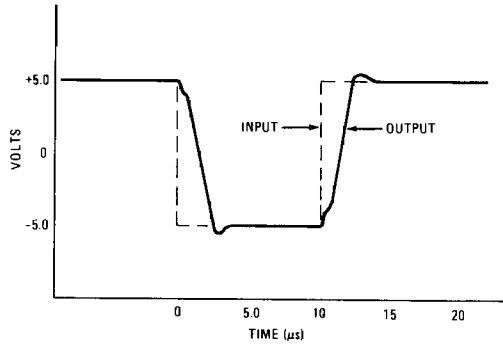

2

TYPICAL APPLICATIONS

FIGURE 26 - VOLTAGE FOLLOWER




FIGURE 27 - DIFFERENTIAL AMPLIFIER




FIGURE 28 - SUMMING AMPLIFIER


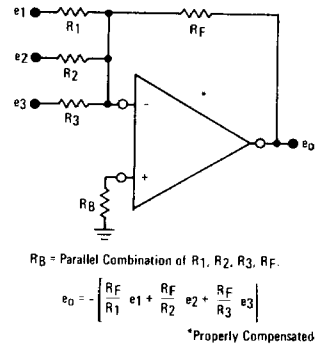


FIGURE 29 - +15 VOLT REGULATOR

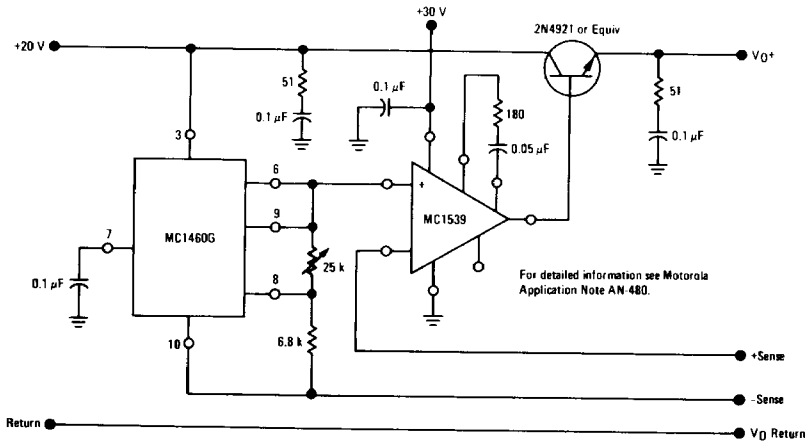

[查询"MC1439G"供应商](#)

2

TYPICAL APPLICATIONS (continued)

FIGURE 30 – LOAD REGULATION FOR
CIRCUIT OF FIGURE 29

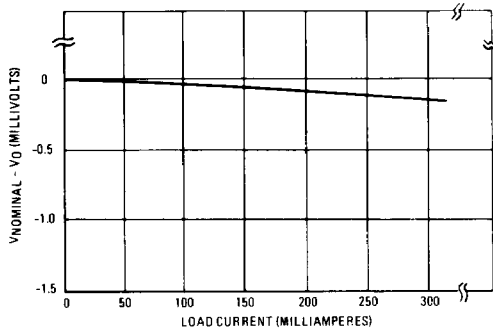


FIGURE 31 – REGULATOR OUTPUT VOLTAGE
(under pulsed load condition)

