






查询"0828"供应商

0828 SERIES


The 0828 filters are excellent for suppressing noise from switching power supplies and other devices where a considerable amount of common mode and differential mode electrical noise is present. This series is available with both 6.3mm terminals or with the IEC inlet connector

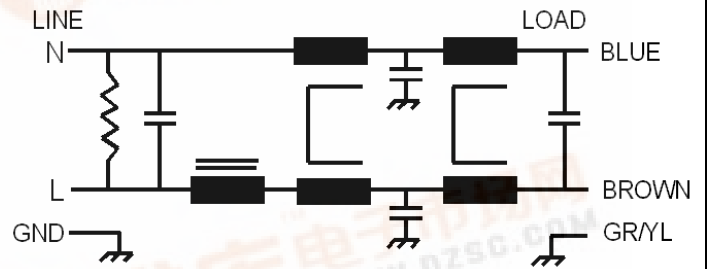

Operating Voltage = 115/250VAC
Operating Current = 1.5 amperes
Operating Frequency = 50/60 Hz
Operating Temperature = -10 to 50 deg. C
Dielectric Withstanding (Line-Ground) = 1500 VDC for 1 minute
Dielectric Withstanding (Line to Line) = 1500 VDC for 1 minutes
Leakage Current = 0.5 mA @ 250 VAC, 50Hz
Residual Voltage (Max after 5 sec.) = 25 Volts
Agency Approvals
UL, CSA, VDE

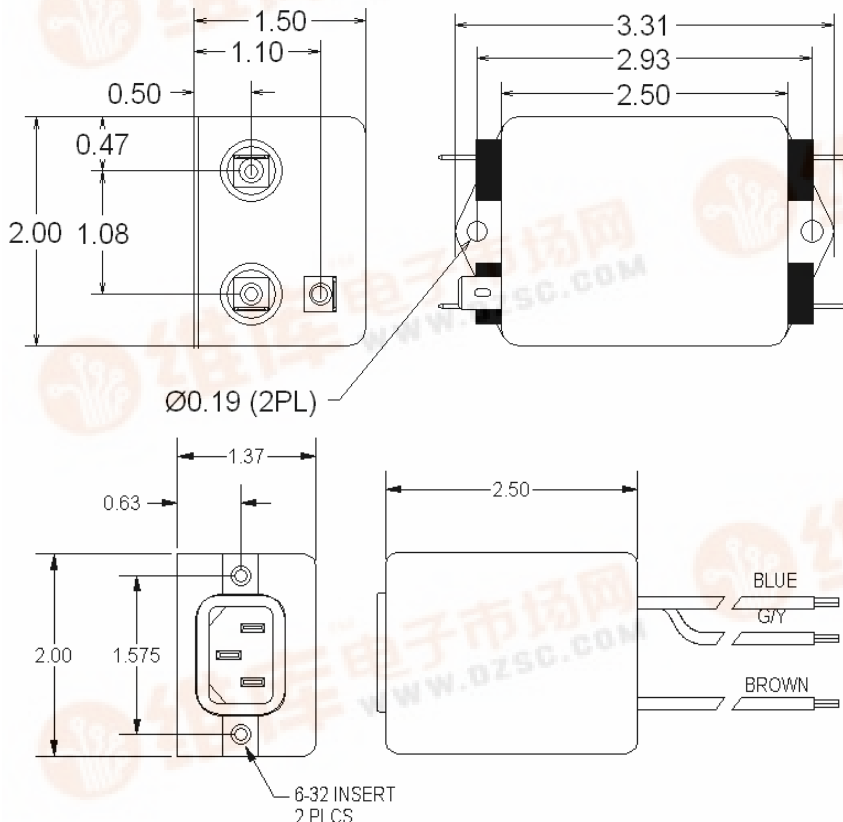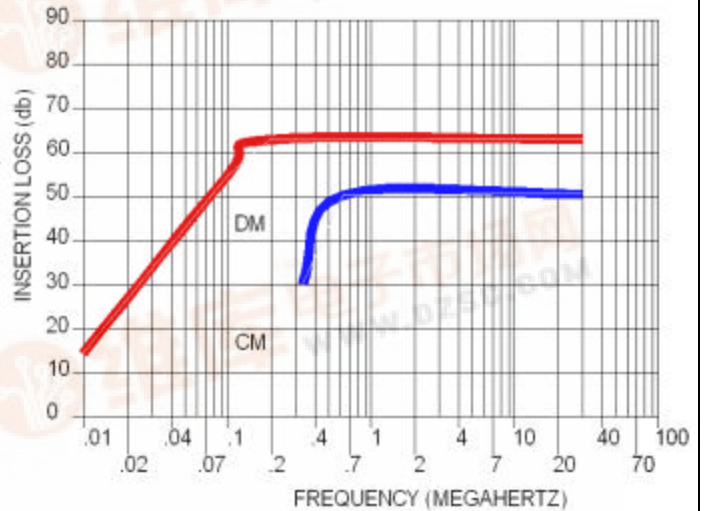

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884



维库电子市场网
 pdf.dzsc.com