

Cutler-Hammer 30.5mm Pushbuttons, Indicating Lights & Selector Switches Type 91000T



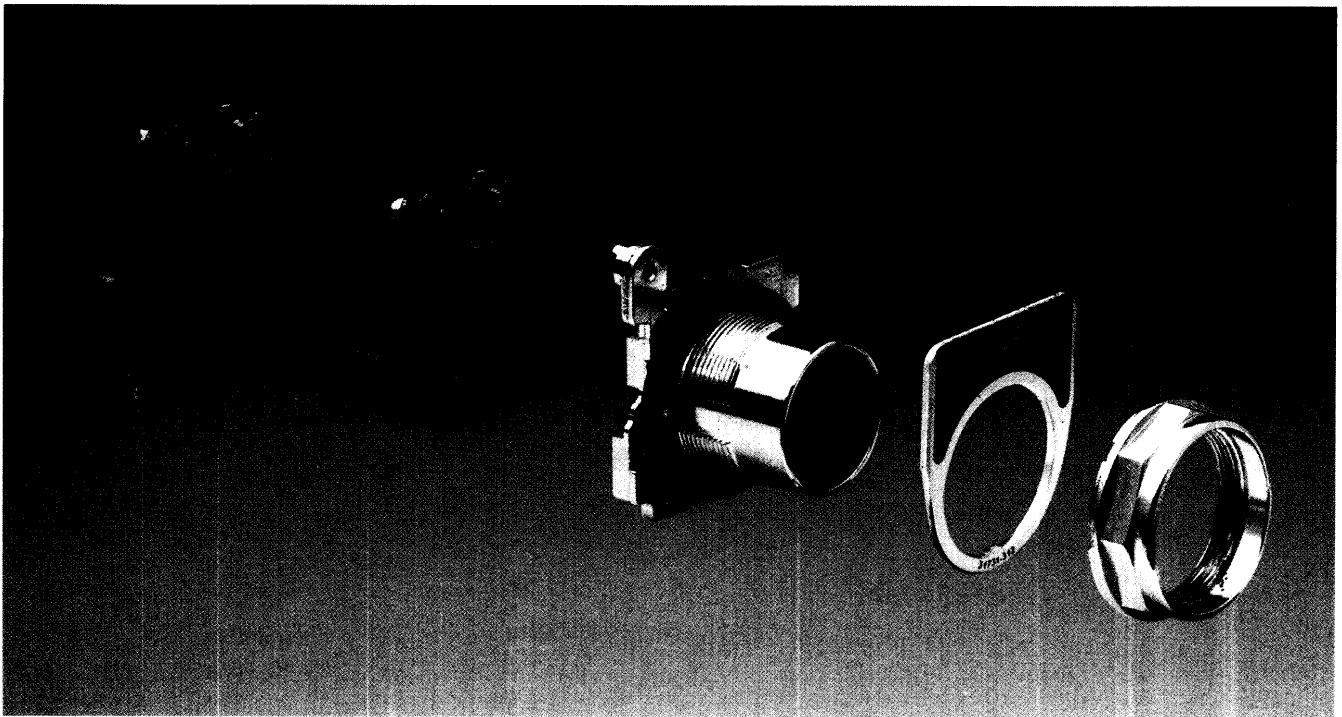
Cutler-Hammer

EAT•N


Cutler-Hammer 30.5mm Pushbuttons are versatile, durable, flexible and last the test of time ...

Even under the most hostile of environments


Modular in design




- Contact blocks contain up to 2 separate and distinct circuits and with the availability to stack up to 6 blocks per operator a total of 12 circuits can be achieved
- A diaphragm seal of neoprene ensures oiltightness for countless operations
- Smooth moulded plastic buttons with colour all the way through, together with strong indicating lights and a bright chrome finish give a look of distinction to any installation - permanently.

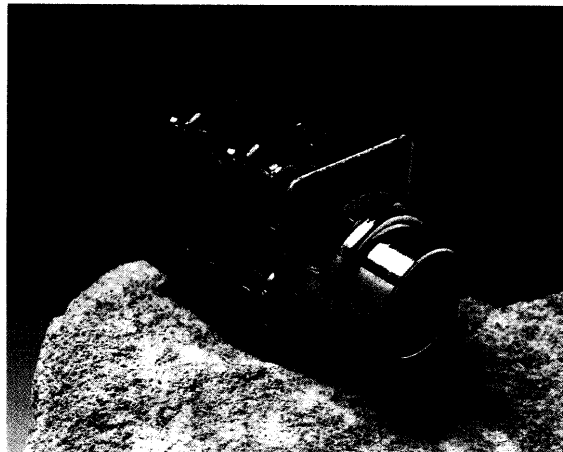


Attractive in appearance

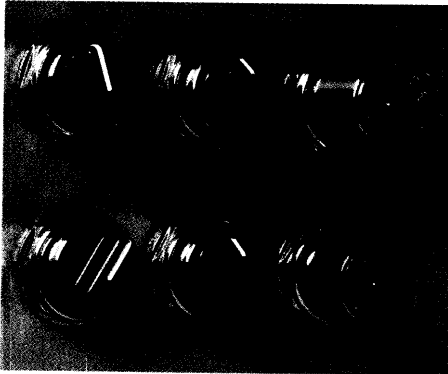


Selector switches

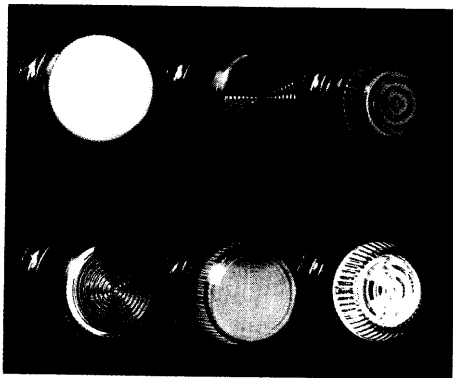

Indicating lights

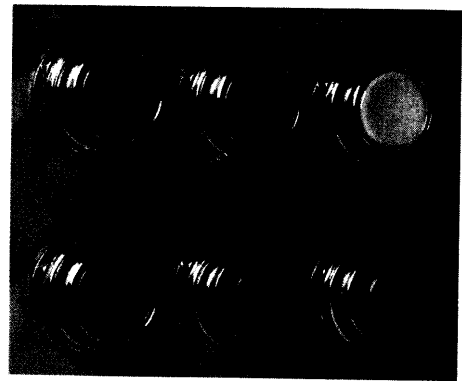

Pushbuttons

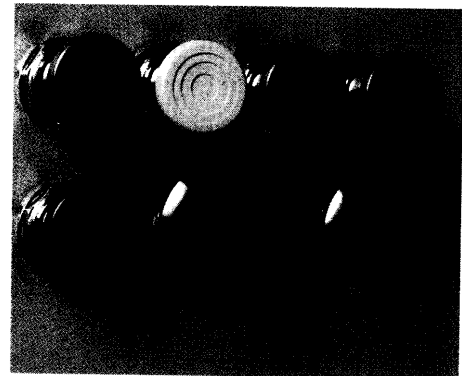

Mushroom pushbuttons



Accessories

Index







Pushbuttons	4 & 5
Mushroom pushes	4
Cylinder lock pushbuttons	5
Selector switches	6 & 7
Indicating lights	8 & 9
Roto-push pushbutton	10
Joystick controllers	11
Legend plates	12
Accessories	13 & 14
Pushbutton stations	15
Enclosures	16

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T


Pushbutton Operators

Pushbuttons

Operators

Description		Button colour	Catalogue numbers	Overall dimensions (mm)	Weight (kg)
Flush button 		Black	91000T101		0.093
		Red	91000T102		0.093
		Green	91000T103		0.093
		Yellow	91000T104		0.093
		White	91000T106		0.093
		Blue	91000T108		0.093
	Extended button 		Black		91000T111
		Red	91000T112	0.093	
		Green	91000T113	0.093	
Padlockable, lockdown					
fitted with 38mm mushroom push		Red	91000TA45		0.95
Bare shaft operator					
for mushroom or palm push					
	Momentary, spring return		91000T100		0.095
	Auto-latch		91000T140		0.095
Operating pushes for bare shaft operators					
Mushroom 38.1mm		Black	91000T281		
		Red	91000T282		
		Green	91000T283		
		Yellow	91000T284		
		Blue	91000T288		
Palm 63.5mm		Black	91000T291		
		Red	91000T292		
		Green	91000T293		
Extended pushbutton		Red	91000T2820		
					



Mechanical push operators

Mechanical push operators																				
Description	Colour	Catalogue numbers	Overall dimensions (mm)	Weight (kg)																
	Black	91000TA85		0.015																
	Green	91000TA86		0.015																
	Red	91000TA87		0.015																
Flush push, long reach, 217mm	Black	91000TA97		0.015																
	Green	91000TA98		0.015																
	Red	91000TA99		0.015																
			<table><tr><td>Dimension</td><td>A</td><td colspan="2">B</td></tr><tr><td></td><td>Min</td><td>Max</td><td></td></tr><tr><td>Std. reach</td><td>35</td><td>127</td><td>8</td></tr><tr><td>Long reach</td><td>118</td><td>217</td><td>85</td></tr></table>	Dimension	A	B			Min	Max		Std. reach	35	127	8	Long reach	118	217	85	
Dimension	A	B																		
	Min	Max																		
Std. reach	35	127	8																	
Long reach	118	217	85																	

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Pushbutton Operators

Illuminated pushbuttons BA9s bayonet fitting. For replacement bulbs see page 14.



	Description	Supply voltage 50/60Hz	Catalogue numbers	Overall dimensions (mm)	Weight (kg)
 Operator	Transformer type	110/120	91000T411		0.19
	6V 1W secondary.	220/240	91000T412		0.19
	Bulb supplied	380/415	91000T413		0.19
		440/480	91000T414		0.19
	Direct voltage				
	Supplied without bulb	6 to 240	91000T441		0.093
BA9s bayonet bulbs (for use with 91000T441)					
 Lens	Filament type	6V (1W) flasher	28-2225-26		
		6.3V (1W)	28-2225-72		
		12V (1.2W)	28-2225-29		
		24V (1.2W)	28-2225-30		
		28V (1.12W)	28-2225-73		
		50V (1W)	28-2225-31		
		60V (1.2W)	28-2225-32		
	Neon type	110V (2.2W)	28-2225-24		
		110V (0.8mA)	28-2225-48		
		240V (1.5mA)	28-2225-49		

Plastic lens (for use with illuminated pushbuttons).

Colour	Catalogue numbers	Colour	Catalogue numbers	Colour	Catalogue numbers
Red	91000TC21	Amber	91000TC43	Clear	91000TC25
Green	91000TC22	Blue	91000TC24	White	91000TC26



Cylinder lock pushbuttons

Operators (Supplied with the standard lock and 2 keys, key ref. H661).

	Key position and pushbutton operation			Key removal positions	Catalogue numbers		Weight (kg)
	Left	Centre	Right				
	Lock-up	Free	Lock down	All	91000T430		0.185
	Blocked	Free	Push to lock	C & R	91000T437		0.185

Special lock selection: Add the appropriate suffix code from page 7. eg 91000T430H620.

Contact blocks

	Description	Catalogue numbers:		Overall dimensions (mm)	Weight (kg)
		One-hole mounting	Base mounting		
	1 N.O. 1 N.C.	91000T1	91000T6		0.025
	2 N.O.	91000T2	91000T7		0.025
	2 N.C.	91000T3	91000T8		0.025
	1 N.C.	91000T51	91000T52		0.025
	1 N.O.	91000T53	91000T54		0.025
	2 N.O. 2 N.C.	91000T44	–		0.025
	1 N.O. 1 N.C. make before break	91000T55	–		0.025

Note:




A maximum of 6 blocks (12 circuits) may be fitted to each operator except for 91000T44 where a maximum of 4 blocks (16 circuits) may be fitted.

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Selector Switches

Knob operated selector switches

Bare shaft operator

	Description	Cam code	Catalogue numbers	Overall dimensions (mm)	Weight (kg)
	2-position				
	Stayput	1	91000T4011		0.115
	Spring return right to left	1	91000T4081		0.115
	3-position				
	Stayput	2	91000T4022		0.115
		3	91000T4023		0.115
		4	91000T4024		0.115
		6*	91000T4026		0.115
	Spring return from left, stayput centre and right	2	91000T4032		0.115
		3	91000T4033		0.115
	Spring return to centre from left and right	2	91000T4042		0.115
		3	91000T4043		0.115
	Stayput left and centre, spring return from right	2	91000T4052		0.115
		3	91000T4053		0.115
	Knob (for any operator)		91000TKB		
	Lever (for any operator)		91000TLB		

Cam selection chart showing contact sequence

To determine the number of the cam you require and the right contact block select the contact sequence desired from table below. O = contacts open, X = contacts closed. The cam number is shown at top of column. The catalogue number of the appropriate contact block is shown at extreme left of table.

Catalogue numbers of contact block	Base mounting	Circuit (see note (1) at foot of table)	2-position selector switch	3-position selector switch			
			Cam code no. 1	Cam code no. 2	Cam code no. 3	Cam code no. 4	Cam code no. 6 †
91000T1	91000T6	A N.C.	XO	OXO	OXX	XOO	XOO
		B N.O.	OX	OOX	OOX	OXO	OXO
91000T1	91000T6	A N.O.	OX	XOX	XOO	OXX	OOX
		B N.C.	XO	XXO	XXO	XOX	OOX
91000T2	91000T7	A N.O.	OX	XOX	XOO	OXX	OOX
		B N.O.	OX	OOX	OOX	OXO	OXO
91000T3	91000T8	A N.C.	XO	OXO	OXX	XOO	XOO
		B N.C.	XO	XXO	XXO	XOX	OOX

Switching angle.

60° between each position.

Note:

(1) Each contact block contains two contact circuits. The top set of contacts is identified as 'Circuit A' and the lower set as 'Circuit B' is indicated in the table. The chart shows the contact arrangements with the three contact blocks available and in each operator position. Additional contact combinations are obtainable by stacking contact blocks in tandem up to a maximum of 6 blocks (12 circuits).




† A maximum of 2 are to be used with cam 6. Rated to A.C. only.

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Selector Switches

Key operated selector switches

Operators (Supplied with the standard lock and 2 keys, key ref. H661)

Description		Cam code	Key removal position	Catalogue numbers Vertical mounting *	Horizontal mounting *	Overall dimensions (mm)	Weight (kg)
	2-position						
	Stayput	1	Right & left	91000T15113	91000T16113		0.185
	Spring return right to left	1	Left only	91000T15712	91000T15812		0.185
	3-position						
	Stayput	2	Left, right & centre	91000T15227	91000T16227		0.185
		3		91000T15237	91000T16237		0.185
		4		91000T15247	91000T16247		0.185
		6		91000T15267	91000T16267		0.185
	Spring return from left	2	Right & centre	91000T15325	91000T16325		0.185
		3		91000T15335	91000T16335		0.185
	(spring return to centre from left and right)	2	Centre only	91000T15424	91000T16424		0.185
		3		91000T15434	91000T16434		0.185
	Spring return from right	2	Left & centre	91000T16526	91000T16626		0.185
		3		91000T16536	91000T16636		0.185


* **Vertical mounting** means terminals are left & right of contact block.

Horizontal mounting means terminals are top & bottom of contact block. This allows close spacing of adjacent operators with easy access to terminals.

Alternative key removal position selection

To select an alternative key removal position change the last digit of the listed catalogue number with a code from the table below e.g. 91000T1522**6** is a 3 position stayput switch with key removal from left and centre.

Key removal position	Suffix
Right	1
Left	2
Right and Left	3
Centre	4
Right and Centre	5
Left and Centre	6
All Positions	7



Note: Select one suffix number only. Key removal in a spring return position is not available.

Special lock selection

To select an alternative lock add the suffix code from the table below to the operator catalogue number e.g. 91000T15113**H621**

Special lock Suffix	Suffix
H620	H654
H621	H663
H634	H675
H635	H683
H639	H688
H643	–





Special locks are supplied with two keys. Extra keys may be ordered, refer to accessories page 14.

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Indicating Lights

Standard indicating lights

Lamp units Bulbs supplied with units unless otherwise stated. For replacement light bulbs see page 14

	Description	Supply volts 50/60Hz	Catalogue numbers	Overall dimensions (mm)	Weight (kg)
	Transformer type	110/120	91000T181N		0.22
	6V 1W secondary BA9s	220/240	91000T182N		0.22
	bayonet bulb under rated by 10% for longer life.	380/415	91000T183N		0.22
		550/600	91000T185N		0.22
	Resistor type				
	120V 2.2W	110/120	91000T201N		0.112
	BA9s bayonet bulb	220/240	91000T202N		0.112
	Direct voltage unit (MCC/MBC)				
	Supplied without bulb. Suitable for BA9s bayonet bulbs	6 to 240	91000T197N		0.11
	BA9s bayonet bulbs (for use with 91000T197N)				
	Filament type				
	6V (1W) flasher		28-2225-26		
	6.3V (1W)		28-2225-72		
	12V (1.2W)		28-2225-29		
	24V (1.2W)		28-2225-30		
	28V (1.12W)		28-2225-73		
	50V (1W)		28-2225-31		
	60V (1.2W)		28-2225-32		
	110V (2.2W)		28-2225-24		
	Neon type				
	110V (0.8mA)		28-2225-48		
	240V (1.5mA)		28-2225-49		
	Direct voltage unit (SBC)				
	Supplied without bulb. Suitable for BA15d bayonet bulb	6 to 240	91000T200N		0.11
	BA15d bulbs (filament type)				
	6		28-2225-18		
	6 – 10 watt.	12	28-2225-19		
	For use with 91000T200N	24	28-2225-20		
		48	28-2225-21		
		130	28-2225-22		
		240	28-2225-23		

Lenses

Colour	Catalogue numbers Plastic		Glass	
Red	91000TC1N		91000TC7N	
Green	91000TC2N		91000TC8N	
Amber	91000TC19N		91000TC9N	
Blue	91000TC4N		91000TC10N	
Clear	91000TC5N		91000TC11N	
White	91000TC6N		91000TC12N	

L.E.D.s

Description	Operating voltage	Catalogue numbers Red	Green	Yellow
Multi-cluster for long life (50,000 hrs)	8/9V ac/dc	28-2225-60	28-2225-61	28-2225-62
	12V ac/dc	28-2224-63	28-2225-64	28-2225-65
BA9s bayonet fitting	24V ac/dc	28-2225-66	28-2225-67	28-2225-68



All LED's are suitable for light unit 91000T197N. 8/9V versions are also suitable for transformer type light units 91000T181N – 185N.

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Indicating Lights

Pretest indicating lights

Lamp units For replacement light bulbs see page 14.

	Description	Supply volts 50/60Hz	Catalogue numbers	Overall dimensions (mm)	Weight (kg)
	Transformer type	110/120	91000T221N		0.29
	6V 1W secondary	220/240	91000T222N		0.29
	BA9s bayonet bulb	380/415	91000T223N		0.29
	underrated by 10% for longer life				
	Resistor type	110/120	91000T231N		0.185
	120V 2.2W	220/240	91000T240N		0.185
	BA9s bayonet bulb				
	Direct voltage unit (MCC/MBC)				
	Suitable for BA9s bayonet bulbs	6 to 240	91000T230N		0.175
	BA9s bayonet bulbs (for use with 91000T230N)				
	Filament type	6.3V (1W)	28-2225-72		
		12V (1.2W)	28-2225-29		
		24V (1.2W)	28-2225-30		
		50V (1W)	28-2225-31		
		60V (1.2W)	28-2225-32		
		110V (2.2W)	28-2225-24		
	Neon type	110V (0.8mA)	28-2225-48		
		240V (1.5mA)	28-2225-49		



Lenses

	Colour	Catalogue numbers Plastic	Glass
	Red	91000TC21	91000TC13N
	Green	91000TC22	91000TC14N
	Amber	91000TC43	91000TC15N
	Blue	91000TC24	91000TC16N
	Clear	91000TC25	91000TC17N
	White	91000TC26	91000TC18N

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Pushbutton Operators


Roto-push pushbutton (a combined selector switch and pushbutton)

Description	Button colour	Catalogue numbers		Overall dimensions (mm)	Weight (kg)
		Vertical mounting	Horizontal mounting		
	Black	91000T241*	91000T251*		0.128
	Green	91000T243*	91000T253*		0.128

* Complete the catalogue number by adding the respective cam code number from the table below. Example: 91000T241**11** is a 2 position roto-push for use as shown below.

Typical application run-inch, start-inch

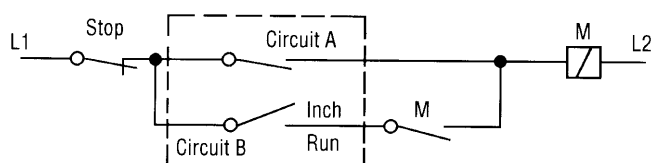2 position roto-push 91000T24111 + 91000T1



With the roto-push sleeve turned to Inch depression of the push energises coil M through circuit A only so long as the push is pressed i.e. the motor will inch. With the roto-push sleeve turned to Run, the roto-push contact connected to the maintaining contact of M through circuit B is permanently closed, thus when the push is pressed (circuit A) M will close and maintain itself and the motor will run.

Cam selection chart showing contact sequence

O = contacts open, X = contacts closed. The catalogue number of the appropriate contact block is shown at extreme left of table.

Catalogue number of contact block		Button position	Circuit +	2 position operators								3 position operators		
One hole mounting	Base mounting			Cam code number								7	8	9
				1	2	3	4	5	6	10	11			
91000T1	91000T6	N	A N.C.	XX	XX	XO	XX	XX	XO	XX	XX	XXX	XOX	XOO
		N	B N.O.	OO	OO	OX	OX	OX	OX	OX	OX	XXX	XXX	XXX
		D	A N.C.	XO	XO	OO	OO	XO	XO	OX	OO	OXO	OOX	XOO
		D	B N.O.	XO	XX	XX	XX	OX	XX	OX	OX	XXX	XXX	XXX
91000T1§	91000T6§	N	A N.O.	OO	OO	OX	OO	OO	OX	OO	OO	OOO	OXO	OOX
		N	B N.C.	XX	XX	XO	XO	XO	XO	XO	XO	XOO	XOX	XXO
		D	A N.O.	OX	OX	XX	XX	OX	OX	XO	XX	XOX	XXO	OXO
		D	B N.C.	OX	OO	OO	OO	XO	OO	XO	XO	XOO	XOO	XXO
91000T2	91000T7	N	A N.O.	OO	OO	OX	OO	OO	OX	OO	OO	OOO	OXO	OOX
		N	B N.O.	OO	OO	OX	OX	OX	OX	OX	OX	XXX	XXX	XXX
		D	A N.O.	OX	OX	XX	XX	OX	OX	XO	XX	XOX	XXO	OXO
		D	B N.O.	XO	XX	XX	XX	OX	XX	OX	OX	XXX	XXX	XXX
91000T3	91000T8	N	A N.C.	XX	XX	XO	XX	XX	XO	XX	XX	XXX	XOX	XOO
		N	B N.C.	XX	XX	XO	XO	XO	XO	XO	XO	XOO	XOX	XXO
		D	A N.C.	XO	XO	OO	OO	XO	XO	OX	OO	OXO	OOX	XOO
		D	B N.C.	OX	OO	OO	OO	XO	OO	XO	XO	XOO	XOO	XXO

Note: Cam codes 6 & 7 are for ac use only.

† Each contact block contains two contact circuits. The top set of contacts is identified as 'circuit A' and the lower set as 'B'. The table shows contact arrangement of each contact block with the operating button in normal and depressed positions and in each rotary sleeve position. Additional combinations are obtainable by stacking contact blocks in tandem.

§ These contact blocks are the same as the ones above except rotated 180° when assembled to the operator.

Switching angle: 60°

N = Button in free or normal position


D = Button depressed

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T


Joystick Controllers

Operators

Eight circuit
Non-latched operator



Latched operator



- ☐ Supplied with 4 position gate fitted
- ☐ 3 additional gates supplied which allows conversion to 2, 3 or 8 positions. (T1030, T1050, T1020)
- ☐ Up to eight switching positions
- ☐ Up to twelve circuits.
- ☐ Each circuit N.O. or N.C. as required a.c. or d.c.

Description	Catalogue numbers Without latch:	With off position latch:
Spring return only	91000T450	91000T460
Field adjustable spring return to stayput	91000T451	91000T461


Contact blocks

Description	Catalogue numbers
1 N.O. – N.C.	91000T1
2 N.O.	91000T2
2 N.C.	91000T3
1 N.O. 1N.C. make before break	91000T55



Legend plates

Description	Catalogue numbers
Blank	91000TJS1
Engraved	91000TJS2
Hole plug	91000TA700

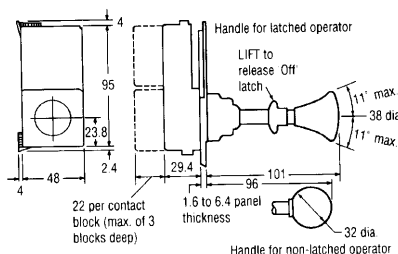Overall dimensions (mm)



Panel drilling dimensions (mm)



With controllers mounted adjacent to each other
A = 101.6 B = 111.1
With 91000T pushbuttons or indicating light mounted adjacent to joystick controller
A = 60.3 B = 95.2

Positioning gate 91000T1010 is fitted as standard to each operator

The arrows shown in the 'Handle position' column A indicates the handle positions and movements available when the indent mark on the gate is adjacent to the letter A on the handle assembly base casting. (No indent mark is provided on gates 91000T1010 and T1020).

Gate profile	Handle position				Catalogue numbers
	A	B	C	D	
					91000T1010
					91000T1020
					91000T1030
					91000T1040
					91000T1050
					91000T1060
					91000T1070
					91000T1080
					91000T1090

Gate profile	Handle position				Catalogue numbers
	A	B	C	D	
					91000T1100
					91000T1110
					91000T1120
					91000T1130
					91000T1130*
					91000T1140
					91000T1150
					91000T1150*
					91000T1160

* These positioning gates are identical with the one immediately above them. The handle positions shown against these profiles are obtained when the positioning gate is fitted with the indent mark not visible i.e. in contact with the common gate.

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Legend Plates

Catalogue numbers



Medium



Large

Legend	Catalogue numbers		Legend	Catalogue numbers		Legend	Catalogue numbers	
	Medium	Large		Medium	Large		Medium	Large
Auto off hand	91000T	91000T	Inch Run	91000T	91000T	Raise	91000T	91000T
(Blank)	M49	J49	Inch Safe Run	M41	J41	Raise Lower	M28	J28
(Blank)§	M36	J36	Jog	M52	J52	Ready	M76	J76
(Blank)	M37	J37	Left	M19	J19	Reset	M78	J78
(Blank)§	M95†	J95†	Left Right	M73	J73	Reverse	M29	J29
Close	M96†	J96†	Local Off	M74	J74	Right	M30	J30
Down	M11	J11	Remote			Run	M79	J79
Emerg Stop§	M12	J12	Local Remote	M66	J66	Run Inch	M31	J31
Emergency	M13	–	Low	M63	J63	Safe Run	M44	J44
Stop§	–	J13	Lower	M22	J22	Seq. Test	M45	J45
Fast	M14	J14	Man Auto	M23	J23	Slow	M62	J62
For Off Rev	M50	J50	Man Off Auto	M67	J67	Slow Fast	M32	J32
For Rev	M38	J38	Motor Run	M68	J68	Slow Off Fast	M84	J84
Forward	M38	J38	Motor Running	M58	J58	Start	M85	J85
Hand Auto	M15	J15	Motor Stop§	M56	J56	Start Inch	M33	J33
Hand Off Auto	M39	J39	Motor Stopped	M59	J59	Start Stop	M46	J46
High	M51	J51	O§	M57	J57	Stop§	M47	J47
High Low	M16	J16	Off§	M64	J64	Stop Reset§	M34	J34
I	M40	J40	Off On	M24	J24	Stop (Turn barrel	M88	J88
In	M65	J65	On	M42	J42	to release)§	M90	–
Inch	M17	J17	Open	M25	J25	Supply On	M61	J61
Inch For	M18	J18	Open Close	M26	J26	Test	M60	J60
Inch Forward	M20	–	Open Off Close	M43	J43	Up	M35	J35
Inch Rev	–	J20	Out	M53	J53	Up Down	M48	J48
Inch Reverse	M21	–	Power On	M27	J27	Up Off Down	M54	J54
	–	J21		M55	J55			

The standard colour field is black, except for those legends marked § for which the standard colour is red. Legends marked thus † are of brass. All other legends are of aluminium.

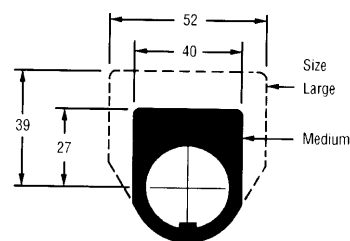
Non-standard legends

If a legend not quoted above is required, give the blank catalogue number for the size/colour and add the suffix 'X' to the code, indicating (e.g. by dashes not to be reproduced on the plate) the number of positions to be catered for, e.g. M36X JET-OFF-SPRAY (medium, black, 3-position).

The following table gives the maximum number of letters of a certain size which can be engraved on standard legend plates.

Dimensions (mm)

Note: Two large size legend plates cannot be mounted one above the other on standard enclosures.




Type	Letter size (mm)		3.2		4.8		6.4		8		9.5		12.7	
	No. of lines	No. of letters	No. of lines	No. of letters	No. of lines	No. of letters	No. of lines	No. of letters	No. of lines	No. of letters	No. of lines	No. of letters	No. of lines	No. of letters
Medium	3	24	2	12	1	8	1	6	1	4	1	4	–	–
Large	6	30	4	15	3	10	2	7	2	5	1	5	1	3

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Accessories

Catalogue numbers

	Description		Catalogue numbers
Padlock attachments			
	Padlock attachment for stop button. Permits locking N.C. contacts in open position, prevents operation of button		91000TA2
	Padlock attachment with hinged transparent flap, for flush or extended pushbuttons, and knob-operated selector switches		91000TA38
Boots			
	Protective boot for flush pushbutton operators	Blue	91000TA46
		Black	91000TA47
		Red	91000TA48
		Green	91000TA49
		Yellow	91000TA50
	Protective boot for mushroom and palm pushbutton operators. Not suitable for use with 91000T140	Black	91000TA88
	Protective boot for extended pushbutton operators	Black	91000TA3
		Red	91000TA4
		Green	91000TA10
Guards and shrouds			
	Guard sleeve for flush pushbutton		91000TA12
	Guard sleeve for mushroom head operator. Chrome finish. Prevents accidental operation. Not suitable for use with 91000T140		91000TA6
	Guard sleeve for illuminated pushbutton. Prevents accidental operation		91000TA15
Lever operator			
Description		Catalogue number	
	Lever for release of a staydown pushbutton or roto-push operator.	91000TA13	

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Accessories

Catalogue numbers (continued)

Trip and reset attachment

Description	Catalogue number
Trip and reset attachment. Use with two pushbutton operators and one or more contact blocks. The contact blocks are mounted under the reset or stop push which latches in the depressed position until released by depression of the trip push.	91000TA1



Replacement light bulbs *

Type	Voltage	Used on	Catalogue numbers
BA9s flasher filament	6	91000T181N – 185N 91000T221N – 223N 91000T411 – 414	28-2225-26
BA9s filament	6.3	91000T181N – 185N 91000T221N – 223N 91000T411 – 414	28-2225-72
BA9s filament	110/120	91000T201N,T202N 91000T231N,T240N	28-2225-24

* **Note:** Replacement bulbs are for use with current series 'B' operators. For replacement bulbs for series 'A' (round bezelled) operators contact Cutler-Hammer.

Bulb removal tool

BA9s and BA15d type bulbs	91000TA65
---------------------------	------------------

Other accessories

Description	Catalogue numbers
 Wobble stick complete with locking ring for mounting on a flush pushbutton. Designed for emergency or hurried operation	91000TA5
 Plug for unused hole in cover. Finish in light grey (RAL 7032)	91000TA7
 Protective washer, used as substitute when legend plate is not required. Prevents locking ring from scratching paint.	91000TA8
 Double ended box spanner for easy installation of control units on panel. (Will not fit over selector switch levers).	E22CW
 Box spanner. Notched to fit over selector switch levers.	91000TA95
 Boot spanner. For easy installation of operators fitted with protective boots.	91000TA96

Description	Catalogue numbers
 2 spare keys for special locks, state key 'H' code as suffix e.g. 91000TA151H620	91000TA151H*
 2 spare keys for standard lock ref. no. H661	91000TA152
4BA stacking screws for series A operators	91000TA89 (pack of 10)
6-32 stacking screws for series B operators	91000TA79 (pack of 10)
 Round bezel with 24 T.P.I. to convert octagonal style pushbutton operators to round	91000TA201
 Octagonal bezel with 26 T.P.I. to convert round style pushbutton operators to octagonal	91000TA202
Terminal boots. Provides IP20 (fingerproof protection) for terminals	91000TA81 (pack of 10)







Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Pushbutton Stations






Assembled pushbutton stations

Features and characteristics

- | | | |
|--|--|---|
| ☐ Oiltight stations | ☐ Surface mounted die-cast aluminium enclosures | ☐ Powder coat painted light grey (RAL7032) |
| ☐ IP65 ingress protection | ☐ Threaded conduit entry | |

Description	Operator	Contact arrangement	Catalogue numbers	Weight (kg)	Operator dimensions (mm)
Single way station 	Start	N.O. – N.C.	91000T3516	0.68	
Two way stations 	Start	N.O. – N.C.	91000T3525	0.98	
	Stop	N.C.			
	Start Mushroom stop (spring return)	N.O. – N.C. N.C.	91000T3526	0.98	
Three way stations 	Start Mushroom stop (auto latch)	N.O. – N.C. N.C.	91000T3630	0.98	
	Forward Reverse Stop	N.O. – N.C. N.O. – N.C. N.C.	91000T3532	1.3	
	Open Close Stop	N.O. – N.C. N.O. – N.C. N.C.	91000T3614	1.3	
Emergency stop stations	Up Down Stop	N.O. – N.C. N.O. – N.C. N.C.	91000T3615	1.3	

Emergency stop stations

	38mm dia. red mushroom push. Momentary spring return. Yellow lid.	N.C.	91000T3553	
	38mm dia. red mushroom push. Stop-lock, twist barrel to release. Yellow lid.	N.C.	91000T3554	
	63mm dia. red palm push. Stop lock, twist barrel to release. Yellow lid.	N.C.	91000T3555	

Note: For enclosure dimensions see page 16.

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T


Aluminium Alloy Enclosures

Catalogue numbers

Description Painted light grey (RAL7032) textured finish	Operator capacity per enclosure	Catalogue numbers One contact block deep:	Two contact blocks deep:	Three contact blocks deep:
	1	91000TN1	91000TN11	–
	1†	91000TN100	–	–
	2	91000TN2	91000TN12	–
	3	91000TN3	91000TN13	–
	4	91000TN4	91000TN14	–
	6	–	91000TN15	–
	9	–	91000TN16	–
	12	–	–	91000TN17
	16	–	–	91000TN18
4 operator enclosure				

† Enclosure has yellow lid


Covers only

Description	No. of operators per cover	Catalogue numbers Flat plate	Raised plate
	1	91000TF1	91000TF11
	2	91000TF2	91000TF12
	3	91000TF3	91000TF13
	4	91000TF4	91000TF14
	6	91000TF5	–
	9	91000TF6	–
	12	91000TF7	–
	16	91000TF8	–
Cover			

Accessories

Description	Catalogue numbers
Spacers  Used for base mounting contact blocks. One required for each operator plus additional spacer may be required to make up enclosure depth.	One contact block deep Two contact blocks deep 91000TA21 91000TA22

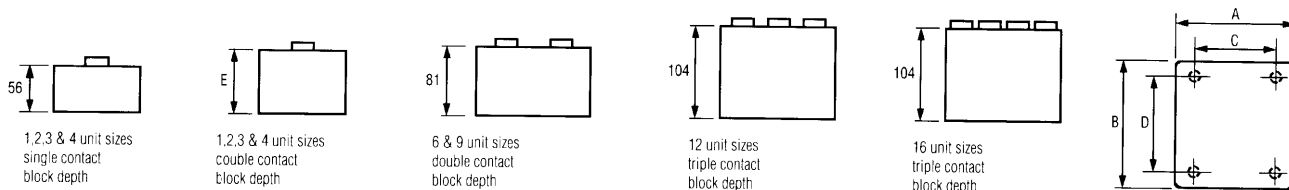Dimensions (mm)



Enclosure size	Dimensions					Conduit entry	Fixing holes	Weight (kg)
	A	B	C	D	E			
1 unit	97	102	68.3	82.6	69	20	5.6	0.050
2 unit	97	149	68.3	130.2	74	25	5.6	0.65
3 unit	97	197	68.3	177.8	74	32	5.6	0.775
4 unit	100	248	68.3	225	76	32	5.6	0.95
6 unit	187	225	161.9	200	–	32	5.6	2.75
9 unit	248	225	222.3	200	–	32	5.6	3.10
12 unit	245	270	219	244.5	–	1½ in.	7.1	4.30
16 unit	305	270	279.4	244.5	–	2 in.	7.1	5.175

Cutler-Hammer 30.5mm Pushbuttons – Type 91000T

Technical Data

Technical data

Standards and approvals

IEC 947-5-1, MTTA*
CSA C22-2 no. 14, UL508

Ingress protection (IP ratings to IEC144 (BS5420))

IP65
IP66, NEMA 4 on pushbuttons when fitted with a rubber boot
IP65 on enclosures

Max. frequency of operations

All pushbuttons: 6000 ops/hr.
Key and lever selector switch: 3000 ops/hr.
Auto-latch devices: 1200 ops/hr.

Mechanical life

Pushbuttons: 10 x 10⁶ operations
Contact blocks: 10 x 10⁶ operations
Pretest units: 1 x 10⁶ operations
Lever & key sel. sw.: 0.25 x 10⁶ operations
Twist to release p/btns: 0.3 x 10⁶ operations

Climatic conditions

Operating: Max 60°C at 95% RH.
Temp. -17°C to +66°C
Altitude 2000 metres
Storage: Max. 60°C at 95% RH.
Temp. -40°C to +80°C

Shock resistance

Shock duration: 20 ms ≥ 5g

Electrical ratings

Rated insulation: $U_i = 660V$ ac or dc
Rated thermal: $I_{th} = 10A$
Short circuit (IEC947-5-1): 1000A with a 6A (NIT) fuse (to BS88)
NEMA, UL rating: A600, P600
AC load life duty cycle 1200 ops/hr
10A 110V pf 0.4 - 1 x 10⁶ operations
5A 250V pf 0.4 - 1 x 10⁶ operations
2A 660V pf 0.4 - 1 x 10⁶ operations

Switching capacity

AC15 rated make/break (11 x I_e at 1.1 x U_e)
6A 120V pf 0.7
4A 240V pf 0.7
2A 660V pf 0.7
DC13 rated make/break (1.1 x I_e at 1.1 x U_e)
1.0A 120V L/R ≥ 0.95 at 300ms
0.5A 240V L/R ≥ 0.95 at 300ms
0.1A 660V L/R ≥ 0.95 at 300ms
10A 110V pure resistive

Light units

Transformers will withstand short circuit for 1 hour per IEC947-5-1.
Bulbs average life:
Transformer type = 20,000 hrs.
Resistor/direct voltage type = 2,500 hrs min. at rated voltage.

Low voltage switching

Conical shaped points or "reliability nibs" improve performance in dry circuit, corrosive, fine dust and other contaminated atmospheres. Under normal environmental conditions, the minimum operational voltage is 5V and the minimum operational current is 1mA, ac/dc.

Contact operation

Slow make and break. All normally closed contacts have positive opening operation. i.e. normally closed contacts are forced open in the event of contact weld or spring breakage.

Terminal marking

Dual marking system 1 – 2 for normally closed 3 – 4 normally open to meet BS5472 (Cenelec EN50 005) and N.C. – N.O. moulded in the contact block to meet the NEMA requirements.

Terminal clamps

Terminals are saddle clamp types for 1 x 0.5mm² to 2 x 3mm² conductors.

Panel thickness


Maximum = 8mm including legend plate.
Minimum = 1.6mm.

*M.T.T.A. (Machine Tool, Trades Association)


A range of pushbutton operators to meet the requirements of M.T.T.A. standard "Electrical Equipment of Machine tools and other industrial machines and equipment for the automobile industry" are included in the 91000T range.

Mounting matrix

Legend plate	A	B	C	D
Medium	57	45	45	57
Large	57	57	57	57



Horizontal mounting



Vertical mounting

Vertical mounting means terminals are left & right of contact block.
Horizontal mounting means terminals are top & bottom of contact block.
This allows close spacing of adjacent operators with easy access to terminals.