

TURBO 2 ULTRAFAST HIGH VOLTAGE RECTIFIER

MAIN PRODUCT CHARACTERISTICS

I_{F(AV)}	3 A
V_{RRM}	600 V
I_R (max)	100 µA
T_j (max)	175 °C
V_F (max)	1.05 V
trr (max)	85 ns


FEATURES AND BENEFITS

- Ultrafast switching
- Low reverse recovery current
- Reduces switching & conduction losses
- Low thermal resistance

DESCRIPTION

The STTH3L06, which is using ST Turbo 2 600V technology, is specially suited as boost diode in discontinuous or critical mode power factor corrections.

The device is also intended for use as a free wheeling diode in power supplies and other power switching applications.

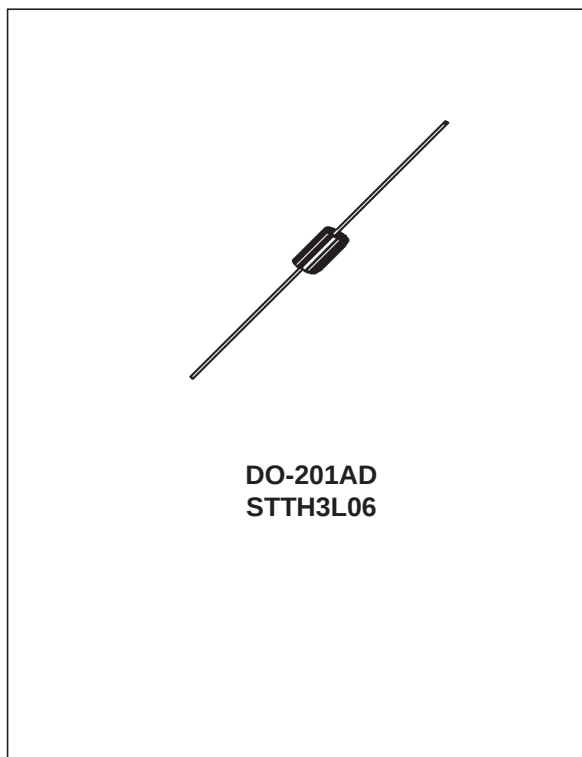

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
V _{RRM}	Repetitive peak reverse voltage		600	V
I _{F(RMS)}	RMS forward current		20	A
I _{F(AV)}	Average forward current	T _I = 100°C δ = 0.5	3	A
I _{FSM}	Surge non repetitive forward current	t _p = 10 ms Sinusoidal	80	A
T _{stg}	Storage temperature range		- 65 + 175	°C
T _j	Maximum operating junction temperature		+ 175	°C

STTH3L06

THERMAL PARAMETERS

Symbol	Parameter		Maximum	Unit
$R_{th(j-l)}$	Junction to lead	L = 10 mm	20	°C/W
$R_{th(j-a)}$	Junction to ambient (note 1)	L = 10 mm	75	

Note 1: With recommended pad layout (see Fig 12)

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
I_R	Reverse leakage current	$V_R = 600V$	$T_j = 25^{\circ}C$			3	μA
			$T_j = 150^{\circ}C$		15	100	
V_F	Forward voltage drop	$I_F = 3 A$	$T_j = 25^{\circ}C$			1.3	V
			$T_j = 150^{\circ}C$		0.85	1.05	

To evaluate the maximum conduction losses use the following equation :

$$P = 0.89 \times I_{F(AV)} + 0.055 I_{F(RMS)}^2$$

DYNAMIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	$I_F = 1 A$ $dI_F/dt = - 50 A/\mu s$ $V_R = 30V$	$T_j = 25^{\circ}C$		60	85	ns
t_{fr}	Forward recovery time	$I_F = 3 A$ $dI_F/dt = 100 A/\mu s$ $V_{FR} = 1.1 \times V_{Fmax}$	$T_j = 25^{\circ}C$			100	ns
V_{FP}	Forward recovery time	$I_F = 3 A$ $dI_F/dt = 100 A/\mu s$	$T_j = 25^{\circ}C$			7.5	V

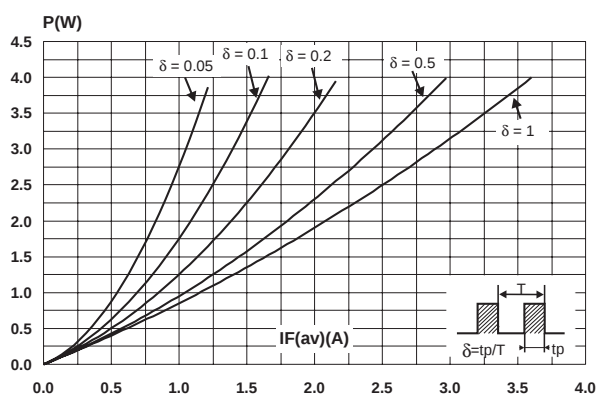
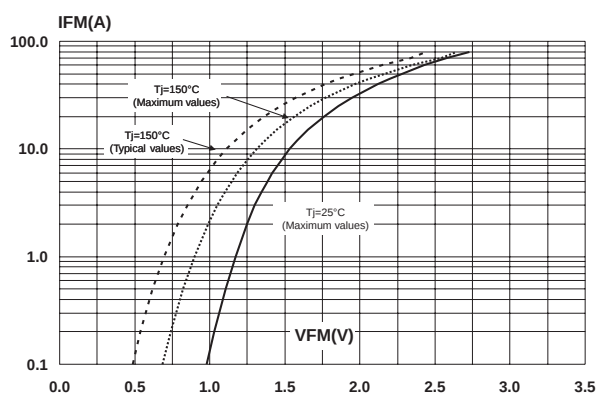
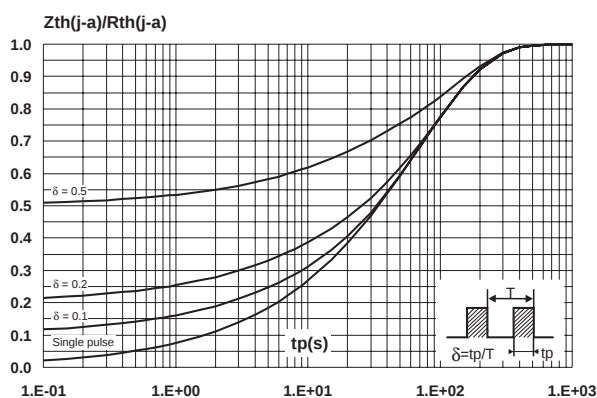
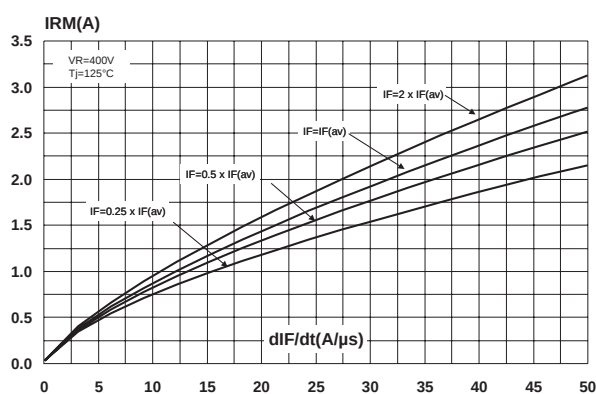
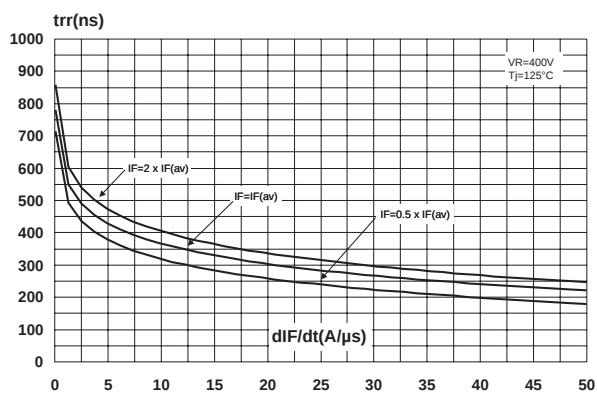
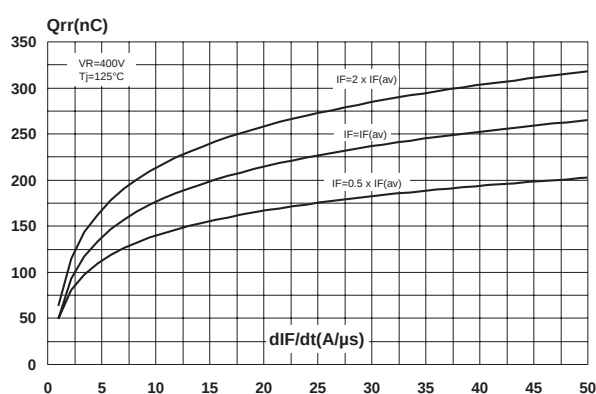
Fig. 1: Conduction losses versus average current.**Fig. 2:** Forward voltage drop versus forward current.**Fig. 3:** Relative variation of thermal impedance junction ambient versus pulse duration (epoxy FR4, Leads = 10mm)**Fig. 4:** Peak reverse recovery current versus di_F/dt (90% confidence).**Fig. 5:** Reverse recovery time versus di_F/dt (90% confidence).**Fig. 6:** Reverse recovery charges versus di_F/dt (90% confidence).

Fig. 7: Softness factor versus dI_F/dt (typical values).

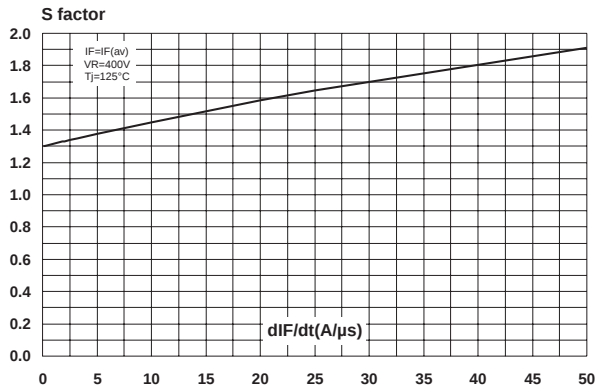


Fig. 8: Relative variations of dynamic parameters versus junction temperature.

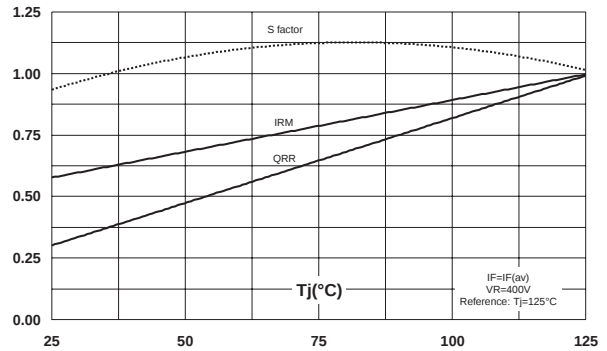


Fig. 9: Transient peak forward voltage versus dI_F/dt (90% confidence).

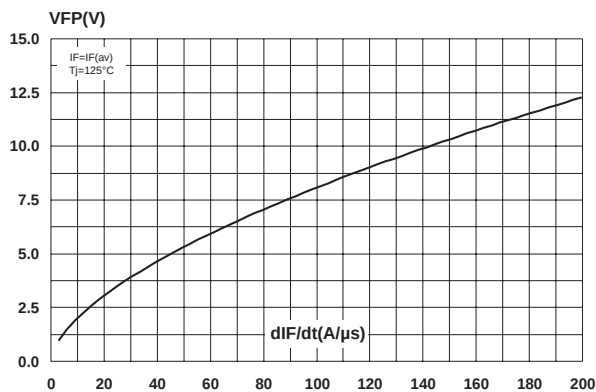


Fig. 10: Forward recovery time versus dI_F/dt (90% confidence).

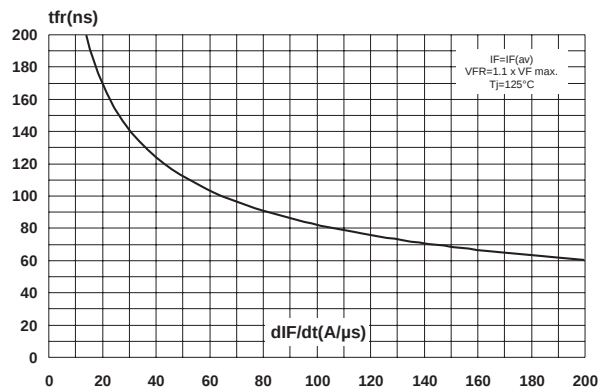


Fig. 11: Junction capacitance versus reverse voltage applied (typical values).



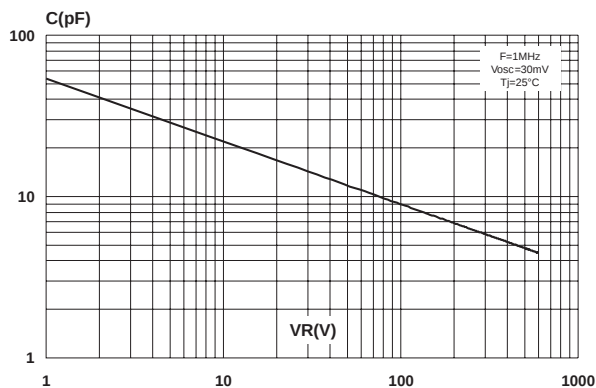


Fig. 12: Thermal resistance junction to ambient versus copper surface under each lead (Epoxy printed circuit board FR4, copper thickness: 35μm)

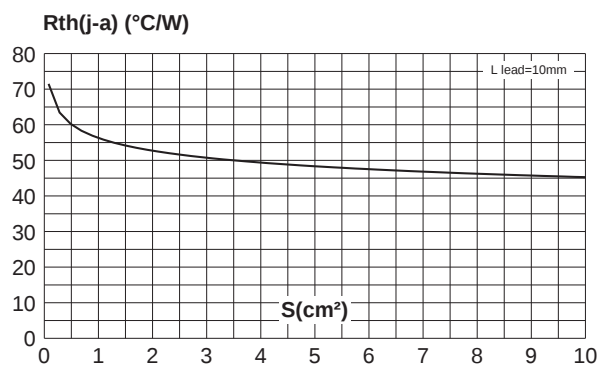

PACKAGE MECHANICAL DATA

DO-201AD

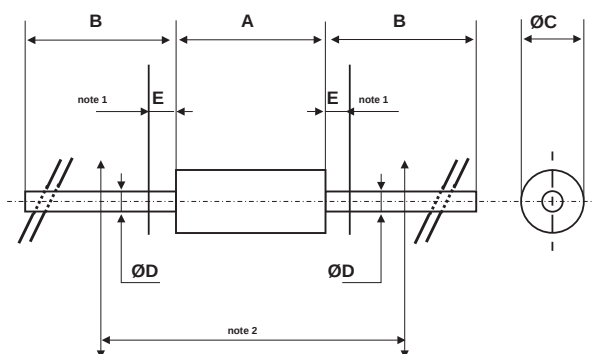

REF.	DIMENSIONS				NOTES
	Millimeters		Inches		
	Min.	Max.	Min.	Max.	
A		9.50		0.374	1 - The lead diameter Ø D is not controlled over zone E 2 - The minimum length which must stay straight between the right angles after bending is 0.59"(15 mm)
B	25.40		1.000		
C		5.30		0.209	
D		1.30		0.051	
E		1.25		0.049	

Ordering code	Marking	Package	Weight	Base qty	Delivery mode
STTH3L06	STTH3L06	DO-201AD	1.12 g	600	Ammopack
STTH3L06RL	STTH3L06	DO-201AD	1.12 g	1900	Tape & reel

- Epoxy meets UL 94,V0
- Band indicated cathode
- Bending method: Application note AN1471

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore
 Spain - Sweden - Switzerland - United Kingdom - United States.