



**3 Phase bridge**  
**NPT IGBT Power Module**


**$V_{CES} = 1200V$**   
 **$I_C = 10A @ T_c = 80^\circ C$**

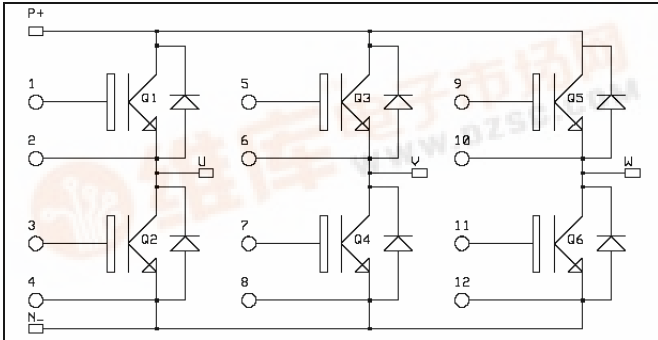

**Pin out: APTGF10X120E2 (Long pins)**

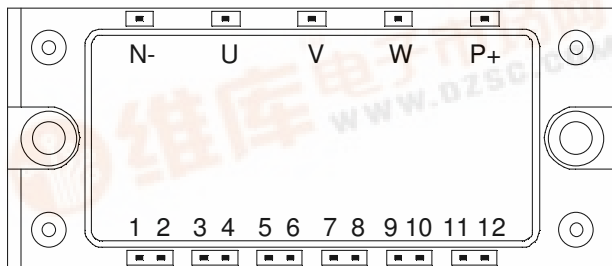

**Pin out: APTGF10X120P2 (Short pins)**

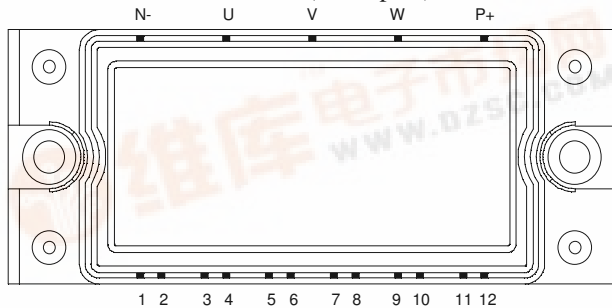

**Application**

- AC Motor control

**Features**

- Non Punch Through (NPT) IGBT®
  - Low voltage drop
  - Low tail current
  - Switching frequency up to 20 kHz
  - Soft recovery parallel diodes
  - Low diode VF
  - Low leakage current
  - Avalanche energy rated
  - RBSOA and SCSOA rated
- Kelvin emitter for easy drive
- Very low stray inductance
- High level of integration

**Benefits**

- Stable temperature behavior
- Very rugged
- Solderable terminals for easy PCB mounting
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Easy paralleling due to positive TC of VCEsat
- Low profile

**All ratings @  $T_j = 25^\circ C$  unless otherwise specified**

**Absolute maximum ratings**

Symbol	Parameter	Max ratings	Unit
$V_{CES}$	Collector - Emitter Breakdown Voltage	1200	V
$I_C$	Continuous Collector Current	$T_C = 25^\circ C$	15
		$T_C = 80^\circ C$	10
$I_{CM}$	Pulsed Collector Current	$T_C = 25^\circ C$	30
$V_{GE}$	Gate - Emitter Voltage	$\pm 20$	V
$P_D$	Maximum Power Dissipation	$T_C = 25^\circ C$	80
SCSOA	Short Circuit Safe Operating Area	$T_j = 125^\circ C$	100A@1200V



**Electrical Characteristics**

<i>Symbol</i>	<i>Characteristic</i>	<i>Test Conditions</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Unit</i>
$BV_{CES}$	Collector - Emitter Breakdown Voltage	$V_{GE} = 0V, I_C = 500\mu A$	1200			V
$I_{CES}$	Zero Gate Voltage Collector Current	$V_{GE} = 0V$ $V_{CE} = 1200V$		$T_j = 25^\circ C$ 200 $T_j = 125^\circ C$ 800	400	$\mu A$
$V_{CE(on)}$	Collector Emitter on Voltage	$V_{GE} = 15V$ $I_C = 10A$		$T_j = 25^\circ C$ 2.7 $T_j = 125^\circ C$ 3.3	3.2 3.9	V
$V_{GE(th)}$	Gate Threshold Voltage	$V_{GE} = V_{CE}, I_C = 0.35 mA$	4.5	5.5	6.5	V
$I_{GES}$	Gate - Emitter Leakage Current	$V_{GE} = 20V, V_{CE} = 0V$			120	nA

**Dynamic Characteristics**

<i>Symbol</i>	<i>Characteristic</i>	<i>Test Conditions</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Unit</i>
$C_{ies}$	Input Capacitance	$V_{GE} = 0V$		600		pF
$C_{oes}$	Output Capacitance	$V_{CE} = 25V$		60		
$C_{res}$	Reverse Transfer Capacitance	$f = 1MHz$		38		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (125°C)		55	110	ns
$T_r$	Rise Time	$V_{GE} = \pm 15V$ $V_{Bus} = 600V$		50	100	
$T_{d(off)}$	Turn-off Delay Time	$I_C = 10A$		380	570	
$T_f$	Fall Time	$R_G = 150\Omega$		80	120	

**Reverse diode ratings and characteristics**


<i>Symbol</i>	<i>Characteristic</i>	<i>Test Conditions</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Unit</i>
$V_F$	Diode Forward Voltage	$I_F = 10A$ $V_{GE} = 0V$		$T_j = 25^\circ C$ 2.9 $T_j = 125^\circ C$ 2.6	3.4	V
$t_{rr}$	Reverse Recovery Time	$I_F = 10A$ $V_R = 600V$ $di/dt = 400A/\mu s$		$T_j = 125^\circ C$ 0.5		$\mu s$
$Q_{rr}$	Reverse Recovery Charge	$I_F = 10A$ $V_R = 600V$ $di/dt = 400A/\mu s$		$T_j = 25^\circ C$ 0.4 $T_j = 125^\circ C$ 1.2		$\mu C$

**Thermal and package characteristics**

<i>Symbol</i>	<i>Characteristic</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Unit</i>	
$R_{thJC}$	Junction to Case	IGBT		1.55	°C/W	
		Diode		2		
$V_{ISOL}$	RMS Isolation Voltage, any terminal to case $t = 1 min$ , $I_{isol} < 1mA, 50/60Hz$	2500			V	
$T_j$	Operating junction temperature range	-40		150	°C	
$T_{STG}$	Storage Temperature Range	-40		125		
$T_C$	Operating Case Temperature	-40		125		
Torque	Mounting torque	To Heatsink	M5	2	3.5	N.m
Wt	Package Weight				185	g

**Package outline**


Pin out: APTGF10X120E2 (Long pins)

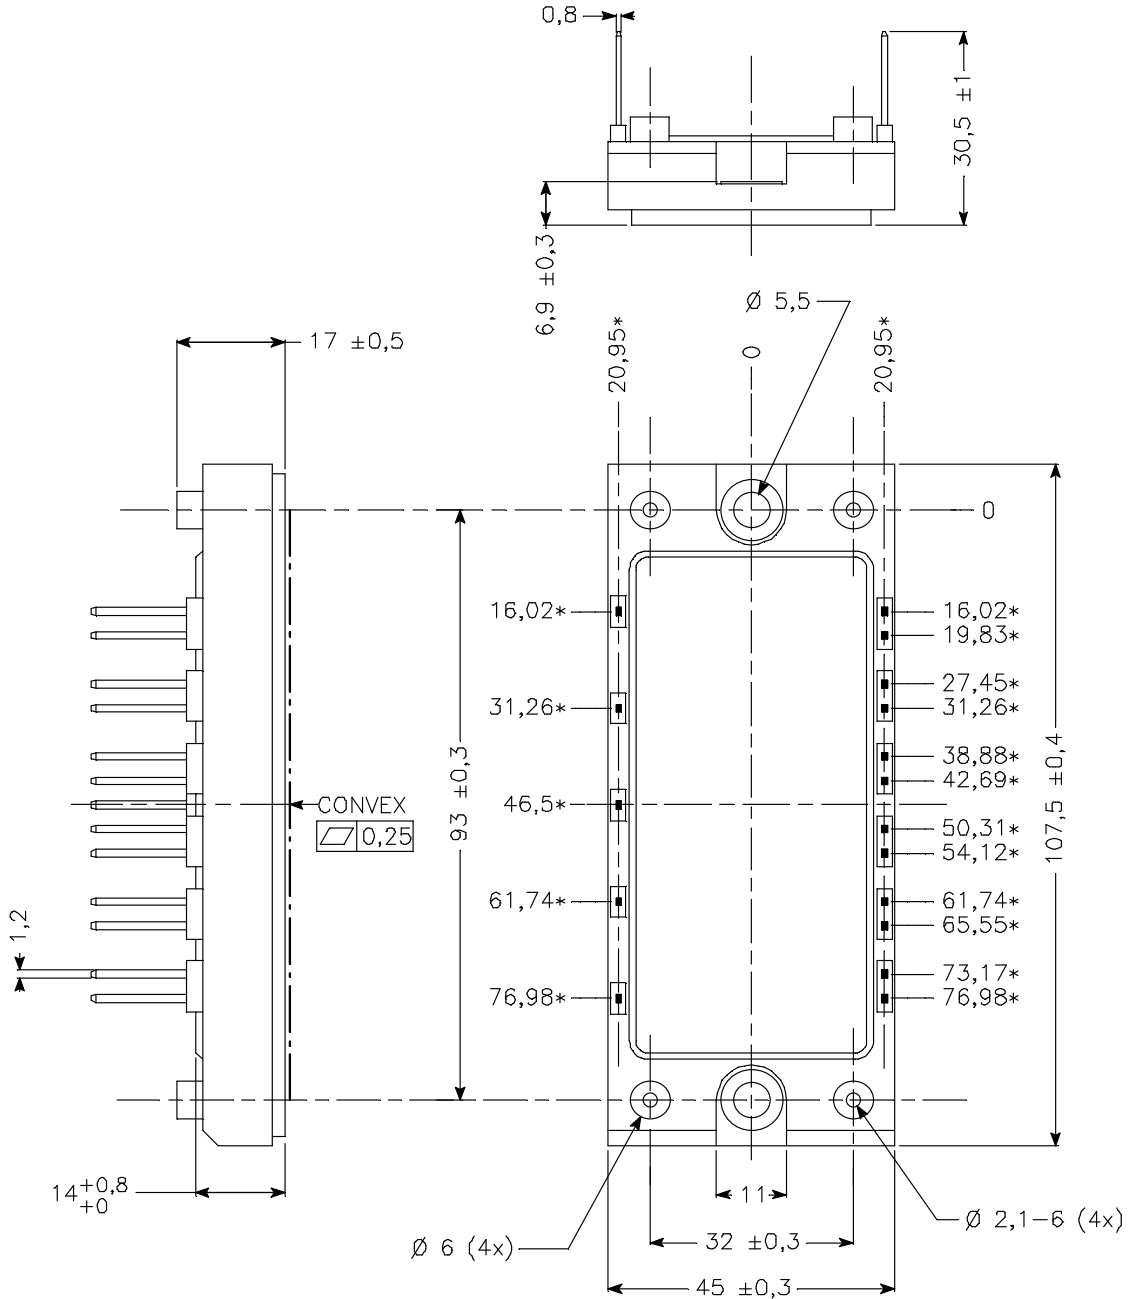

ALL DIMENSIONS MARKED "\*" ARE TOLERANCED AS :  $\oplus \varnothing 0,4$

**Package outline**

Pin out: APTGF10X120P2 (Short pins)

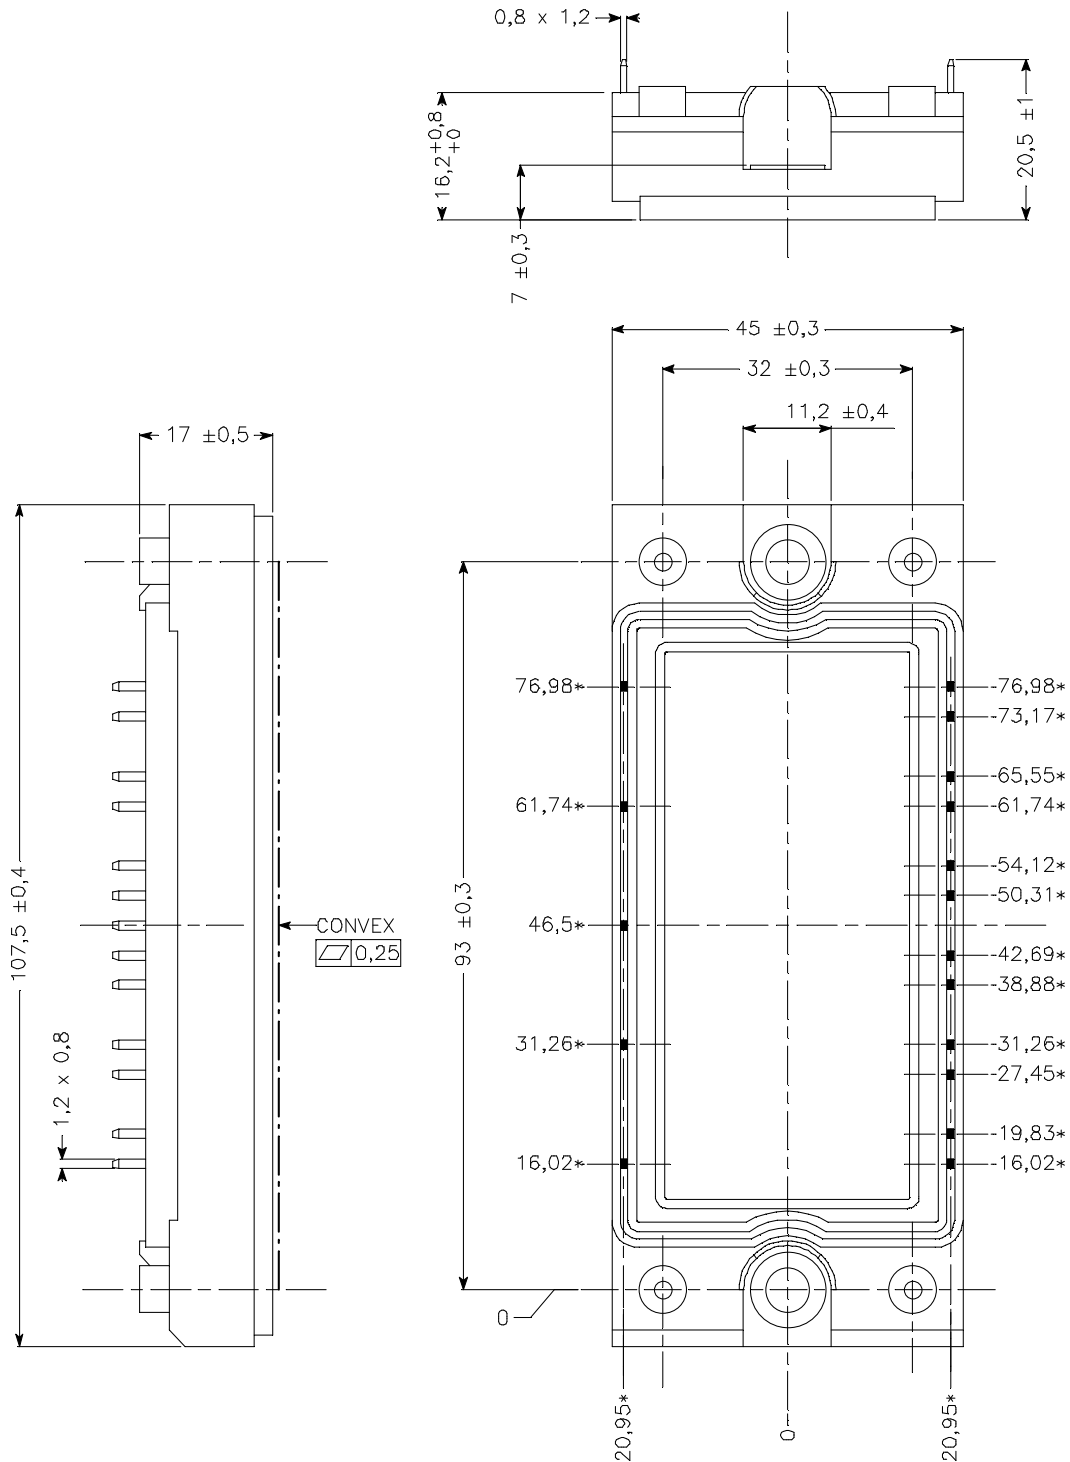

ALL DIMENSIONS MARKED "\*" ARE TOLERENCED AS :  $\pm 0,4$

**APT reserves the right to change, without notice, the specifications and information contained herein**

APT's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.