


# ZNREF100

## 10V LOW POWER PRECISION REFERENCE SOURCE

The ZNREF100 is a monolithic integrated circuit providing a precise stable reference voltage of 9.80V at 500 $\mu$ A.

The circuit features a knee current of 150 $\mu$ A and operation over a wide range of temperatures and currents.

The ZNREF100 is available in a 6-pin metal can package with pins 3 and 5 offering a trim facility whereby the output voltage can be adjusted as shown in Fig.1. This facility is used when compensating for system errors or setting the reference output to a particular value. When the trim facility is not used, pins 3 and 5 should be left open circuit.

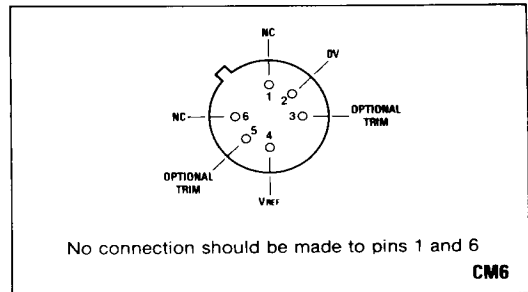

Pin connections (bottom view)

**CM6**

### FEATURES

- Trimmable Output
- Excellent Temperature Stability
- Low Output Noise Figure
- Available in Two Temperature Ranges
- 1 and 2% Initial Voltage Tolerance Versions Available
- No External Stabilising Capacitor required in most cases
- Low Slope Resistance

### ABSOLUTE MAXIMUM RATINGS

Reference current	50mA*
Power dissipation	500mW
Operating temperature range	See ordering information
Storage temperature range	-55°C to +175°C
Soldering temperature for a maximum time of 10s	
Within 1/16 in of the seating plane	300°C
Within 1/32 in of the seating plane	265°C

\* Above 25°C this figure should be linearly derated to 16mA at +125°C.

### ORDERING INFORMATION

Device type	Tol. (%)	Temperature Range
ZNREF100 A1	1	-55°C to +125°C
ZNREF100 C1	1	0°C to +70°C
ZNREF100 C2	2	0°C to +70°C

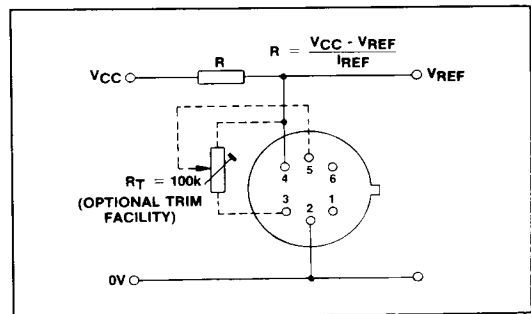


Fig.1 ZNREF100 application circuit

## TEMPERATURE DEPENDENT ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Initial voltage tolerance %	Grade A - 55 to 125°C		Grade C 0 to 70°C		Units
			Typ.	Max.	Typ.	Max.	
Output voltage change over relevant temperature range (See note (a))	$\Delta V_{REF}$	1 & 2	64	90	10.8	34.4	mV
Output voltage temperature coefficient (See note (b))	$TCV_{REF}$	1 & 2	35	50	15	50	ppm/°C

ELECTRICAL CHARACTERISTICS (at  $T_{amb} = 25^\circ\text{C}$  and pins 3 and 5 o/c unless otherwise noted).

Parameter	Symbol	Min.	Typ.	Max.	Units	Comments
Output voltage 1% tolerance (A1 C1) 2% tolerance (C2)	$V_{REF}$	9.70 9.60	9.80 9.80	9.90 10.00	V	$I_{REF} = 500\mu\text{A}$
Output voltage adjustment range	$\Delta V_{TRIM}$	-	$\pm 2.5$	-	%	$R_T = 100\text{k}\Omega$
Change in $TCV_{REF}$ with output adjustment	$TC\Delta V_{TRIM}$	-	0.8	-	ppm/°C/%	
Operating current range	$I_{REF}$	0.15	-	50	mA	See note (c)
Turn-on time Turn-off time	$t_{on}$ $t_{off}$	-	40 0.3	-	$\mu\text{s}$	$R_L = 1\text{k}\Omega$
Output voltage noise (over the range 0.1 to 10Hz)	$e_{n,p-p}$	-	50	-	$\mu\text{V}$	Peak to peak measurement
Slope resistance	$R_{REF}$	-	3	4	$\Omega$	$I_{REF}$ 0.5mA to 5mA, See note (d)

## NOTES

- (a) **Output change with temperature ( $\Delta V_{REF}$ )**  
The absolute maximum difference between the maximum output voltage and the minimum output voltage over the specified temperature range

$$\Delta V_{REF} = V_{max} - V_{min}$$

- (b) **Output temperature coefficient ( $TCV_{REF}$ )**  
The ratio of the output change with temperature to the specified temperature range expressed in ppm/°C.

$$TCV_{REF} = \frac{\Delta V_{REF} \times 10^6}{V_{REF} \times \Delta T} \text{ ppm/}^\circ\text{C}$$

$\Delta T$  = Full temperature change.

- (c) **Operating current ( $I_{REF}$ )**  
Maximum operating current must be derated as indicated in maximum ratings.

- (d) **Slope resistance ( $R_{REF}$ )**  
The slope resistance is defined as  $R_{REF} =$  change in  $V_{REF}$  overspecified current range  
 $\Delta I_{REF} = 5 - 0.5 = 4.5\text{mA}$  (typically)

- (e) **Line regulation**

The ratio of change in output voltage to the change in input voltage producing it.

$$\frac{R_{REF} \times 100}{V_{REF} \times R_S} \% / V \quad R_S = \text{Source resistance}$$

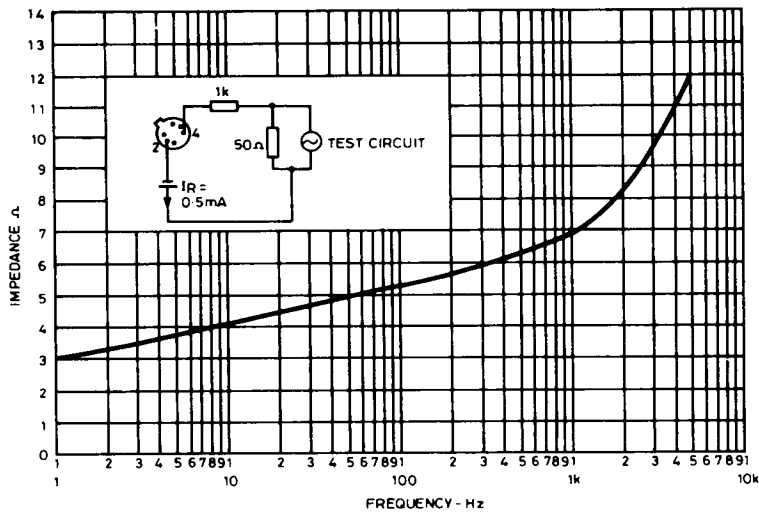


Fig.2 Dynamic impedance (typical)

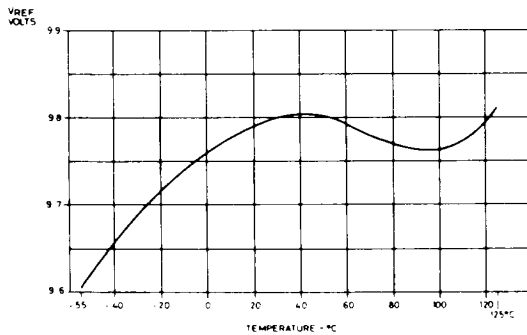


Fig.3 Typical temperature characteristics

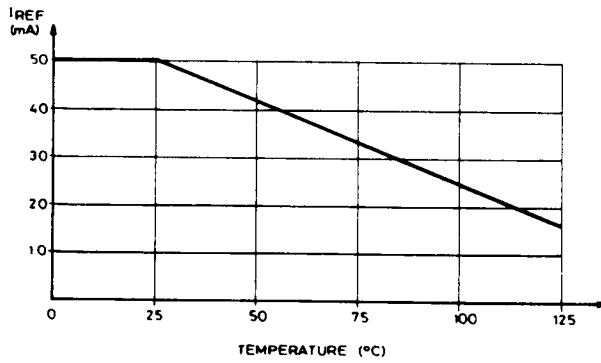


Fig.4  $I_{REF}$  derating for ZNREF100

7