Motor driven CS08供应商

山贞

Reversible motor driver BA6208 / BA6208F

The BA6208 and BA6208F are monolithic ICs used for driving reversible motors. They allow control of reversible motors in cassette players and other electrical equipment by using TTL-level logic signals.

The ICs contain a logic section, which controls forward and reverse rotations as well as forced stop, and an output power section, which can supply an output current of up to 100mA (typical) according to the logic control.

Features

- Motor driving power transistors are built in (100mA typically).
- 2) Brake is applied when stopping the motor (when inputs A and B are both HIGH level).
- 3) Built-in diode to absorb surge currents.

- Very low standby circuit current when inputs A and B are both LOW level.
- 5) Wide range of operating supply voltage (4.5 \sim 15.0V).
- 6) Direct control with the TTL logic.

Parameter		Symbol	Limits	Unit 🥢	
Power supply voltage		Vcc	18	V	
Power dissipation	BA6208	Pd	700*1	mW	
	BA6208F	Pd	450* ²		
Operating temperature		Topr	-20~+60	ĉ	
Storage temperature		Tstg	-55~+125	°C	
Maximum output current		Ιουτ	500	mA	

•Absolute maximum ratings (Ta = 25° C)

*1 Reduced by 7 mW for each increase in Ta of 1°C over 25°C.

*2 Reduced by 4.5 mW for each increase in Ta of 1 $^\circ C$ over 25 $^\circ C.$

•Recommended operating conditions (Ta = 25° C)

Parameter	Symbol	Symbol Min.		Max.	Unit
Power supply voltage	Vcc	4.5	-	15	V

Input truth table

_						
3pin <mark>(Ain)</mark>		2pin (Bin)	8pin (Aout)	7pin (Bout)		
	н	9 -	н	L		
	ь н		L	Н		
	нн		L	L		
2 _ L		L	OPEN	OPEN		

Note: HIGH level input is 2.0 V or more.

BA6208 / BA6208F


Motor driver ICs

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Output current	lo	200	-	—	mA	
Output saturation voltage	Vce	—	-	1.6	V	lo=100mA
Input high level voltage	Vін	2.0	-	—	V	
Input low level voltage	V⊫	—	-	0.8	V	
Standby supply current	lsт	_	-	0.4	mA	When inputs A and B are both LOW level
Input high level current	Ін	_	_	400	μA	VIH=4.5V

•Electrical characteristics (unless otherwise noted, $Ta = 25^{\circ}C$ and $V_{CC} = 9V$)

A diode that absorbs at least 500 mA is built in to give protection against surge currents with a pulse width of 10 ms and a duty ratio of 10% or less.

Internal circuit configuration

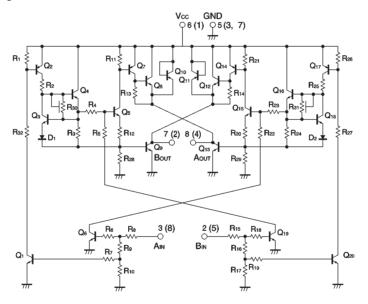

Note : Figures in parentheses are for the BA6208F

Fig.1



