2SD2211 / 2SD1918 / 2SD1857A

Transistors

Power Transistor (160V, 1.5A) 2SD2211 / 2SD1918 / 2SD1857A

Features

- 1) High breakdown voltage.(BVcEo = 160V)
- 2) Low collector output capacitance. (Typ. 20pF at $V_{CB} = 10V$)
- 3) High transition frequency. ($f_T = 80MHz$)
- 4) Complements the 2SB1275 / 2SB1236A.


● Absolute maximum ratings (Ta = 25°C)

Parameter		Symbol	Limits	Unit		
Collector-base voltage		Vсво	160	V		
Collector-emitter voltage		Vceo	160	V		
Emitter-base voltage		VEBO	5	V		
Collector current		lc	1.5	A(DC)		
		IC	3	A(Pulse) *1		
Collector power dissipation	2SD1857A		1	W *2		
	2SD2211	Pc	0.5	W		
			2	W *3		
	2SD1918		1	W		
		- Y	10	W(Tc=25°C)		
Junction temperature		Tj	150	°C		
Storage temperature		Tstg	-55+150	°C		

- Packaging specifications and hFE

Type	2SD2211	2SD1918	2SD1857A
Package	MPT3	CPT3	ATV
hfE	QR	QR	PQ
Marking	DQ*	L Land	1
Code	T100	TL	TV2
Basic ordering unit (pieces)	1000	2500	2500

●External dimensions (Unit: mm)

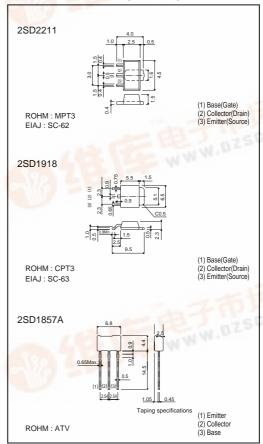

●Electrical characteristics (Ta = 25°C)


Parameter		Symbol	Min.	Тур.	Max.	Unit	Conditions
Collector-base breakdown voltage		ВУсво	160	-	-	V	Ic=50μA
Collector-emitter breakdown voltage		BVcEo	160	-	- 1	V	Ic=1mA
Emitter-base breakdown voltage		ВУево	5	-	-	V	Ιε = 50μΑ
Collector cutoff current		Ісво		1	1	μА	VcB = 120V
Emitter cutoff current		ІЕВО		C 8 H	1	μА	V _{EB} = 4V
Collector-emitter saturation voltage		VCE(sat)	190	-	2	V	Ic/I _B = 1A/0.1A *
Base-emitter saturation voltage		V _{BE} (sat)	-	-	1.5	V	Ic/I _B = 1A/0.1A *
DC current transfer ratio	2SD2211,2SD1918	hre	120	-	390	-	Vce/lc = 5V/0.1A
	2SD1857A		82	-	270	-	
Transition frequency		fr	-	80	-	MHz	Vce = 5V , Ie = -0.1A , f = 30MHz
Output capacitance		Cob	-	20	-	pF	VcB = 10V , IE = 0A , f = 1MHz

^{*} Measured using pulse current



Rev.A

•Electrical characteristic curves



COLLECTOR TO EMITTER VOLTAGE : V_{CE} (V) Fig.1 Ground emitter output characteristics




Fig.2 Ground emitter propagation characteristics




Fig.3 DC current gain vs. collector current (I)




Fig.4 DC current gain vs. collector current (II)




Fig.5 Collector-emitter saturation voltage vs. collector current




Fig.6 Collector-emitter saturation voltage Base-emitter saturation voltage vs. collector current




Fig.7 Gain bandwidth products vs. emitter current





Fig.8 Collector output capacitance vs. collector-base voltage



COLLECTOR TO EMITTER VOLTAGE : V_{CE} (V) Fig.9 Safe operating area (2SD2211)




Fig.10 Safe operating area (2SD1918)

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
 use and operation. Please pay careful attention to the peripheral conditions when designing circuits
 and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

