

SANYO	No.1403A	2SK404
		N-Channel Junction Silicon FET
HF Amp, AF Amp Applications		

Features

- Large $|y_{fs}|$
- Low noise
- Small C_{rss}

Absolute Maximum Ratings/ $T_a = 25^\circ\text{C}$

			unit
Drain to source voltage	V_{DSS}	20	V
Gate to drain voltage	V_{GSS}	-20	V
Gate current	I_G	10	mA
Drain current	I_D	20	mA
Allowable power dissipation	P_D	200	mW
Junction temperature	T_j	125	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +125	$^\circ\text{C}$


Electrical Characteristics/ $T_a = 25^\circ\text{C}$

			min	typ	max	unit
Gate to drain breakdown voltage	$V(BR)_{GSS}$	$I_G = -10\mu\text{A}$	-20			V
Common source gate cutoff current	I_{GSS}	$V_{GS} = -10\text{V}, V_{DS} = 0\text{V}$			-1.0	nA
Gate to source cutoff voltage	$V_{GS}(\text{off})$	$V_{DS} = 5\text{V}, I_D = 10\mu\text{A}$		-0.8	-2.0	V
Drain current	I_{DSS}	$V_{DS} = 5\text{V}, V_{GS} = 0\text{V}$	1.2*		12.0*	mA
Forward transfer admittance	$ Y_{fs} $	$V_{DS} = 5\text{V}, V_{GS} = 0\text{V}, f = 1\text{kHz}$	5.0	10		mS
Input capacitance	C_{iss}	$V_{DS} = 5\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$		7.0		pF
Reverse transfer capacitance	C_{rss}	$V_{DS} = 5\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$		1.8		pF
Noise figure	NF	$V_{DS} = 5\text{V}, I_D = 1\text{mA}, R_g = 1\text{k}\Omega, f = 1\text{kHz}$		1.5		dB

*: The 2SK404 is classified by $V_{DS} = 5\text{V}$ as follows (unit: mA):









1.2	D	3.0	2.5	E	6.0	5.0	F	12.0
-----	---	-----	-----	---	-----	-----	---	------




Package Dimensions 2034
(unit: mm)

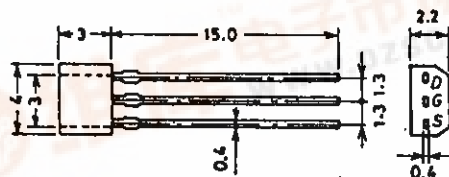

D: Drain
G: Gate
S: Source
SANYO: SPA



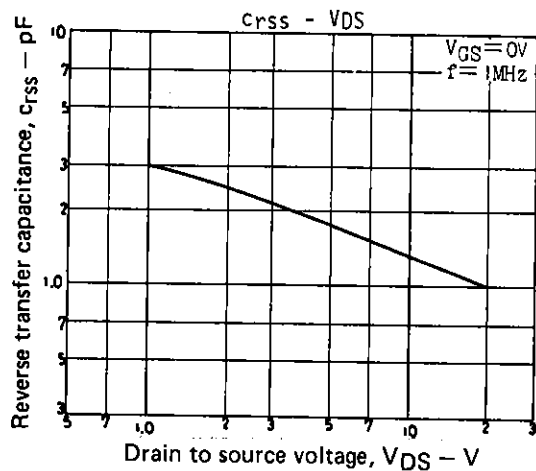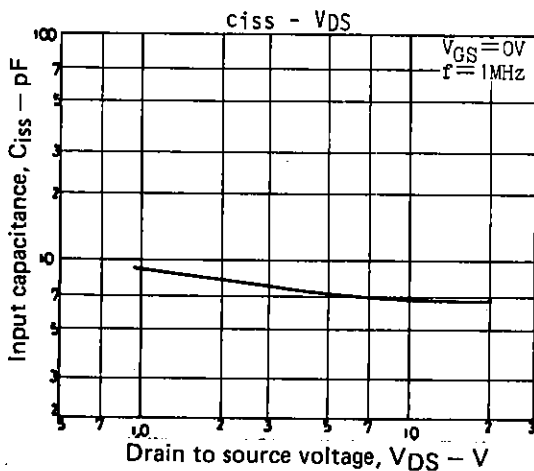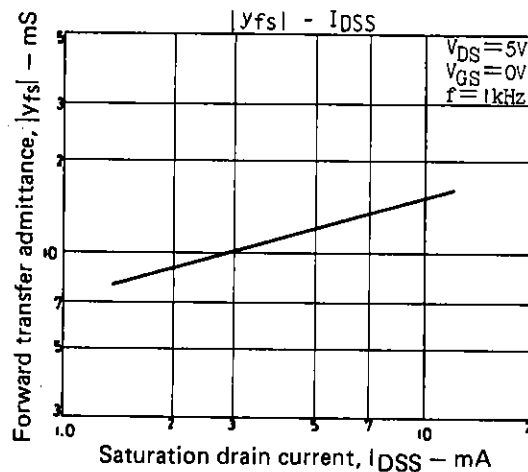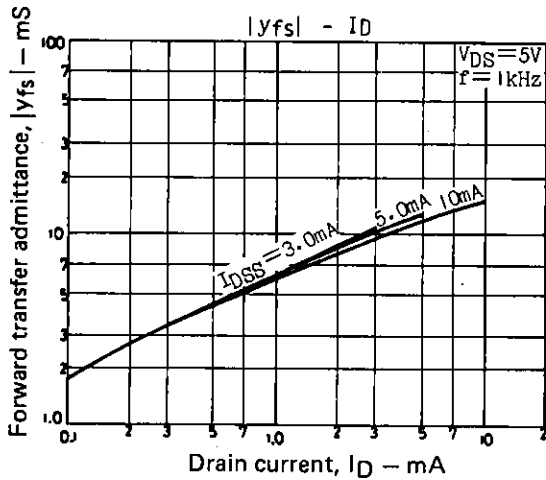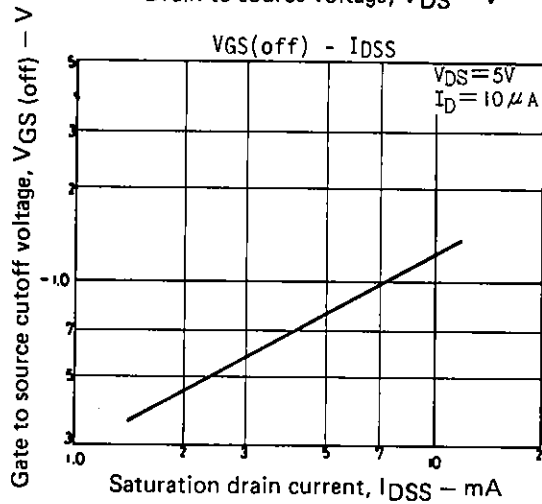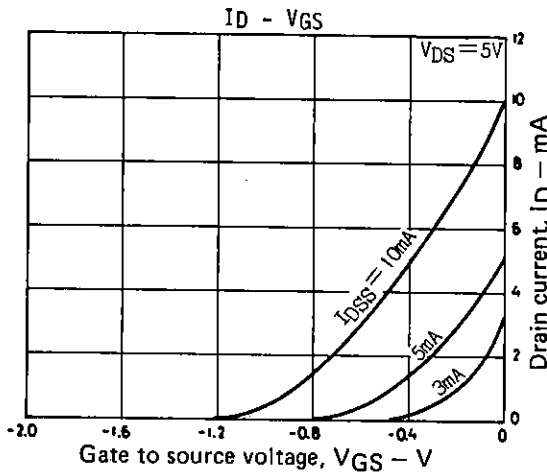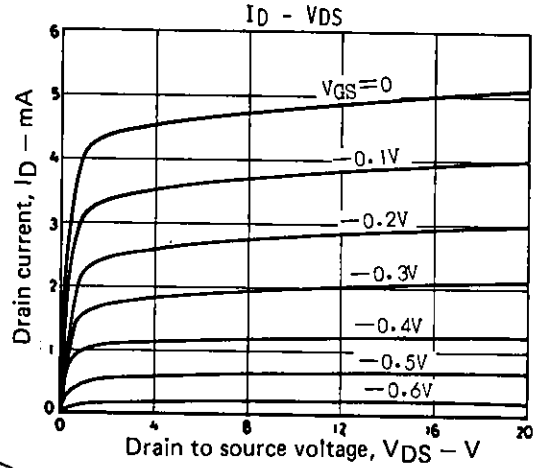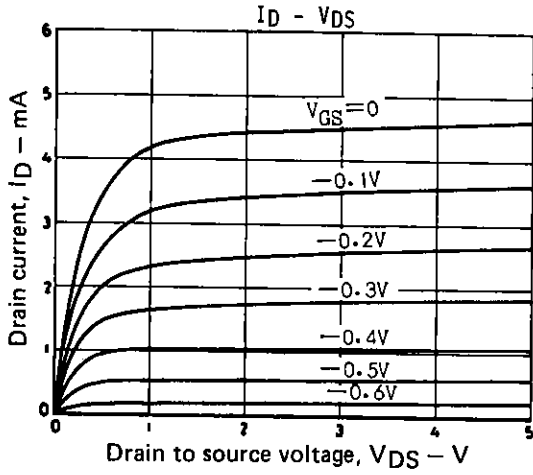

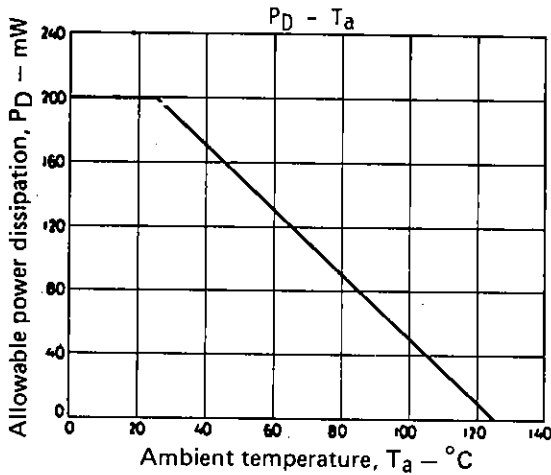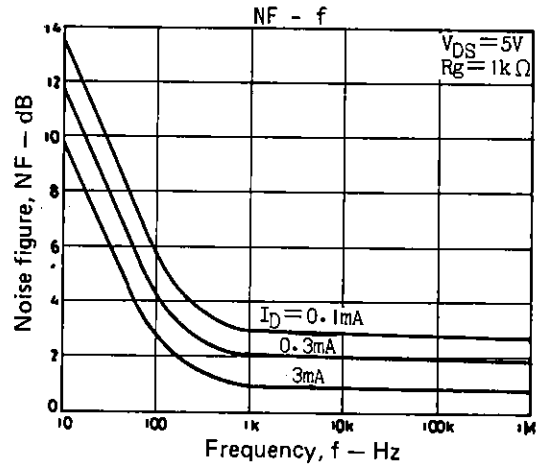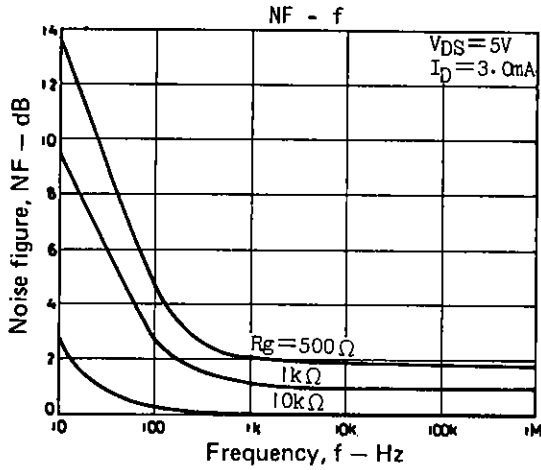

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.