

25C D ■ 8235605 0004854 1 ■ SIEG

T-33-29

NPN Silicon Darlington Power Transistor

BUX 28



SIEMENS AKTIENGESELLSCHAFT

Not for new design


BUX 28 is a triple diffused monolithic NPN darlington power transistor in TO 3 case (3 A 2 DIN 41872). The collector is electrically connected to the case. The resistor between base and emitter as well as the inverting diode are integrated.

BUX 28 is particularly suitable for use in firing circuits of cars and for general purpose switching applications at high voltages.


Type	Ordering code
BUX 28	Q62702-U258
Mica washer	Q62901-B11-A
Insulating nipple	Q62901-B50

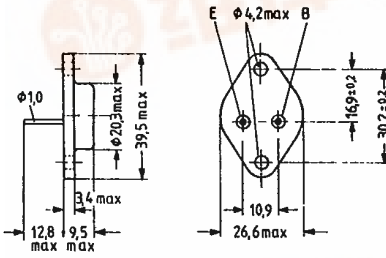

Approx. weight 18 g
Dimensions in mm



Mica washer dry: $R_{th} = 1.25 \text{ K/W}$
greased: $R_{th} = 0.35 \text{ K/W}$



Insulating nipple

Maximum ratings

Collector-emitter voltage	V_{CE0}	350	V
Collector-emitter voltage	V_{CER}	350	V
Collector current	I_C	8	A
Collector peak current ($t_p < 1 \text{ ms}$)	I_{CM}	12	A
Current of the inverse diode	$-I_C$	8	A
Base current	I_B	1.5	A
Junction temperature	T_j	175	°C
Total power dissipation ($T_{case} \leq 55 \text{ °C}$)	P_{tot}	80	W

Thermal resistance

Junction to case	R_{thJC}	< 1.2	K/W
------------------	------------	-------	-----

900

2216

D-13



Static characteristics ($T_{case} = 25^\circ\text{C}$)

Collector-emitter breakdown voltage
 ($I_C = 100\text{ mA}; L = 25\text{ mH}$)
 Collector cutoff current
 Collector cutoff current
 ($V_{CE} = 350\text{ V}$)
 ($V_{CE} = 350\text{ V}, T_{case} = 125^\circ\text{C}; t_p < 200\ \mu\text{s}$)
 DC current gain
 ($I_C = 7\text{ A}; V_{CE} = 1.5\text{ V}$)
 Collector-emitter saturation voltage
 ($I_C = 10\text{ A}; I_B = 0.25\text{ A}$)
 Base-emitter saturation voltage
 ($I_C = 10\text{ A}; I_B = 0.25\text{ A}$)
 Forward voltage of the inverse diode
 ($-I_C = 7\text{ A}; I_B = 0$)

$V_{(BR)CEO}$	> 350	V^*
I_{CEO}	< 1	mA
I_{CEO}	< 1	mA
I_{CES}	< 10	mA
h_{FE}	> 10	-
V_{CEsat}	< 2	V^*
V_{BEsat}	< 2.4	V^*
$-V_{CE}$	1.5	V

* AQL = 0.65%

