

**MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA**

**High Voltage, Internally
Compensated Operational
Amplifier**

The MC1436, C was designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

- Maximum Supply Voltage: ± 40 Vdc (MC1536)
- Output Voltage Swing:
 ± 30 Vpk(min) ($V_{CC} = +36$ V, $V_{EE} = -36$ V) (MC1536)
 ± 22 Vpk(min) ($V_{CC} = +28$ V, $V_{EE} = -28$ V)
- Input Bias Current: 20 nA max (MC1536)
- Input Offset Current: 3.0 nA max (MC1536)
- Fast Slew Rate: 2.0 V/ μ s typ
- Internally Compensated
- Offset Voltage Null Capability
- Input Overvoltage Protection
- A_{VOL} : 500,000 typ
- Characteristics Independent of Power Supply Voltages:
 $(\pm 5.0$ Vdc to ± 36 Vdc)

**Figure 1. Differential Amplifier with ± 20 V
Common Mode Input Voltage Range**


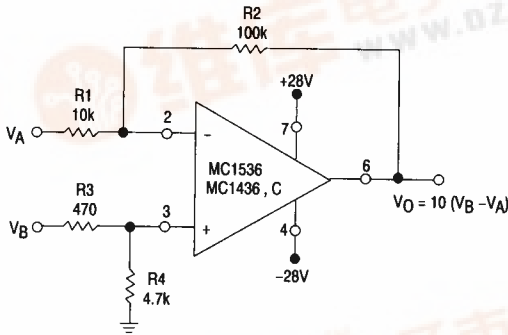


Figure 2. Typical Noninverting X10 Voltage Amplifier

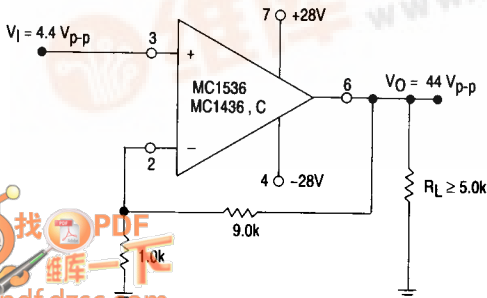

急出货

**MC1436,C
MC1536**

2

OPERATIONAL AMPLIFIER

**SILICON MONOLITHIC
INTEGRATED CIRCUIT**



**P1 SUFFIX
PLASTIC PACKAGE
CASE 626**




**U SUFFIX
CERAMIC PACKAGE
CASE 693**



**D SUFFIX
PLASTIC PACKAGE
CASE 751
(SO-8)**

PIN CONNECTIONS



ORDERING INFORMATION

Device	Temperature Range	Package
MC1436CD,D		SO-8
MC1436P1,CPT1	0° to +70°C	Plastic DIP
MC1436CU,U		Ceramic DIP
MC1536U	-55° to +125°C	Ceramic DIP



MC1436,C, MC1536

Figure 3. Low-Drift Sample and Hold

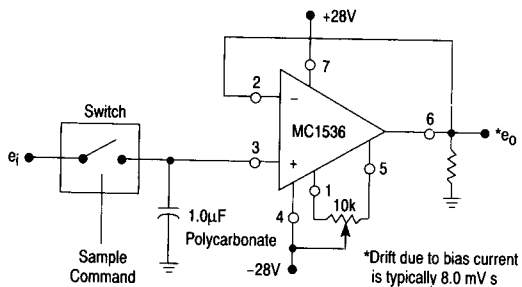


Figure 4. Power Bandwidth

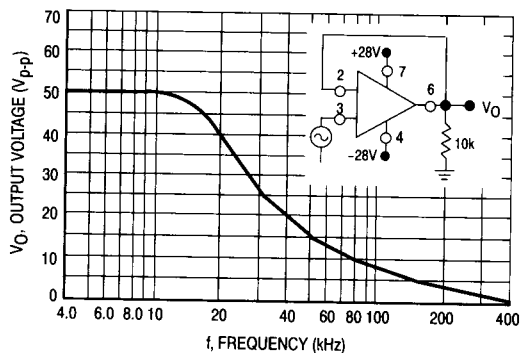


Figure 5. Peak Output Voltage Swing versus Power Supply Voltage

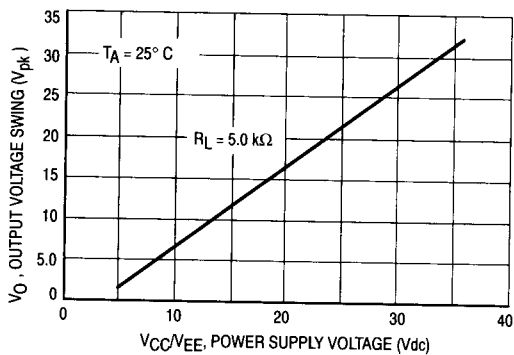


Figure 6. Open-Loop Frequency Response

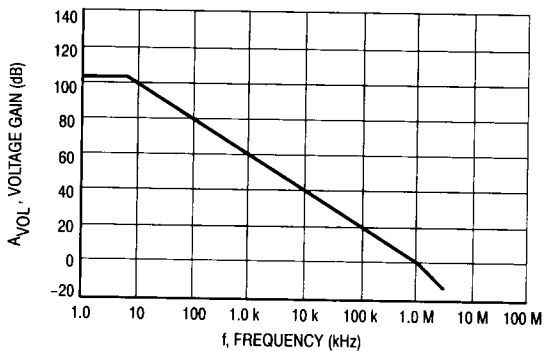


Figure 7. Output Short Circuit Current versus Temperature


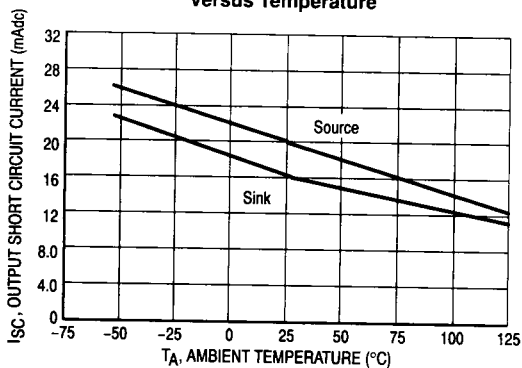


Figure 8. Input Bias Current versus Temperature

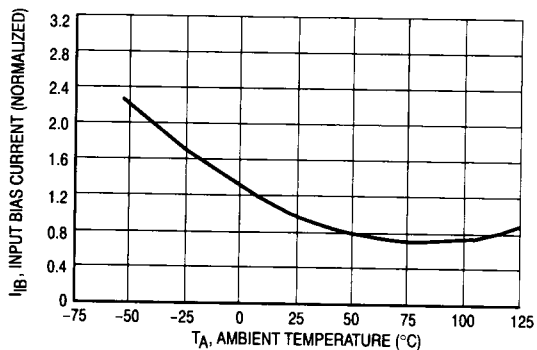

MC1436,C, MC1536

Figure 9. Inverting Feedback Model

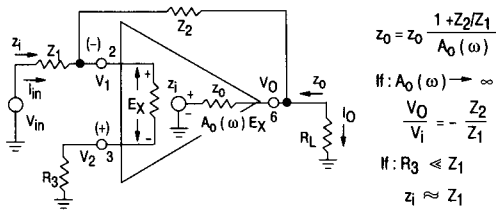


Figure 10. Noninverting Feedback Model

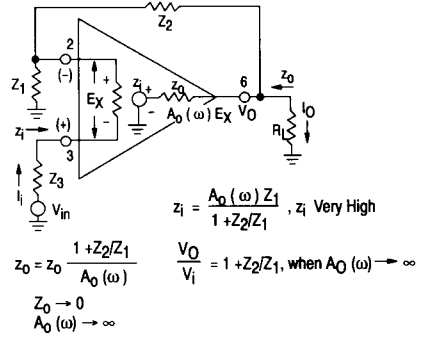


Figure 11. Audio Amplifier

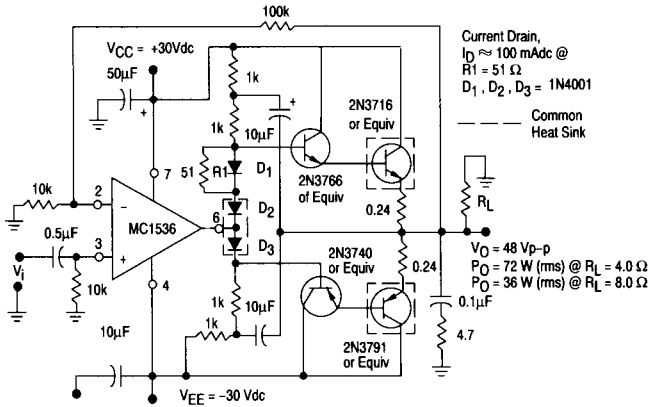


Figure 13. Representative Circuit Schematic

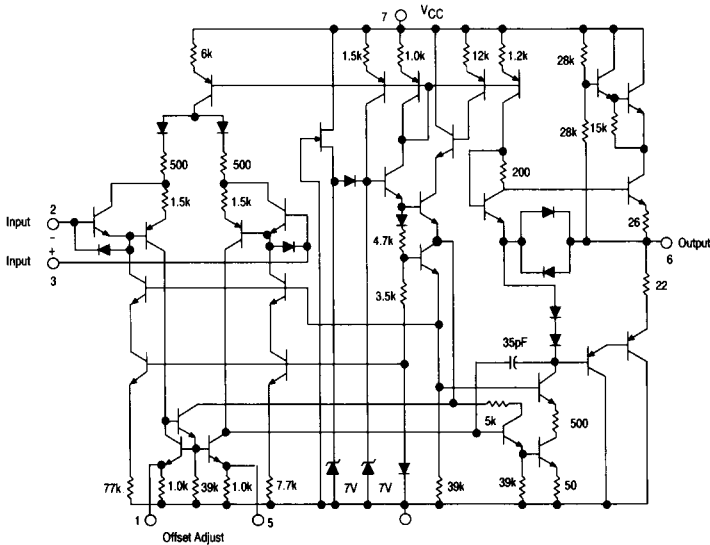


Figure 12. Voltage Controlled Current Source or Transconductance Amplifier with 0 V to 40 V Compliance

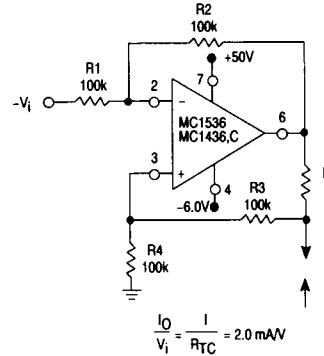


Figure 14. Equivalent Circuit

