

## PT6400 Series

3 Amp 5V Input Adjustable  
Integrated Switching Regulator

**Power Trends Products**  
from Texas Instruments

**SLTS032A**

(Revised 6/30/2000)


- Single-Device 5V to 3V Power
- 85% Efficiency
- Small SIP Footprint
- Adjustable Output Voltage

The PT6400 is a high performance +5V to +3.3V, 3 Amp, 12-Pin SIP (Single In-line Package) Integrated Switching Regulator (ISR) designed for stand alone (not parallelable) operation. This high-performance ISR

allows easy integration of low-power 3.3V logic IC's into existing 5V systems without redesigning the central power supply. Only two external capacitors are required for proper operation. The output voltage is easily adjustable with one external resistor. The PT6406,7,8 can be used to terminate high-speed data buses such as Futurebus (+2.1V) or the new GTL (+1.2V) logic buses.

Please note that this product does not include short circuit protection.

### Standard Application

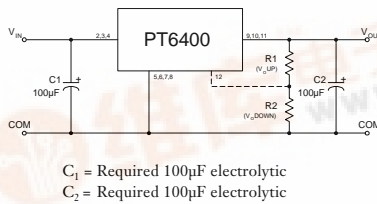

### Pin-Out Information


Pin	Function
1	Do not connect
2	$V_{in}$
3	$V_{in}$
4	$V_{in}$
5	GND
6	GND
7	GND
8	GND
9	$V_{out}$
10	$V_{out}$
11	$V_{out}$
12	$V_{out}$ Adjust

### Ordering Information

PT6404	= +1.5 Volts
PT6405	= +3.3 Volts
PT6406	= +1.8 Volts
PT6407	= +2.1 Volts
PT6408	= +1.2 Volts
PT6409	= +2.5 Volts

### PT Series Suffix (PT1234X)

Case/Pin Configuration	
Vertical Through-Hole	<b>P</b>
Horizontal Through-Hole	<b>D</b>
Horizontal Surface Mount	<b>E</b>



Note: Back surface of product is conducting metal.

### Specifications

Characteristics ( $T_a = 25^\circ\text{C}$ unless noted)	Symbols	Conditions	PT6400 SERIES			
			Min	Typ	Max	Units
Output Current	$I_o$	$4.5\text{V} \leq V_{in} \leq 5.5\text{V}$	0.1*	—	3.0	A
Current Limit	$I_{cl}$	$V_{in} = +5\text{V}$	—	3.6	5.0	A
Input Voltage Range	$V_{in}$	$0.1\text{A} \leq I_o \leq 3.0\text{A}$	4.5	—	5.5	V
Output Voltage Tolerance	$\Delta V_o$	$V_{in} = +5\text{V}$ , $I_o = 3.0\text{A}$ $0^\circ\text{C} \leq T_a \leq +70^\circ\text{C}$	$V_o - 0.05$	—	$V_o + 0.05$	V
Line Regulation	$\text{Reg}_{line}$	$4.5\text{V} \leq V_{in} \leq 5.5\text{V}$ , $I_o = 3.0\text{A}$	—	$\pm 10$	$\pm 25$	mV
Load Regulation	$\text{Reg}_{load}$	$V_{in} = +5\text{V}$ , $0.3 \leq I_o \leq 3.0\text{A}$	—	$\pm 10$	$\pm 25$	mV
$V_o$ Ripple/Noise	$V_n$	$V_{in} = 5\text{V}$ , $I_o = 3.0\text{A}$	—	66	165	mV
Transient Response with $C_2 = 100\mu\text{F}$	$t_{tr}$ $V_{os}$	$I_o$ step between 1.5A and 3.0A $V_o$ over/undershoot	— —	200 200	—	$\mu\text{Sec}$ mV
Efficiency	$\eta$	$V_{in} = +5\text{V}$ , $I_o = 1.5\text{A}$ $V_o = 3.3\text{V}$ $V_o = 1.8\text{V}$ $V_o = 2.1\text{V}$ $V_o = 1.2\text{V}$	— — — —	85 74 77 63	— — — —	% % % %
Switching Frequency	$f_o$	$4.5\text{V} \leq V_{in} \leq 5.5\text{V}$ $0.3\text{A} \leq I_o \leq 3.0\text{A}$	500	650	800	kHz
Absolute Maximum Operating Temperature Range	$T_a$		0	—	+85	$^\circ\text{C}$
Recommended Operating Temperature Range	$T_a$	Free Air Convection (40-60 LFM) At $V_{in} = 5\text{V}$ , $I_o = 2.5\text{A}$	0	—	+70**	$^\circ\text{C}$
Thermal Resistance	$\theta_{ja}$	Free Air Convection (40-60 LFM)	—	25	—	$^\circ\text{C}/\text{W}$
Storage Temperature	$T_s$		-40	—	+125	$^\circ\text{C}$
Mechanical Shock		Per Mil-STD-883D, Method 2002.3, 1 msec, Half Sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC board	—	15	—	G's
Weight			—	6.5	—	grams

\*ISR will operate down to no load with reduced specifications

\*\*See Thermal Derating chart.

Note: The PT6400 Series requires two 100µF electrolytic or tantalum capacitors for proper operation in all applications.







## PT6400 Series





## Typical Characteristics

3 Amp 5V Input Adjustable  
Integrated Switching Regulator





**PT6408, 1.2 VDC** (See Note 1)

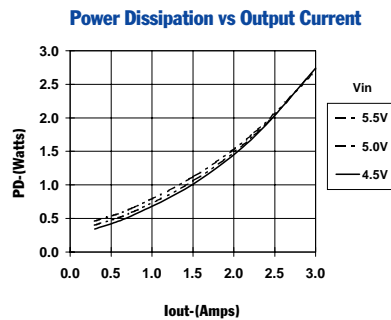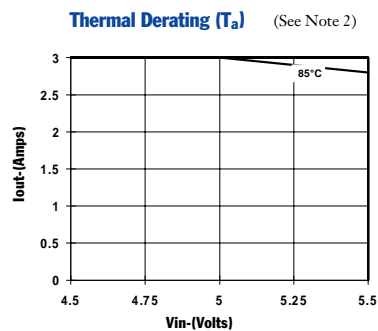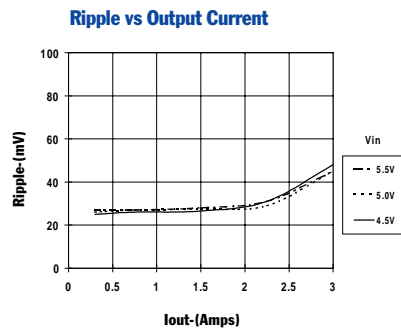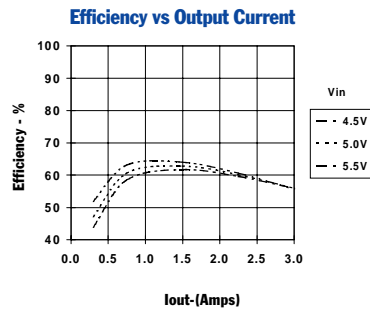

**PT6407, 2.1 VDC** (See Note 1)

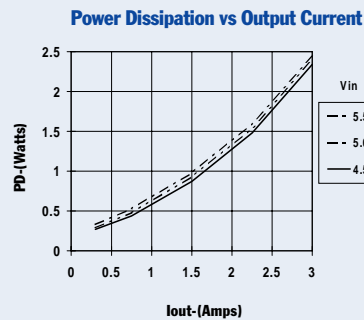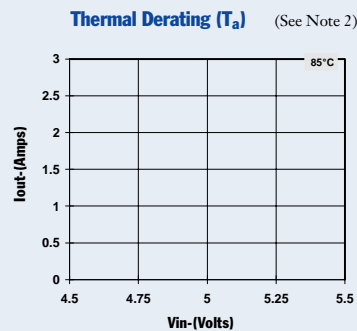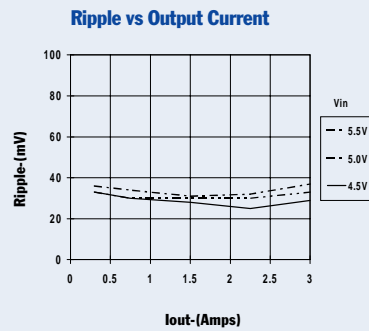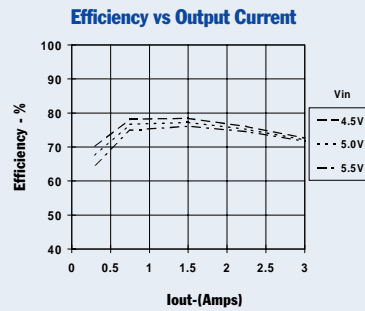

**PT6405, 3.3 VDC** (See Note 1)

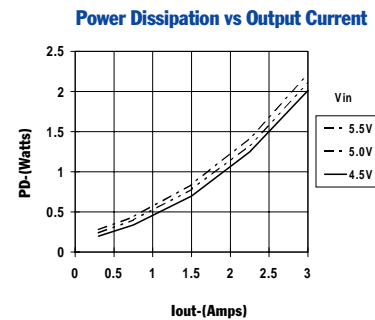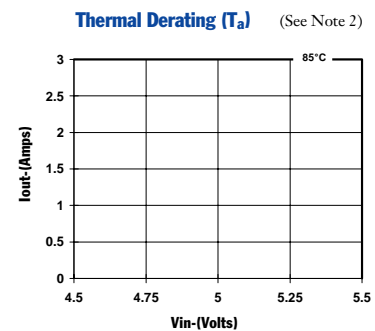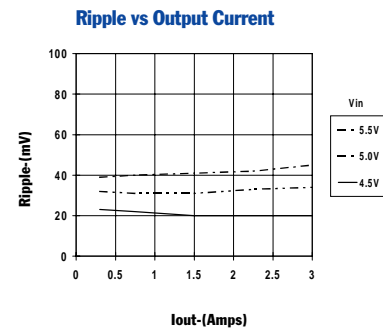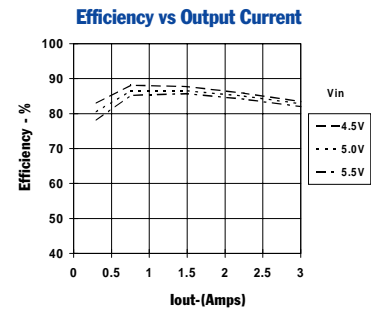

**Note 1:** All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

**Note 2:** Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)

## PT6400 Series

### Adjusting the Output Voltage of the PT6400 Series 3AMP 5V Bus Converters

The output voltage of the Power Trends PT6400 Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model in the series as  $V_a$  (min) and  $V_a$  (max).

**Adjust Up:** (See note 1) An increase in the output voltage is obtained by adding a resistor R1, between pin 12 ( $V_o$  adjust) and pins 9-11 ( $V_{out}$ ).


**Adjust Down:** (See note 1) Add a resistor (R2), between pin 12 ( $V_o$  adjust) and pins 5-8 (GND).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor; either R1 or (R2) as appropriate.

#### Notes:

1. The direction in which each resistor adjusts the output of the PT6400 series differs from many other Power Trends products. These output voltage adjustment notes are therefore specific only to the PT6400 models.
2. Use only a single 1% resistor in either the R1 or (R2) location. Place the resistor as close to the ISR as possible.
3. Never connect capacitors from  $V_o$  adjust to either GND or  $V_{out}$ . Any capacitance added to the  $V_o$  adjust pin will affect the stability of the ISR.
4. An increase in the output voltage may place additional limits on the input voltage range of the part. The revised minimum input voltage will be ( $V_{out} + 1.2$ ) or 4.5V, whichever is higher. Do not exceed 5.5Vdc.

**Figure 1**

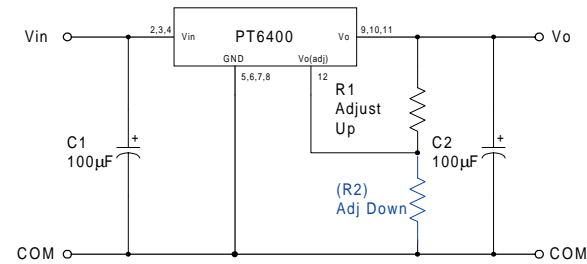

The values of R1 [adjust up], and (R2) [adjust down], can also be calculated using the following formulae.

$$R1 = \frac{12.45 V_o}{(V_a - V_o)} - 49.9 \quad k\Omega$$

$$(R2) = \frac{12.45 (2V_a - V_o)}{V_o - V_a} - 49.9 \quad k\Omega$$

Where:  $V_o$  = Original output voltage  
 $V_a$  = Adjusted output voltage

**Table 1**

#### PT6400 ADJUSTMENT RANGE

Series Pt #	PT6408	PT6404	PT6406	PT6407	PT6409	PT6405
$V_o$ (nom)	1.2	1.5	1.8	2.1	2.5	3.3
$V_a$ (min)	1.1	1.3	1.5	1.8	2.1	2.8
$V_a$ (max)	1.4	1.8	2.2	2.6	3.1	3.8

## Application Notes *continued*

### PT6400 Series

**Table 2**

**PT6400 ADJUSTMENT RESISTOR VALUES**

Series Pt #	PT6408	PT6404	PT6406	PT6407	PT6409	PT6405
V <sub>o</sub> (nom)	1.2	1.5	1.8	2.1	2.5	3.3
V <sub>a</sub> (req'd)						
1.1	(74.6)kΩ					
1.15	(224.0)kΩ					
1.2						
1.25	249.0kΩ					
1.3	99.5kΩ	(18.6)kΩ				
1.35	49.7kΩ	(49.7)kΩ				
1.4	24.8kΩ	(112.0)kΩ				
1.45		(299.0)kΩ				
1.5			(0.0)kΩ			
1.55		324.0kΩ	(14.8)kΩ			
1.6		137.0kΩ	(37.3)kΩ			
1.65		74.6kΩ	(74.6)kΩ			
1.7		43.5kΩ	(149.0)kΩ			
1.75		24.8kΩ	(373.0)kΩ			
1.8		12.4kΩ		(12.4)kΩ		
1.85			398.0kΩ	(29.8)kΩ		
1.9			174.0kΩ	(55.9)kΩ		
1.95			99.5kΩ	(99.5)kΩ		
2.0			62.2kΩ	(187.0)kΩ		
2.05			39.7kΩ	(448.0)kΩ		
2.1			24.8kΩ		(3.0)kΩ	
2.15			14.1kΩ	473.0kΩ	(14.1)kΩ	
2.2		6.1kΩ		212.0kΩ	(29.0)kΩ	
2.25				124.0kΩ	(49.7)kΩ	
2.3				80.8kΩ	(80.8)kΩ	
2.35				54.7kΩ	(133.0)kΩ	
2.4				37.3kΩ	(236.0)kΩ	
2.45				24.8kΩ	(548.0)kΩ	
2.5				15.5kΩ		
2.55				8.2kΩ	573.0kΩ	
2.6				2.4kΩ	261.0kΩ	
2.65					158.0kΩ	
2.7					106.0kΩ	
2.75					74.6kΩ	
2.8					53.9kΩ	(7.4)kΩ
2.85					39.0kΩ	(16.5)kΩ
2.9					27.9kΩ	(27.9)kΩ
2.95					19.3kΩ	(42.6)kΩ
3.0					12.4kΩ	(62.2)kΩ
3.1					2.0kΩ	(131.0)kΩ
3.2						(336.0)kΩ
3.3						
3.4						361.0kΩ
3.5						156.0kΩ
3.6						87.0kΩ
3.7						52.8kΩ
3.8						32.3kΩ

R1 = Black    R2 = (Blue)

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.