

Audio ICs查询BA3577FS供应商

Low power consumption headphone driver for digital audio **BA3577FS**

The BA3577FS is a headphone driver developed for portable digital audio equipment that supports a voltage of 1.5V.

Applications

Portable MD players and others

Features

- 1) 1.5V supported.
- 2) Low current consumption (At Po = 0.5mW / ch, Vcc inflow current = 3.3mA, and + B inflow current = 6.8mA (Typ.)).
- 4) Internal muting switch.
- 5) Internal ripple filter.
- 6) Internal BEEP circuit
- 3) Output coupling capacitor of 100µF produces fc = 45Hz (R_L = 16Ω).


$45HZ (KL = 16\Omega).$										
●Absolute maximum ra	tings (Ta = 25°)									
Parameter	Symbol	Limits	Unit							
Power supply voltage	Vcc	4.0	V							
Power supply vollage	+в	9.0	V							
Power dissipation	Pd	600*1	mW							
Operating temperature	Topr	-15~+60	Ĉ							
Storage temperature	Tstg	-55~+125	Ĵ							

*1 Reduced by 6.5mW for each increase in Ta of 1°C over 25°C

•Recommended operating conditions (Ta = 25°C)											
Parameter	Symbol	Min.	Тур.	Max.	Unit						
Power supply voltage	Vcc	2.2	2.8	3.6	V						
Fower suppry voltage	+в	0.8	1.2	4.0	V						



Block diagram

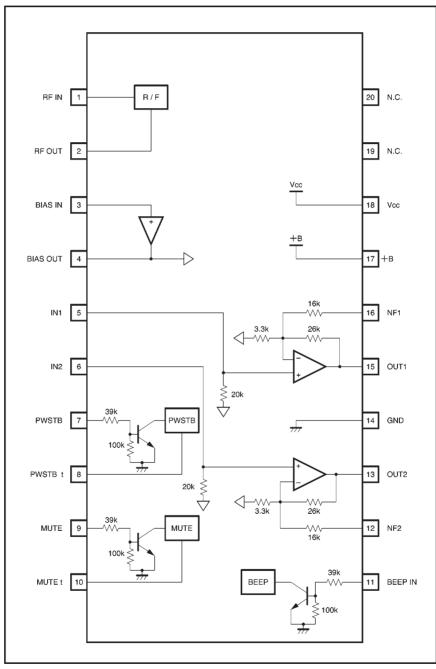

Pin descriptions

Pin No.	Pin name	1/0	Equivalent circuit	Function
1	RF IN	I		Ripple filter amplifier input
2	RF OUT	0	1 3 30k 30k 30k 30k 75k ₹30k	Ripple filter amplifier output
3	BIAS IN	I		Bias amplifier input
4	BIAS OUT	0	⁷⁷⁷ ≩ ≩2k	Bias amplifier output
7	PWSTB	I	₹39k 100k ₩ ₩ 2k ₹2k ₩ 2k	Power standby switch High:Standby canceled Low:Standby
8	PWSTB t	1/0	$\begin{array}{c} & & & \\ & & \\ & & \\ & \\ & \\ & \\ & \\ & $	Constant pin for power standby switching
9	MUTE	I	[®] ₹39k 100k ₹2k ₹2k	Power muting switch High:Muted Low:Muting canceled
10	MUTE t	1/0	$ \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\$	Constant pin for power muting switching


Pin No.	Pin name	1/0	Equivalent circuit	Function
5	IN1	I		Power amplifier input
6	IN2	I	16k ▲ 16 3.3k 26k ▲ 12	
15	OUT1	о		Power amplifier output
13	OUT2	о		
16	NF1	I	BIAS	Feedback pin in low-pass range This corrects attenuation in the
12	NF2	I	OUT	low pitch range caused by the output coupling capacitor.
11	BEEP IN	I	100k 2k 777	BEEP amplifier input
14	GND	I		Ground
17	+в	I	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Battery power supply (power supply for terminal stage of power amplifier)
18	Vcc	I		Booster power supply

$R_{L} = 16\Omega$, f = 1kHz, DIN AUDIO)									
Parameter	Symbol	Min.	Тур.	Max.	Unit	Coniditions			
Vcc quiescent current	loı	_	3.2	5.0	mA	V _{IN1,2} =0			
+B quiescent current	102	—	3.3	6.4	mA	V _{IN1,2} =0			
Vcc operating current	lin1	—	3.3	5.2	mA	Po1,2=0.5mW			
+B operating current	lin2	—	6.8	9.8	mA	Po1,2=0.5mW			
+B leak current	ΔI+в	—	0	3.0	μA	+B input current when Vcc=0V			
Voltage gain	Gv	9.6	11.6	13.9	dB	_			
Frequency characteristic 1	∆Gvı	1.1	3.3	5.5	dB	Gv (1kHz)—Gv (50Hz)			
Frequency characteristic 2	∆ Gv2	0	0.5	3.0	dB	Gv (1kHz)—Gv (20kHz), 80kHz LPF			
Total harmonic distortion	THD	—	0.1	0.5	%	Vo=0.1Vrms			
Rated output	Po	5.6	10.0	_	mW	THD=10%			
Output noise voltage	VNO	_	-98	-92	dBm	Rg=0, IHF A			
Input resistance	RIN	15	20.7	25	kΩ	_			
Channel separation	CS	60	77	—	dB	Rg=0, Vo=0.2Vrms, 1kHz BPF			
Muting level	ML	-	-98	-92	dBm	V _{IN} =-30dBV, V₃=2.8V, 1kHz BPF			
Ripple rejection 1	RR1	62	72	_	dB	Rg=0, f _R =100Hz, 100Hz BPF V _R =-20dBm applied only to Vcc			
Ripple rejection 2	RR₂	63	73	_	dB	Rg=0, f _R =100Hz, 100Hz BPF V _R = -20 dBm applied only to +B			
BEEP IN pin inflow current	Івр	_	50	100	μA	In when V11=Vcc			
BEEP output voltage	VBP	2.6	6.0	10.0	mV _{P-P}	V _{BPIN} =2.8V _{P-P} , f=1kHz			
PWSTB OFF pin voltage	Vs	_	0.95	1.4	v	V_7 when $V_8 \ge 0.5V$			
PWSTB OFF pin inflow current	ls	_	52	100	μA	I7 when V7=Vcc			
MUTE ON pin voltage	νм	—	0.95	1.4	v	V_9 when $V_{10} \ge 0.5V$			
MUTE ON pin inflow current	Ім	_	52	100	μA	Is when Vs=Vcc			

•Electrical characteristics (unless otherwise noted, Ta = 25°C, Vcc = 2.8V, +B = 1.2V, PWSTB = 2.8V, MUTE = 0V, R_L = 16 Ω , f = 1kHz, DIN AUDIO)

ONot designed for radiation resistance.

Measurement circuit

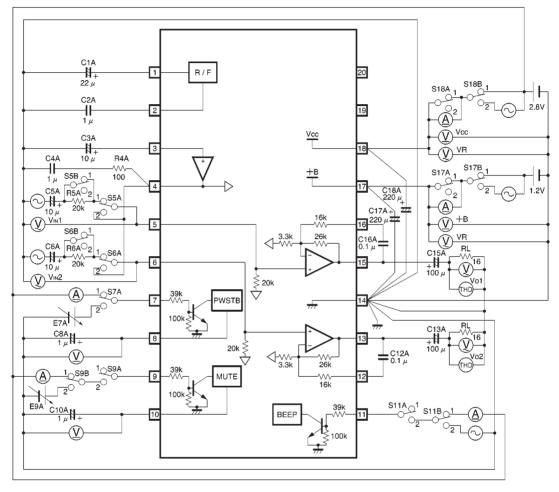


Fia		1
' '9	٠	

Measurement conditions

Parameter	Symbol	S5A	S5B	S6A	S6B	S7A	S9A	S9B	S11A	S11B	S17A	S17B	S18A	S18B
Vcc quiescent current	loı	1	1	1	1	1	1	1	1	1	1	1	2	1
+B quiescent current	l02	Ļ	ţ	Ļ	Ļ	Ļ	ţ	Ļ	Ļ	ţ	2	Ļ	1	Ļ
Vcc operating current	lin1	Ļ	Ļ	Ļ	Ļ	Ļ	ţ	Ļ	Ļ	Ļ	1	Ļ	2	Ļ
+B operating current	IIN2	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	2	Ļ	1	Ļ
+B leak current	∆I+в	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	2	Ļ	1	Ļ
Voltage gain	Gv	Ļ	Ļ	↓	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	1	Ļ	Ļ	Ļ
Voltage gain deviation 1	∆Gvı	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
Voltage gain deviation 2	∆Gv₂	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
Total harmonic distortion	THD	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
Rated output	Po	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
Output noise voltage	VNO	2	Ļ	2	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
Input resistance	Rin	1	2	1	2	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
Channel separation	CS	1/2	1	2/1	1	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
Muting level	ML	1	Ļ	1	Ļ	Ļ	2	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
Ripple rejection 1	RR1	2	Ļ	2	Ļ	Ļ	1	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	2
Ripple rejection 2	RR2	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	ţ	Ļ	Ļ	Ļ	2	Ļ	1
BEEP IN pin inflow current	Івр	1	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	2	Ļ	Ļ	Ļ	Ļ	Ļ
BEEP output voltage	VBP	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ	2	Ļ	Ļ	Ļ	Ļ
PWSTB OFF pin voltage	Vs	Ļ	Ļ	Ļ	Ļ	2	ţ	Ļ	1	ţ	Ļ	Ļ	Ļ	Ļ
PWSTB OFF pin inflow current	ls	Ļ	Ļ	Ļ	Ļ	1	ţ	Ļ	Ļ	ţ	Ļ	Ļ	Ļ	Ļ
MUTE ON pin voltage	Vм	Ļ	Ļ	Ļ	Ļ	Ļ	2	2	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ
MUTE ON pin inflow current	Ім	Ļ	Ļ	Ļ	Ļ	Ļ	2	1	Ļ	Ļ	Ļ	Ļ	Ļ	Ļ

Circuit operation


(1) The BA3577FS operates at the timing chart shown below, which prevents popping noises in the headphone output.

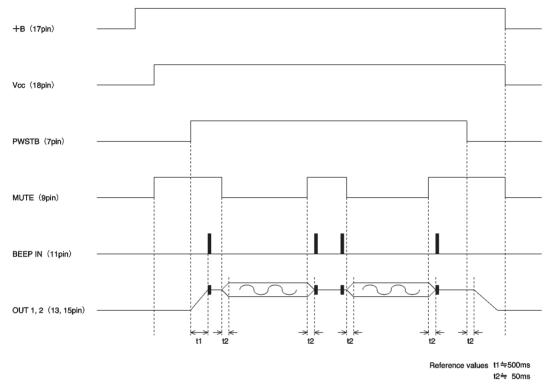

(2) The ripple filters (pins 1 and 2) and bias amplifiers (pins 3 and 4) of the BA3577FS cannot be used as external power supplies or reference voltages.

(3) The BA3577FS outputs a BEEP signal only when the PWSTB pin (pin 7) and the MUTE pin (pin 9) are HIGH. Also, input a rectangular waveform of 500Hz to 5kHz with an amplitude from the GND to Vcc to the BEEP IN pin (pin 11).


Application example

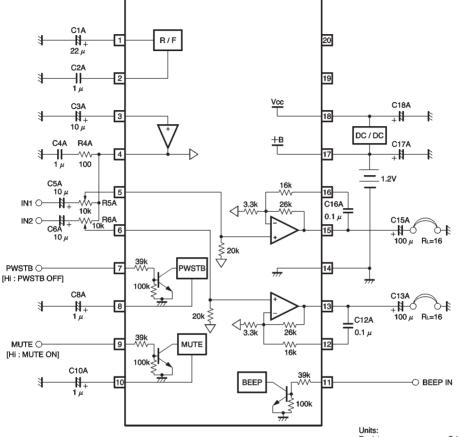

 Resistance
 : Ω (± 5%)

 Capacitance (film)
 : F (±10%)

 Capacitance (electrolytic): F (±20%)



supply voltage

a P Vcc=2.8V +B=1.2V f=1kHz CONSUMPTION CURRENT : IN1 (Vcc) : IN2 (+B) . 01 $R_L=16\Omega$ BPF=400~30kHz 11N2 (+B) 10 lini (Vcc) 0 0 2 4 6 8 10 12 OUTPUT POWER : Pout (mW / ch)




Fig.4 Current consumption vs. output power

Fig.5 Output voltage vs. input voltage

Fig.2



