

# 6V/430mW single-channel power amplifier

## BA526

The BA526 is a high-output monolithic power amplifier with excellent audio quality. With a 6V power supply, it has a rated output of 430mW into an 8Ω load (THD = 10%), and a maximum output of 700mW. It comes in a compact 9-pin SIP package.

### ● Applications

Portable radios,  
TV sets,  
cassette recorders,  
interphones,  
and wireless transceivers


Power amplifiers

### ● Features

- 1) High output.  $P_{out} = 430\text{mW}$  ( $V_{cc} = 6\text{V}$  and an  $8\Omega$  load (THD = 10%).)
- 2) Good low voltage characteristics. Begins operating at 2V.
- 3) Easy-to-mount 9-pin SIP package.
- 4) Extremely low high-frequency distortion with small signals. Uses soft clipping for good audio quality.
- 5) Power-on "pop" noise is suppressed.
- 6) Low noise.

Low-frequency amplifiers


### ● Block diagram

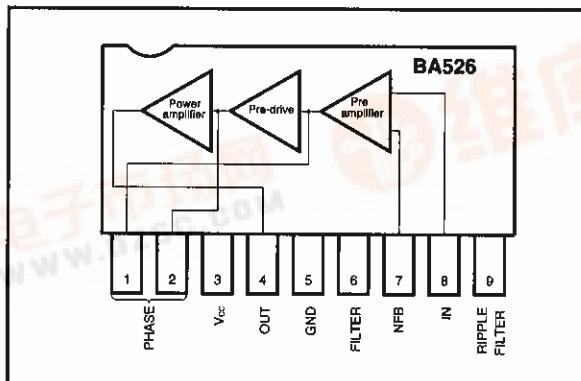

ROHM

373

● Internal circuit diagram

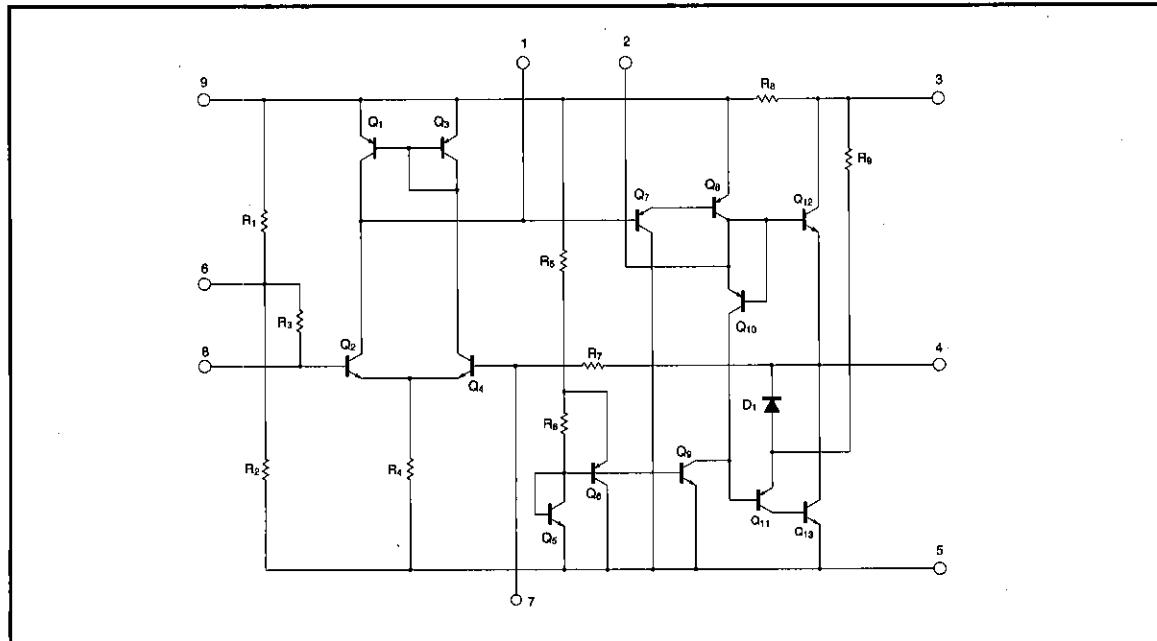

● Absolute maximum ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Limits	Unit
Supply voltage	$V_{CC}$	9	V
Power dissipation	$P_d$	950*	mW
Operating temperature	$T_{opr}$	-10~65	°C
Storage temperature	$T_{stg}$	-30~125	°C

\* Reduced by 9.5mW for each increase in  $T_a$  of  $1^\circ\text{C}$  over  $25^\circ\text{C}$ .

● Electrical characteristics (unless otherwise specified  $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 6\text{V}$ ,  $R_L = 8\Omega$  and  $f = 1\text{kHz}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition	Measurement Circuit
Quiescent circuit current	$I_Q$	—	12	24	mA	$V_{IN}=0\text{V}_{rms}$	Fig.1
Closed-circuit voltage gain	$G_{VC}$	48	52	54	dB	$R_{NF}=47\Omega$ , $V_{IN}=2.5\text{mV}_{rms}$	Fig.1
Maximum output power	$P_{OM}$	600	700	—	mW	$V_{IN}=25\text{mV}_{rms}$	Fig.1
Rated output power	$P_{OUT}$	350	430	—	mW	$\text{THD}=10\%$	Fig.1
Output noise voltage	$V_{NO}$	—	0.25	0.7	$\text{mV}_{rms}$	$R_g=0\Omega$	Fig.1
Total harmonic distortion	THD	—	0.4	2	%	$P_o=50\text{mW}$	Fig.1
Input resistance	$R_{IN}$	—	22	—	kΩ	$P_o=50\text{mW}$	Fig.1

## ● Measurement circuit

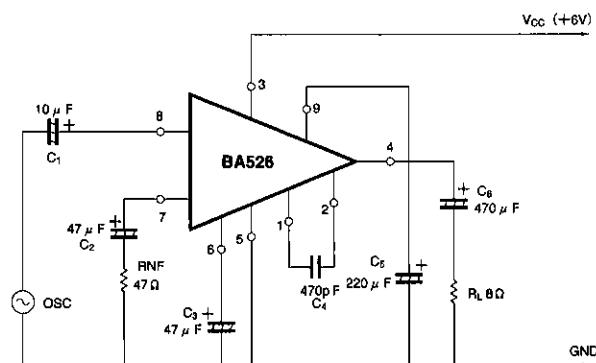


Fig. 1

## ● Application example

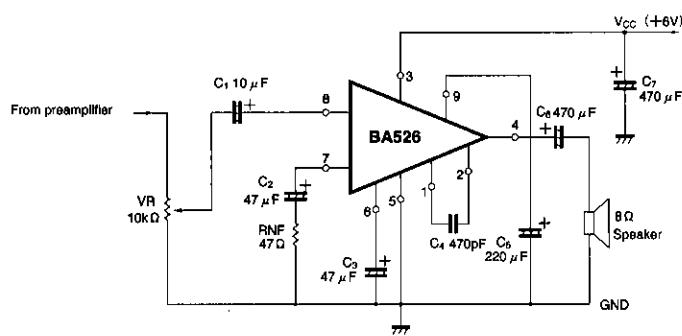


Fig. 2

## ● External dimensions (Unit: mm)

