

The RF MOSFET Line**RF Power Field Effect Transistors****N-Channel Enhancement-Mode Lateral MOSFETs**

Designed for broadband commercial and industrial applications with frequencies from 865 to 895 MHz. The high gain and broadband performance of these devices make them ideal for large-signal, common source amplifier applications in 26 volt base station equipment.

- Typical CDMA Performance @ 880 MHz, 26 Volts, $I_{DQ} = 2 \times 500$ mA
IS-97 CDMA Pilot, Sync, Paging, Traffic Codes 8 Through 13

Output Power — 26 Watts

Power Gain — 16 dB

Efficiency — 26%

Adjacent Channel Power —


750 kHz: -45 dBc @ 30 kHz BW

1.98 MHz: -60 dBc @ 30 kHz BW

- Capable of Handling 10:1 VSWR, @ 26 Vdc, 880 MHz, 120 Watts (CW)
Output Power
- Characterized with Series Equivalent Large-Signal Impedance Parameters
- Integrated ESD Protection
- Designed for Maximum Gain and Insertion Phase Flatness
- Excellent Thermal Stability
- Available with Low Gold Plating Thickness on Leads. L Suffix Indicates 40 μ " Nominal.
- In Tape and Reel. R3 Suffix = 250 Units per 56 mm, 13 inch Reel.

**MRF9120R3
MRF9120LR3**

**880 MHz, 120 W, 26 V
LATERAL N-CHANNEL
RF POWER MOSFETs**



**CASE 375B-04, STYLE 1
NI-860**

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	- 0.5, +65	Vdc
Gate-Source Voltage	V_{GS}	- 0.5, +15	Vdc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	250 1.43	W W/ $^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to +150	$^\circ\text{C}$
Operating Junction Temperature	T_J	200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value (1)	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.45	$^\circ\text{C}/\text{W}$

ESD PROTECTION CHARACTERISTICS

Test Conditions	Class
Human Body Model	1 (Minimum)
Machine Model	M1 (Minimum)

(1) MTTF calculator available at <http://www.motorola.com/semiconductors/rf>. Select Tools/Software/Application Software/Calculators to access the MTTF calculators by product.

NOTE - CAUTION - MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.

Freescale Semiconductor, Inc.

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS⁽¹⁾					
Zero Gate Voltage Drain Leakage Current ($V_{DS} = 65 \text{ Vdc}$, $V_{GS} = 0 \text{ Vdc}$)	I_{DSS}	—	—	10	μAdc
Zero Gate Voltage Drain Leakage Current ($V_{DS} = 26 \text{ Vdc}$, $V_{GS} = 0 \text{ Vdc}$)	I_{DSS}	—	—	1	μAdc
Gate-Source Leakage Current ($V_{GS} = 5 \text{ Vdc}$, $V_{DS} = 0 \text{ Vdc}$)	I_{GSS}	—	—	1	μAdc
ON CHARACTERISTICS⁽¹⁾					
Gate Threshold Voltage ($V_{DS} = 10 \text{ Vdc}$, $I_D = 200 \mu\text{Adc}$)	$V_{GS(\text{th})}$	2	3	4	Vdc
Gate Quiescent Voltage ($V_{DS} = 26 \text{ Vdc}$, $I_D = 450 \text{ mAdc}$)	$V_{GS(Q)}$	—	3.8	—	Vdc
Drain-Source On-Voltage ($V_{GS} = 10 \text{ Vdc}$, $I_D = 1.3 \text{ Adc}$)	$V_{DS(\text{on})}$	—	0.17	0.4	Vdc
Forward Transconductance ($V_{DS} = 10 \text{ Vdc}$, $I_D = 4 \text{ Adc}$)	g_{fs}	—	5.3	—	S
DYNAMIC CHARACTERISTICS⁽¹⁾					
Output Capacitance ($V_{DS} = 26 \text{ Vdc} \pm 30 \text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0 \text{ Vdc}$)	C_{oss}	—	50	—	pF
Reverse Transfer Capacitance ($V_{DS} = 26 \text{ Vdc} \pm 30 \text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0 \text{ Vdc}$)	C_{rss}	—	2	—	pF

(1) Each side of device measured separately.

(continued)


Freescale Semiconductor, Inc.

ELECTRICAL CHARACTERISTICS — continued ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
FUNCTIONAL TESTS (In Motorola Test Fixture, 50 ohm system) (2)					
Two-Tone Common-Source Amplifier Power Gain ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W PEP}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 880.0 \text{ MHz}$, $f_2 = 880.1 \text{ MHz}$)	G_{ps}	15	16.5	—	dB
Two-Tone Drain Efficiency ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W PEP}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 880.0 \text{ MHz}$, $f_2 = 880.1 \text{ MHz}$)	η	36	39	—	%
3rd Order Intermodulation Distortion ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W PEP}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 880.0 \text{ MHz}$, $f_2 = 880.1 \text{ MHz}$)	IMD	—	-31	-28	dBc
Input Return Loss ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W PEP}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 880.0 \text{ MHz}$, $f_2 = 880.1 \text{ MHz}$)	IRL	—	-16	-9	dB
Two-Tone Common-Source Amplifier Power Gain ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W PEP}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 895.0 \text{ MHz}$, $f_2 = 895.1 \text{ MHz}$)	G_{ps}	—	16.5	—	dB
Two-Tone Drain Efficiency ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W PEP}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 895.0 \text{ MHz}$, $f_2 = 895.1 \text{ MHz}$)	η	—	40.5	—	%
3rd Order Intermodulation Distortion ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W PEP}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 895.0 \text{ MHz}$, $f_2 = 895.1 \text{ MHz}$)	IMD	—	-30	—	dBc
Input Return Loss ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W PEP}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 895.0 \text{ MHz}$, $f_2 = 895.1 \text{ MHz}$)	IRL	—	-13	—	dB
Power Output, 1 dB Compression Point ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W CW}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 880.0 \text{ MHz}$)	P_{1dB}	—	120	—	W
Common-Source Amplifier Power Gain ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W CW}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 880.0 \text{ MHz}$)	G_{ps}	—	16	—	dB
Drain Efficiency ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W CW}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f_1 = 880.0 \text{ MHz}$)	η	—	51	—	%
Output Mismatch Stress ($V_{DD} = 26 \text{ Vdc}$, $P_{out} = 120 \text{ W CW}$, $I_{DQ} = 2 \times 500 \text{ mA}$, $f = 880.0 \text{ MHz}$, $VSWR = 10:1$, All Phase Angles at Frequency of Tests)	Ψ	No Degradation In Output Power			

(2) Device measured in push-pull configuration.

Freescale Semiconductor, Inc.

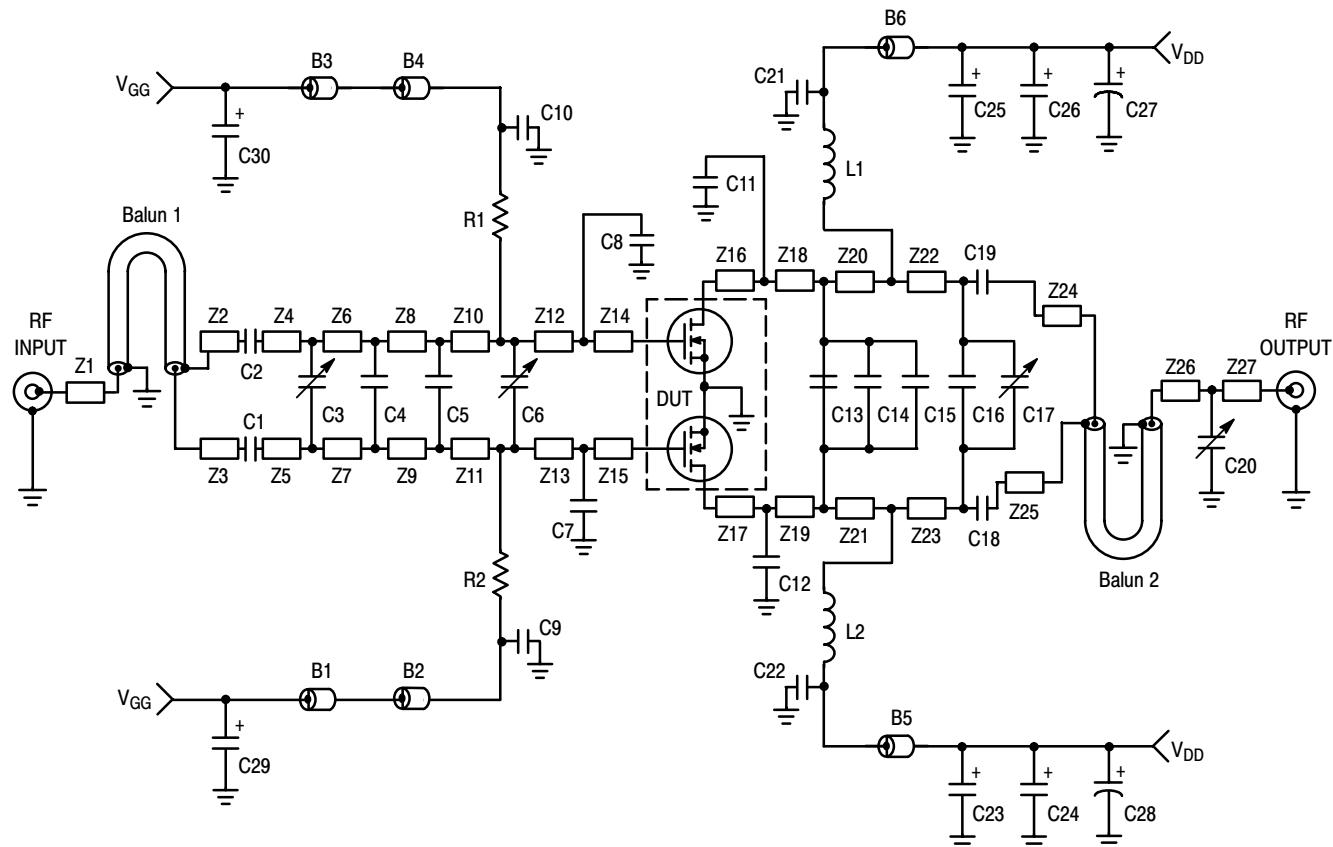

Z1	0.420" x 0.080" Microstrip
Z2, Z3	0.090" x 0.420" Microstrip
Z4, Z5	0.125" x 0.220" Microstrip
Z6, Z7	0.095" x 0.220" Microstrip
Z8, Z9	0.600" x 0.220" Microstrip
Z10, Z11	0.200" x 0.630" Microstrip
Z12, Z13	0.500" x 0.630" Microstrip

Z14, Z15	0.040" x 0.630" Microstrip
Z16, Z17	0.040" x 0.630" Microstrip
Z18, Z19	0.330" x 0.630" Microstrip
Z20, Z21	0.450" x 0.630" Microstrip
Z22, Z23	0.750" x 0.220" Microstrip
Z24, Z25	0.115" x 0.420" Microstrip
Z26	0.130" x 0.080" Microstrip
Z27	0.350" x 0.080" Microstrip

Figure 1. 880 MHz Broadband Test Circuit Schematic

Freescale Semiconductor, Inc.

Table 1. 880 MHz Broadband Test Circuit Component Designations and Values

Part	Description	Value, P/N or DWG	Manufacturer
B1, B3, B5, B6	Long Ferrite Beads, Surface Mount	95F787	Newark
B2, B4	Short Ferrite Beads, Surface Mount	95F786	Newark
C1, C2	68 pF Chip Capacitors, B Case	100B680JP500X	ATC
C3, C6	0.8 - 8.0 pF Variable Capacitors	44F3360	Newark
C4	7.5 pF Chip Capacitor, B Case	100B7R5JP150X	ATC
C5	3.3 pF Chip Capacitor, B Case	100B3R3CP150X	ATC
C7, C8	11 pF Chip Capacitors, B Case	100B110BCA500X	ATC
C9, C10, C21, C22	51 pF Chip Capacitors, B Case	100B510JP500X	ATC
C11, C12	6.2 pF Chip Capacitors, B Case	100B6R2BCA150X	ATC
C13	4.7 pF Chip Capacitor, B Case	100B4R7BCA150X	ATC
C14	5.1 pF Chip Capacitor, B Case	100B5R1BCA150X	ATC
C15	3.0 pF Chip Capacitor, B Case	100B2R7BCA150X	ATC
C16	2.7 pF Chip Capacitor, B Case	100B3R0BCA150X	ATC
C17	0.6 - 4.5 pF Variable Capacitor	44F3358	Newark
C18, C19	47 pF Chip Capacitors, B Case	100B470JP500X	ATC
C20	0.4 - 2.5 pF Variable Capacitor	44F3367	Newark
C29, C30	10 μ F, 35 V Tantalum Chip Capacitors	93F2975	Newark
C23, C24, C25, C26	22 μ F, 35 V Tantalum Chip Capacitors	92F1853	Newark
C27, C28	220 μ F, 50 V Electrolytic Capacitors	14F185	Newark
Balun 1, Balun 2	Xinger Surface Mount Balun Transformers	3A412	Anaren
L1, L2	12.5 nH Mini Spring Inductors	A04T-5	Coilcraft
R1, R2	510 Ω , 1/4 W Chip Resistors		Garret
WB1, WB2, WB3, WB4	10 mil Brass Wear Blocks		
Board Material	30 mil Glass Teflon [®] , $\epsilon_r = 2.55$ Copper Clad, 2 oz Cu	900 MHz Push-Pull Rev 01B	CMR
PCB	Etched Circuit Board	900 MHz Push-Pull Rev 01B	CMR

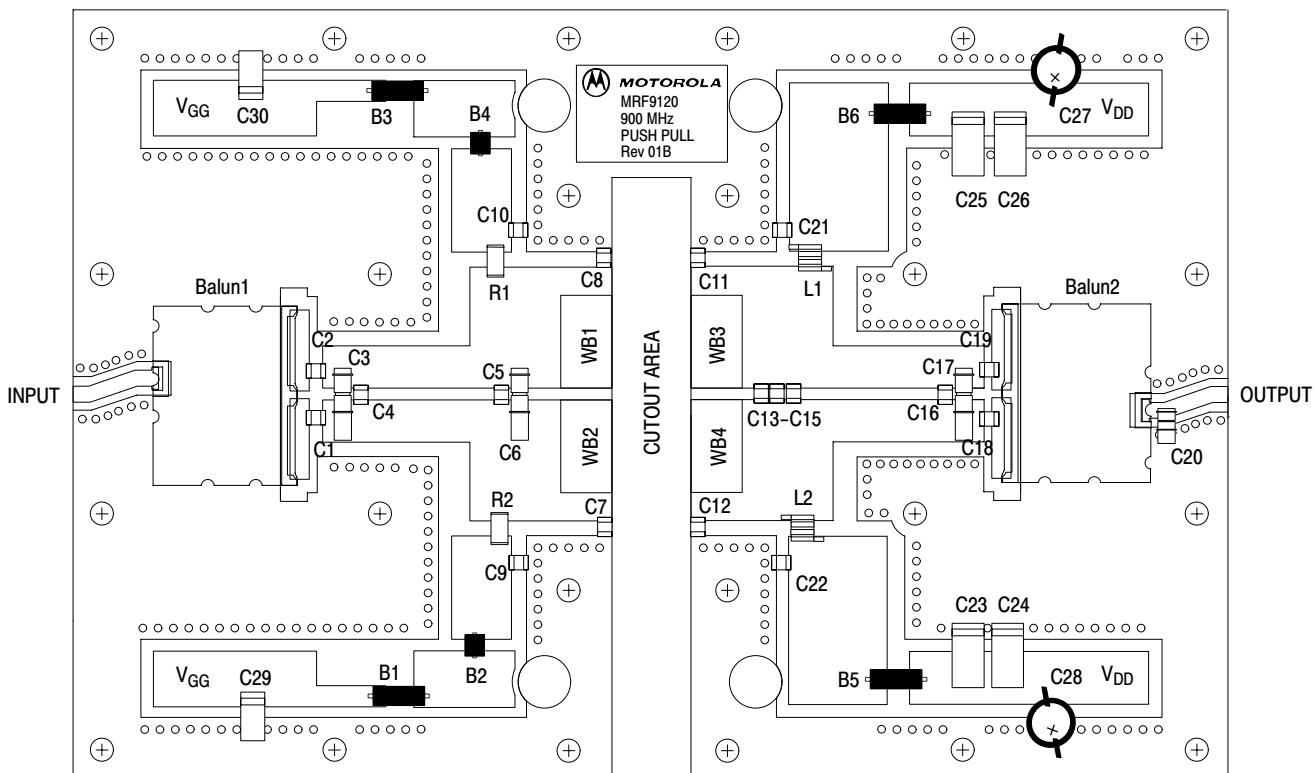


Figure 2. 865-895 MHz Broadband Test Circuit Component Layout

Freescale Semiconductor, Inc.

TYPICAL CHARACTERISTICS

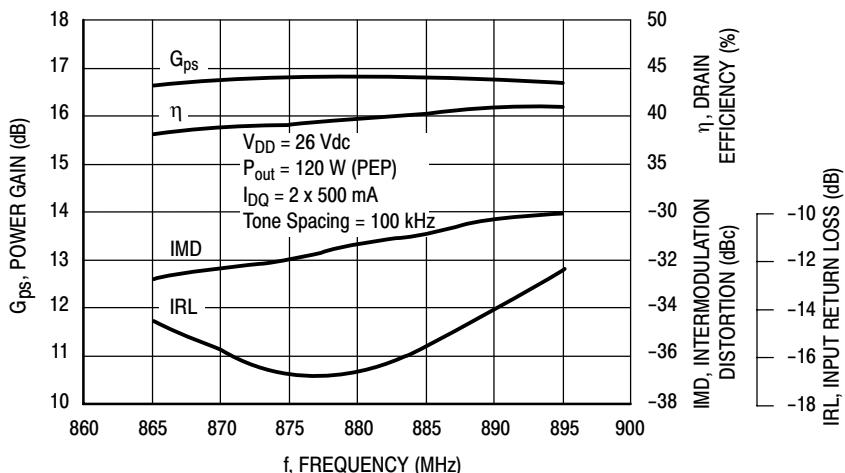


Figure 3. Class AB Broadband Circuit Performance

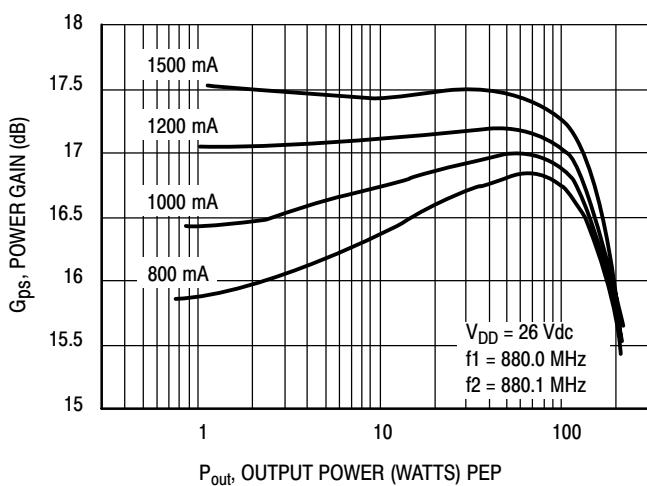


Figure 4. Power Gain versus Output Power

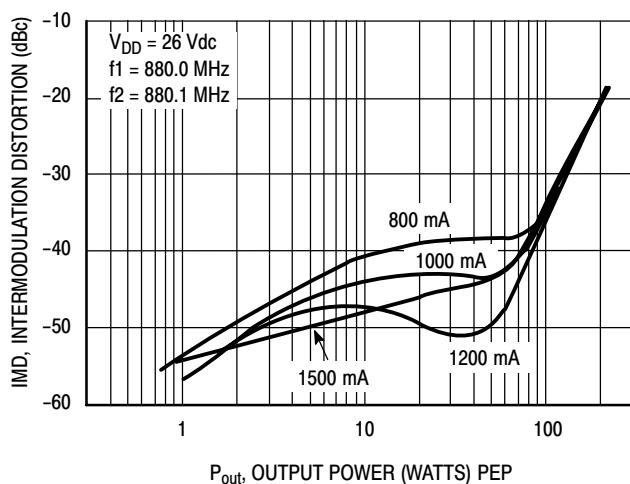


Figure 5. Intermodulation Distortion versus Output Power

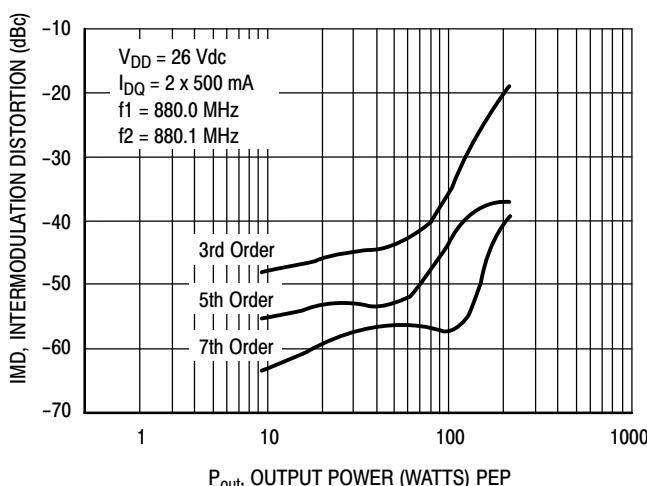


Figure 6. Intermodulation Distortion Products versus Output Power

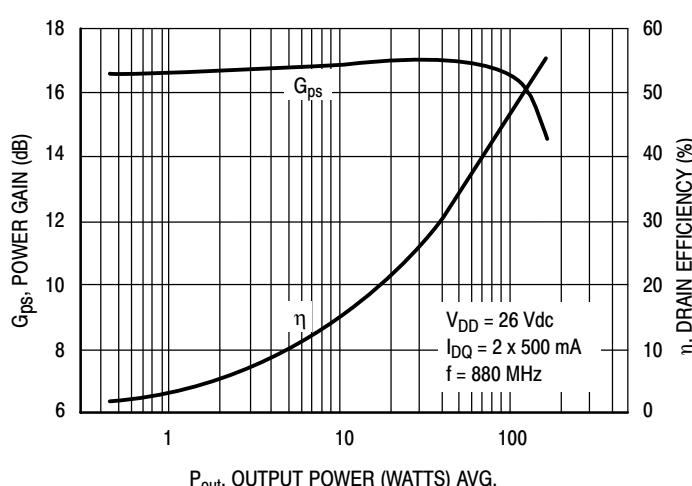


Figure 7. Power Gain and Efficiency versus Output Power

Freescale Semiconductor, Inc.

TYPICAL CHARACTERISTICS

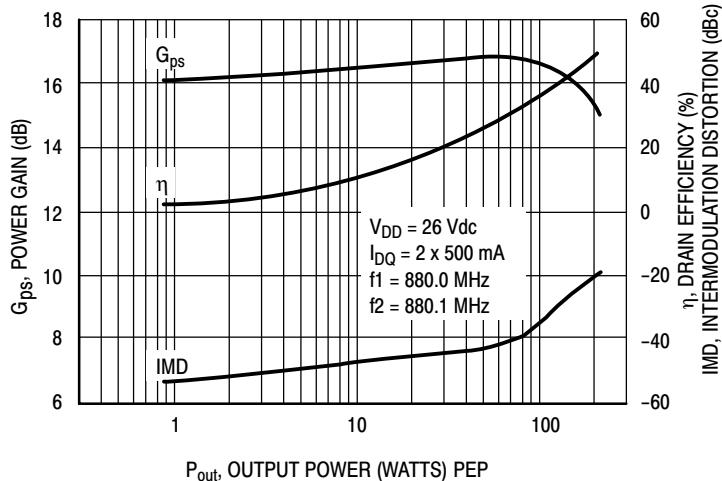


Figure 8. Power Gain, Efficiency and IMD versus Output Power


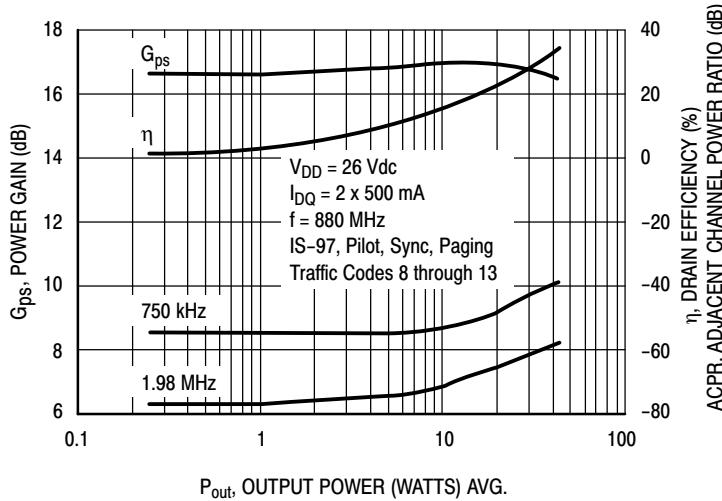


Figure 9. Power Gain, Efficiency and ACPR versus Output Power

Freescale Semiconductor, Inc.

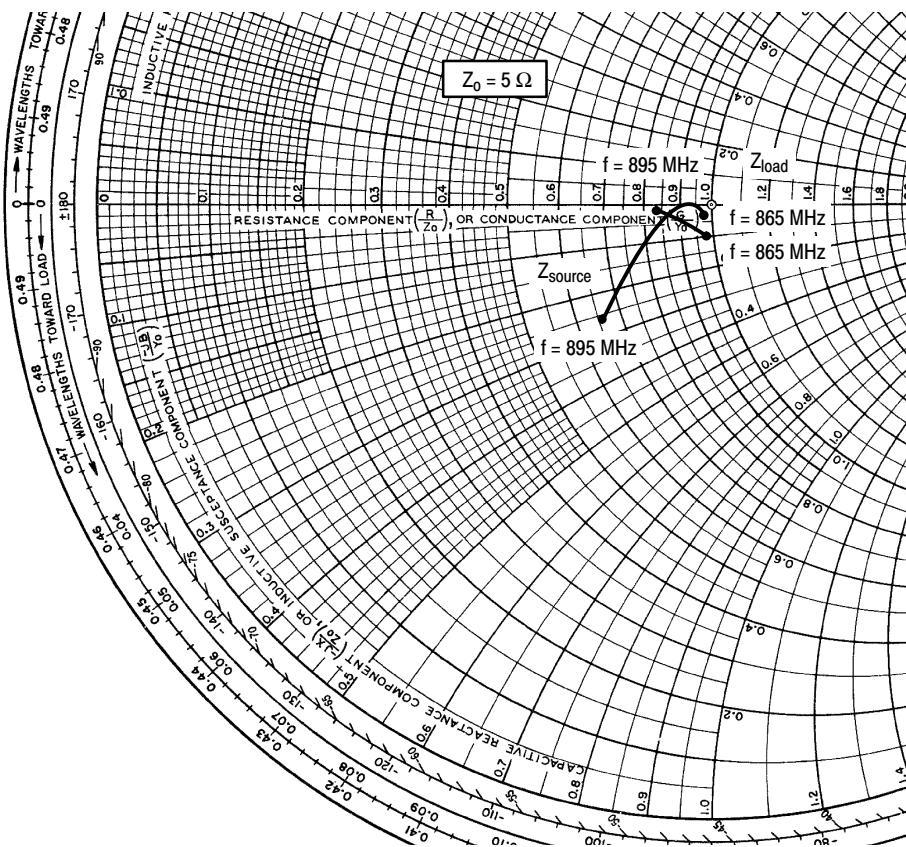

$V_{DD} = 26$ V, $I_{DQ} = 2 \times 500$ mA, $P_{out} = 120$ W PEP

f MHz	Z_{source} Ω	Z_{load} Ω
865	$4.89 - j0.2$	$4.9 - j0.5$
880	$4.54 + j0.07$	$4.6 - j0.32$
895	$3.29 - j1.3$	$4.2 - j0.04$

Z_{source} = Test circuit impedance as measured from gate to gate, balanced configuration.

Z_{load} = Test circuit impedance as measured from drain to drain, balanced configuration.

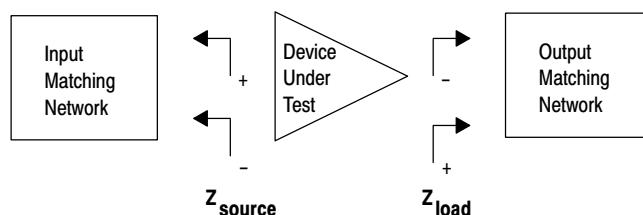


Figure 10. Series Equivalent Input and Output Impedance

Freescale Semiconductor, Inc.

NOTES


Freescale Semiconductor, Inc.
NOTES

Freescale Semiconductor, Inc.

NOTES

Freescale Semiconductor, Inc.

PACKAGE DIMENSIONS

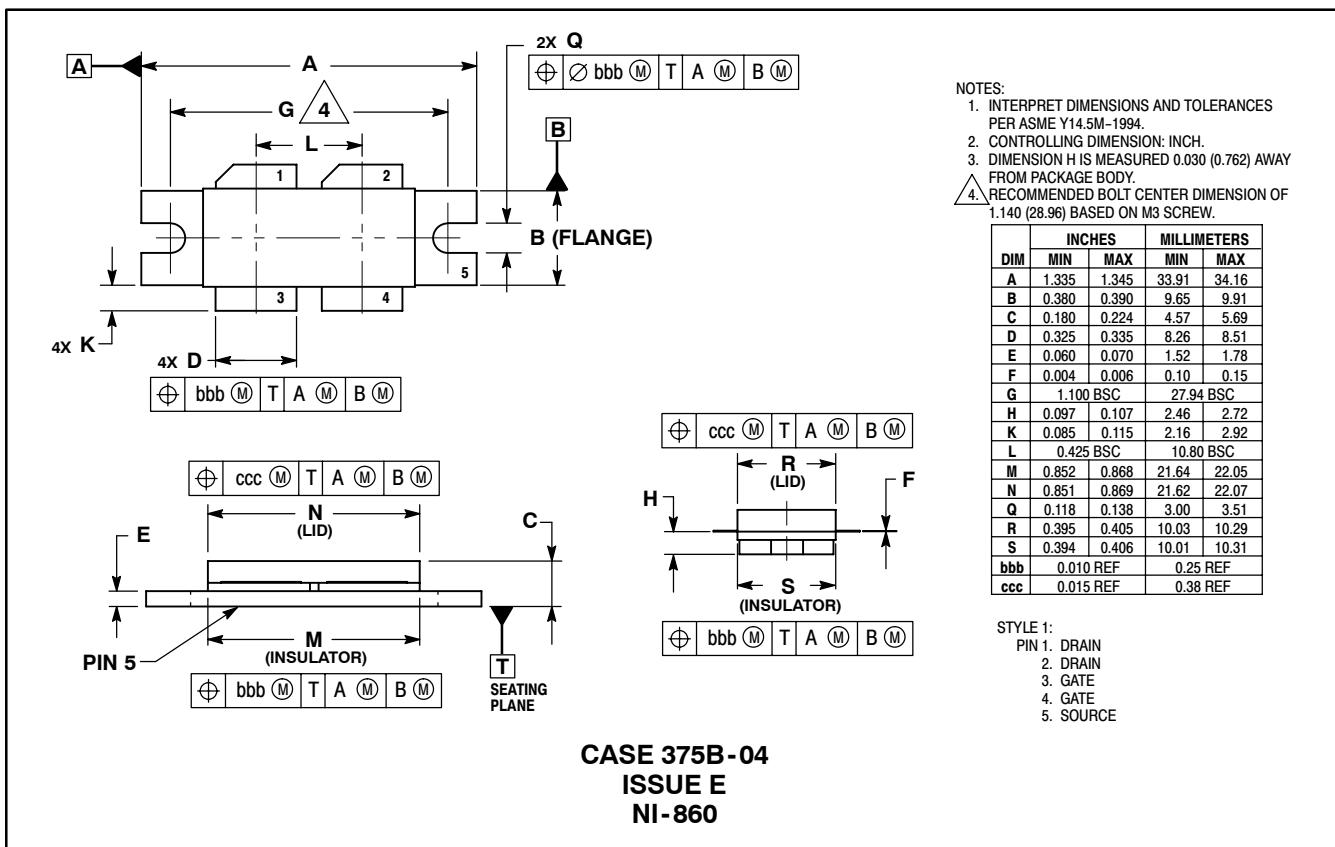

Information in this document is provided solely to enable system and software implementers to use Motorola products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.

MOTOROLA and the Stylized M Logo are registered in the US Patent and Trademark Office. All other product or service names are the property of their respective owners. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

© Motorola Inc. 2004

HOW TO REACH US:

USA/EUROPE/LOCATIONS NOT LISTED:

Motorola Literature Distribution
P.O. Box 5405, Denver, Colorado 80217
1-800-521-6274 or 480-768-2130

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center,
3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573, Japan
81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong
852-26668334

HOME PAGE: <http://www.freescale.com>