




**Advanced Power  
Electronics Corp.**

**AP2303GN**

**Pb Free Plating Product**

*P-CHANNEL ENHANCEMENT MODE  
POWER MOSFET*

- ▼ Simple Drive Requirement
- ▼ Small Package Outline
- ▼ Surface Mount Device




SOT-23 G

$BV_{DSS}$	-30V
$R_{DS(ON)}$	240m $\Omega$
$I_D$	-1.9A

### Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, low on-resistance and cost-effectiveness.



### Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	- 30	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D@T_A=25^\circ C$	Continuous Drain Current <sup>3</sup>	-1.9	A
$I_D@T_A=70^\circ C$	Continuous Drain Current <sup>3</sup>	-1.5	A
$I_{DM}$	Pulsed Drain Current <sup>1,2</sup>	-10	A
$P_D@T_A=25^\circ C$	Total Power Dissipation	1.38	W
	Linear Derating Factor	0.01	W/ $^\circ C$
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ C$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ C$

### Thermal Data

Symbol	Parameter	Value	Unit
Rthj-a	Thermal Resistance Junction-ambient <sup>3</sup>	Max. 90	$^\circ C/W$



## AP2303GN

### Electrical Characteristics @ $T_j=25^\circ\text{C}$ (unless otherwise specified)







Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	-30	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ\text{C}, I_D=-1\text{mA}$	-	-0.1	-	$V/^\circ\text{C}$
$R_{DS(ON)}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{GS}=-10V, I_D=-1.7A$	-	-	240	$m\Omega$
		$V_{GS}=-4.5V, I_D=-1.3A$	-	-	460	$m\Omega$
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1	-	-	V
$g_{fs}$	Forward Transconductance	$V_{DS}=-10V, I_D=-1.7A$	-	2	-	S
$I_{DSS}$	Drain-Source Leakage Current ( $T_j=25^\circ\text{C}$ )	$V_{DS}=-30V, V_{GS}=0V$	-	-	-1	$\mu A$
	Drain-Source Leakage Current ( $T_j=70^\circ\text{C}$ )	$V_{DS}=-30V, V_{GS}=0V$	-	-	-10	$\mu A$
$I_{GSS}$	Gate-Source Leakage	$V_{GS}=\pm 20V$	-	-	$\pm 100$	nA
$Q_g$	Total Gate Charge <sup>2</sup>	$I_D=-1.7A$	-	6.2	-	nC
$Q_{gs}$	Gate-Source Charge	$V_{DS}=-15V$	-	1.4	-	nC
$Q_{gd}$	Gate-Drain ("Miller") Charge	$V_{GS}=-10V$	-	0.3	-	nC
$t_{d(on)}$	Turn-on Delay Time <sup>2</sup>	$V_{DS}=-15V$	-	7.6	-	ns
$t_r$	Rise Time	$I_D=-1A$	-	8.2	-	ns
$t_{d(off)}$	Turn-off Delay Time	$R_G=6\Omega, V_{GS}=-10V$	-	17.5	-	ns
$t_f$	Fall Time	$R_D=15\Omega$	-	9	-	ns
$C_{iss}$	Input Capacitance	$V_{GS}=0V$	-	230	-	pF
$C_{oss}$	Output Capacitance	$V_{DS}=-15V$	-	130.4	-	pF
$C_{rss}$	Reverse Transfer Capacitance	$f=1.0\text{MHz}$	-	40	-	pF

### Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$I_S$	Continuous Source Current ( Body Diode )	$V_D=V_G=0V, V_S=-1.2V$	-	-	-1	A
$I_{SM}$	Pulsed Source Current ( Body Diode ) <sup>1</sup>		-	-	-10	A
$V_{SD}$	Forward On Voltage <sup>2</sup>	$I_S=-1.25A, V_{GS}=0V$	-	-	-1.2	V

#### Notes:

1. Pulse width limited by Max. junction temperature.
2. Pulse width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$ .
3. Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board ;  $270^\circ\text{C/W}$  when mounted on min. copper pad.

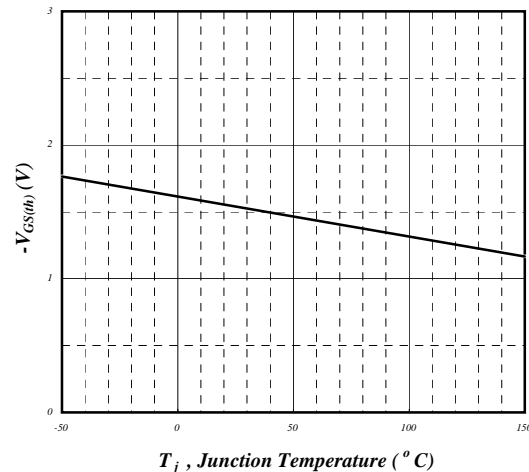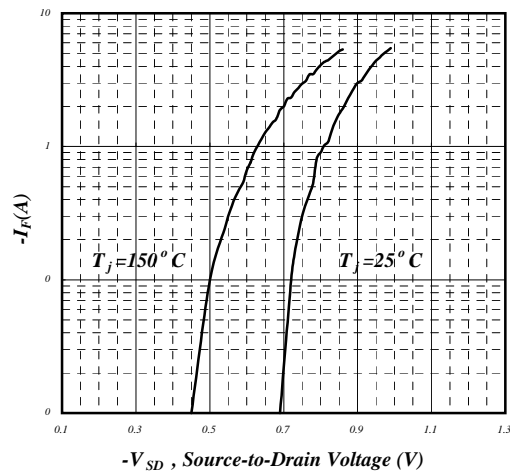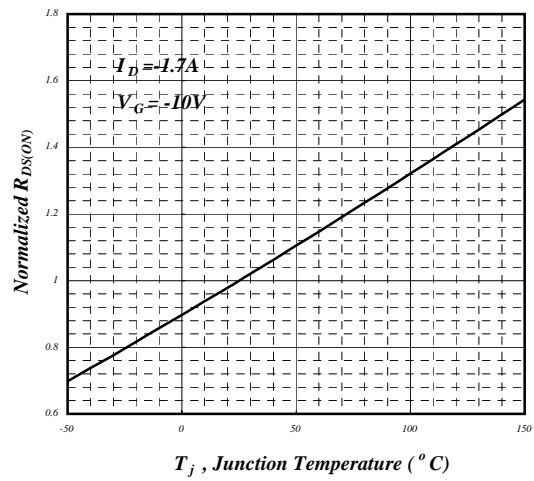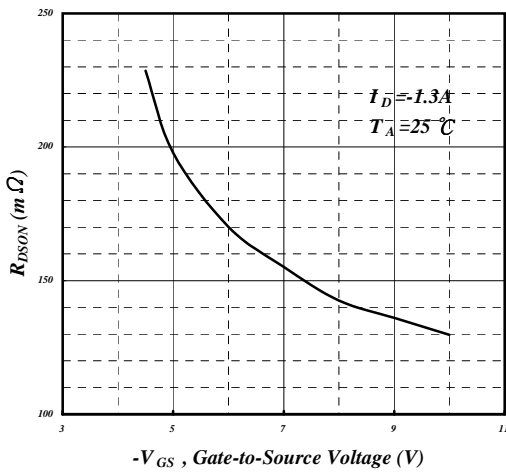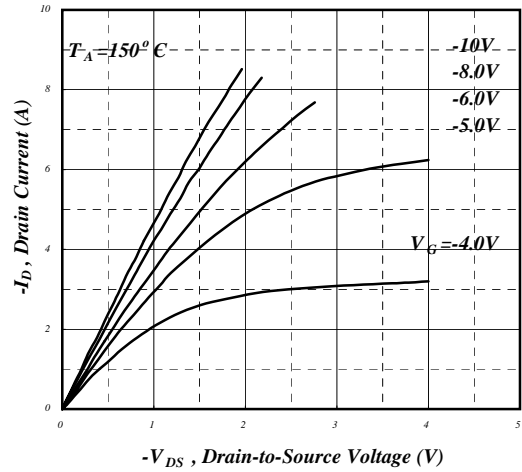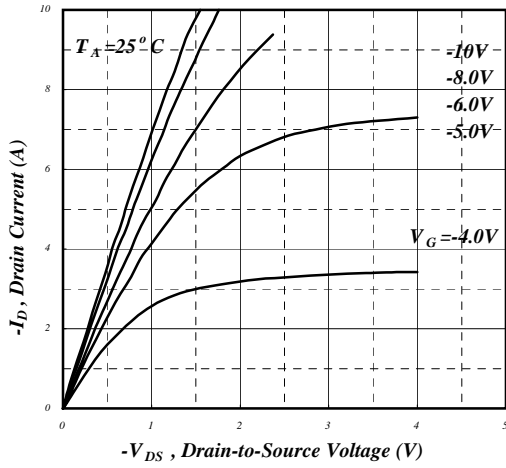

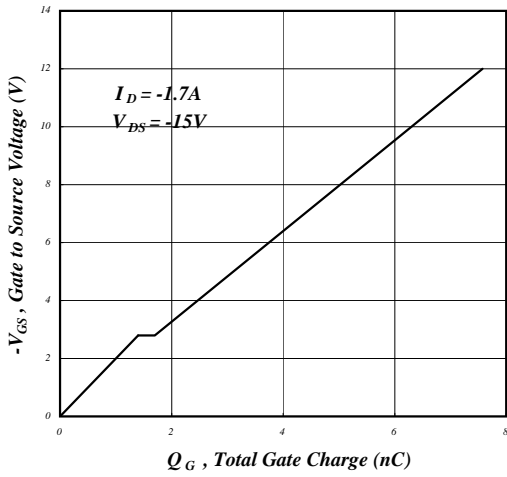


Fig 7. Gate Charge Characteristics

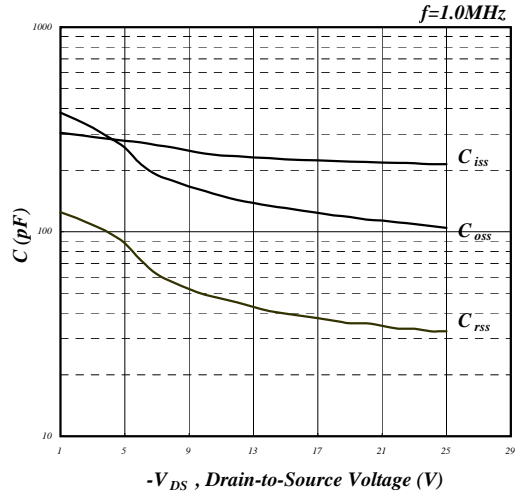


Fig 8. Typical Capacitance Characteristics

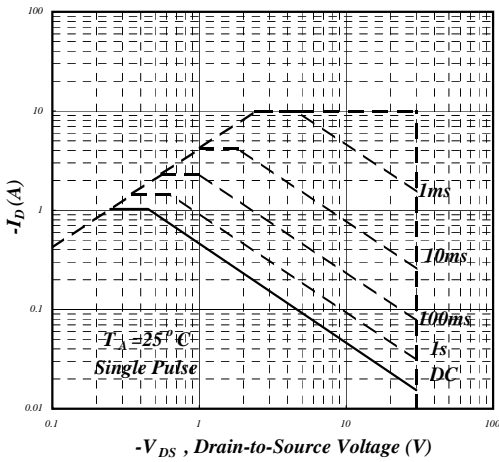


Fig 9. Maximum Safe Operating Area

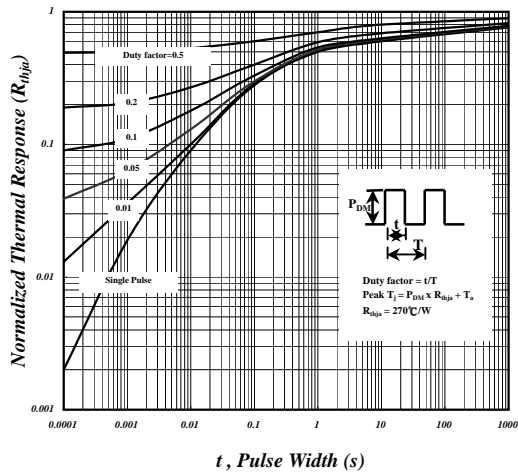


Fig 10. Effective Transient Thermal Impedance

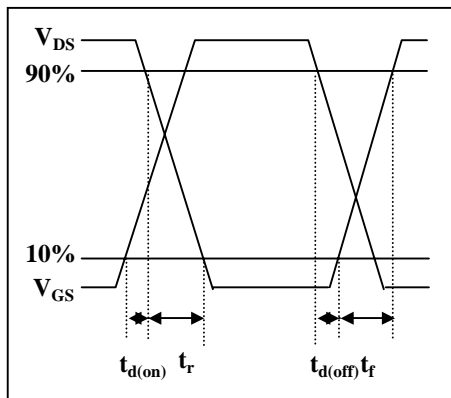


Fig 11. Switching Time Waveform

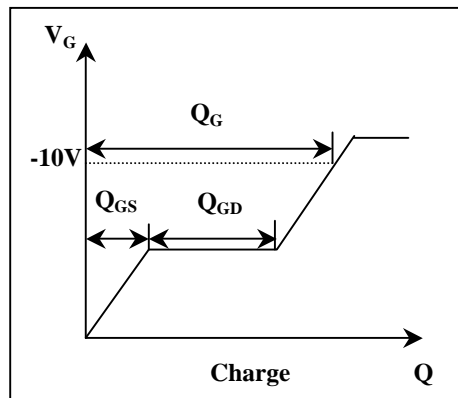


Fig 12. Gate Charge Waveform