

M57955L

HYBRID IC FOR DRIVING HIGH BETA TRANSISTOR MODULES

DESCRIPTION

M57955L is a Hybrid Integrated Circuit designed for driving High Beta Transistor Modules QM50DY-HB, etc., in an Inverter application. This device operates as an isolation amplifier Transistor Modules due to the electrical isolation between the input and output circuits with a opto-coupler, as well as its driving capability which only requires single power supply.

FEATURES


- Electrical isolation between input and output with integrated opto-coupler. $V_{iso}=2500V_{rms}$
- Applicable with single power supply (7 ~ 9V)
- Applicable with TTL input

APPLICATION


To drive High Beta Transistor Modules for Inverter applications

OUTLINE DRAWING


Dimensions in mm

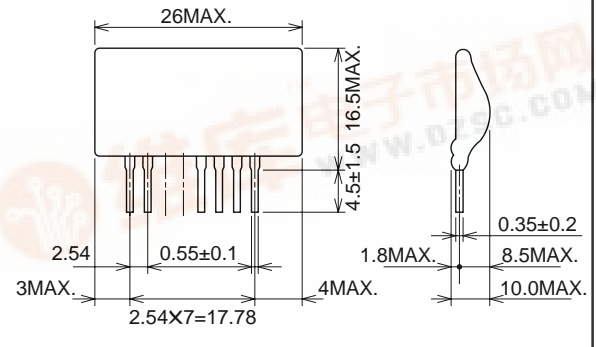

BLOCK DIAGRAM

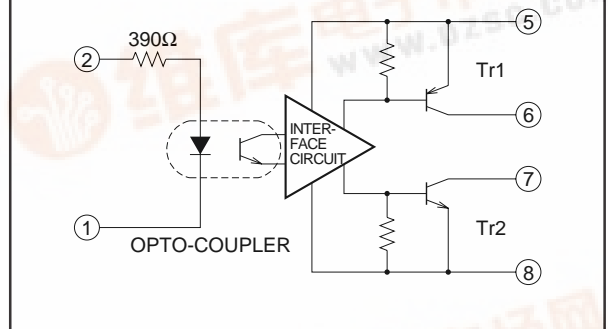

CIRCUIT DIAGRAM

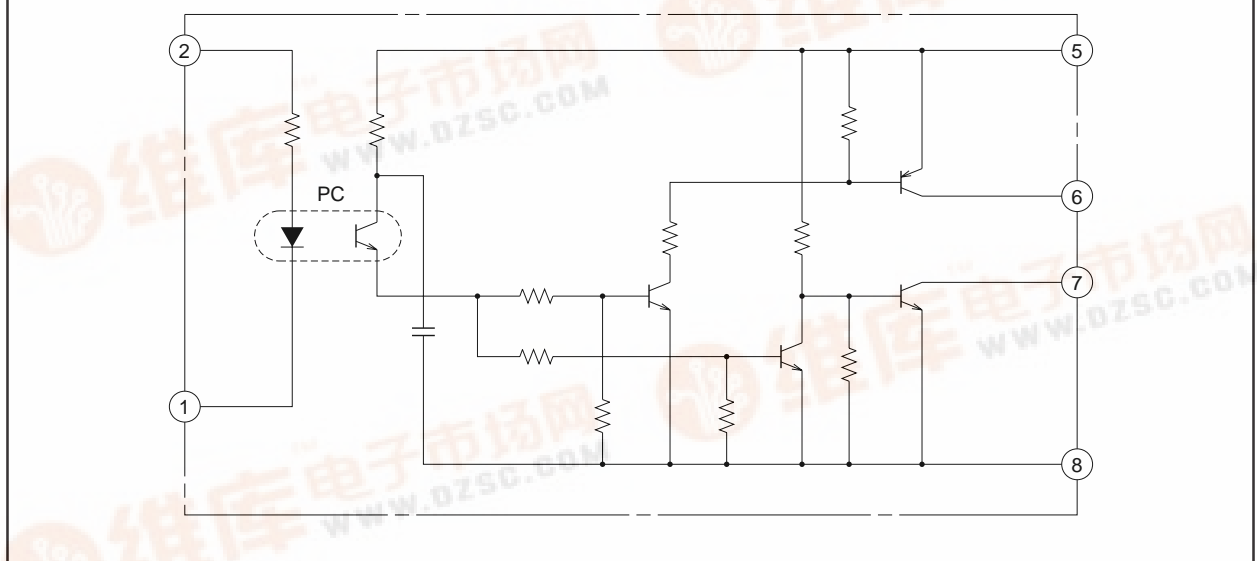

M57955L

HYBRID IC FOR DRIVING HIGH BETA TRANSISTOR MODULES

ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
VCC	Supply voltage	DC	12	V
VI	Input voltage		-1 ~ 7	V
IOH	Output voltage	Pulse width 10μs, Freq. 2kHz, peak value	-0.3	A
IOLP			1.3	A
Viso	Isolation voltage	Sinewave voltage 60Hz/min. Ta=25°C	2500	Vrms
Tj	Junction temperature		100	°C
Topg	Operating temperature		-20 ~ +70	°C
Tstg	Storage temperature		-25 ~ +100	°C






ELECTRICAL CHARACTERISTICS (Ta=25°C, VCC=8V, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IiH	"H" input current	VI=5V	-	10	-	mA
IOH	"H" output current	Rext1=36Ω	-	-0.1	-	A
IOLP	"L" output peak current	Cext=47μF, Rext2=0.2Ω	-	1	-	A
PD	Internal power dissipation	IOH=-0.1A, IOLP=1A, f=2kHz, D.F.=50%	-	0.26	-	W
tPLH	"L-H" propagation delay time		-	5	10	μs
tr	"L-H" rise time		-	-	1	μs
tPHL	"H-L" propagation delay time		-	8	15	μs
tf	"H-L" fall time		-	-	2	μs
VIN	Supply voltage	Recommended range	4.75	5	5.25	V
VCC		Recommended range	7	8	9	V

M57955L

HYBRID IC FOR DRIVING HIGH BETA TRANSISTOR MODULES



PERFORMANCE CURVES

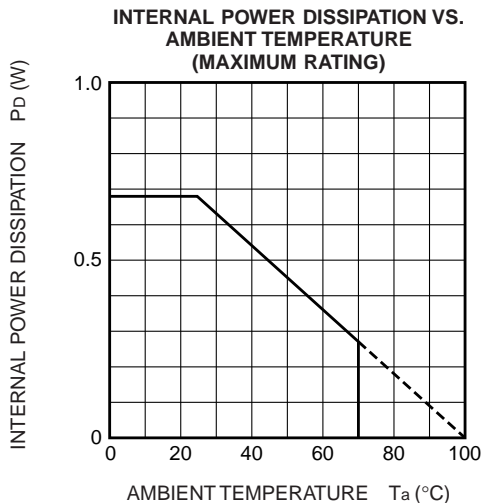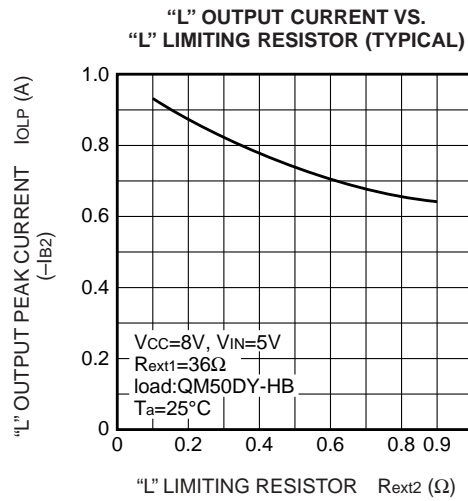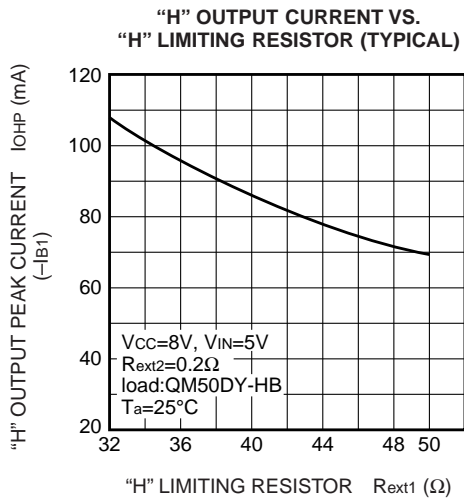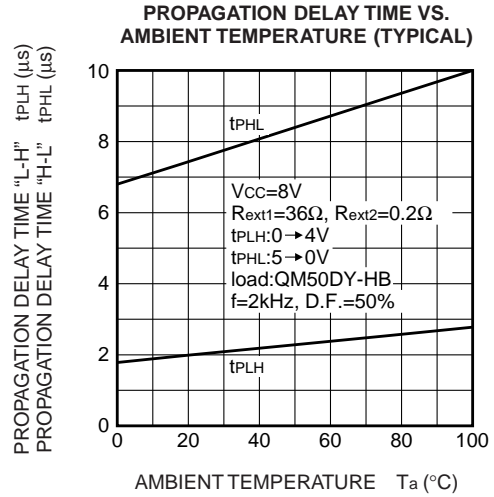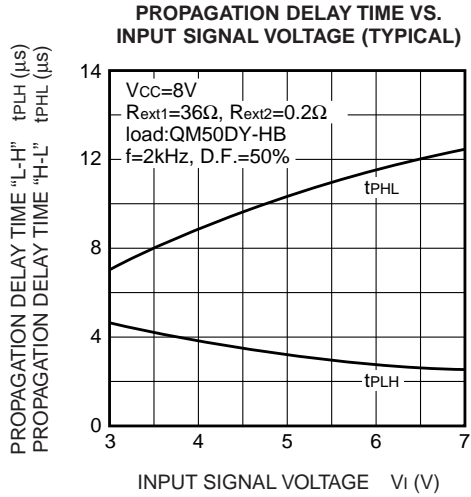

M57955L

HYBRID IC FOR DRIVING HIGH BETA TRANSISTOR MODULES

TEST CIRCUIT AND APPLICATION CIRCUIT EXAMPLE

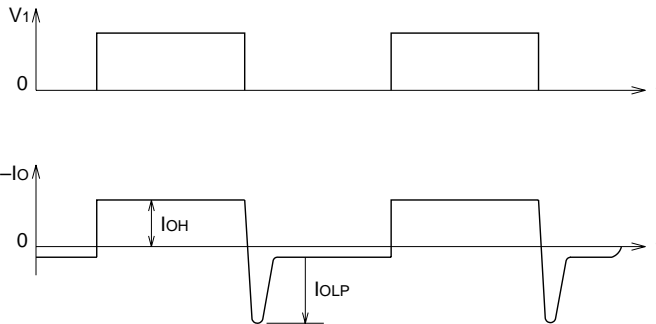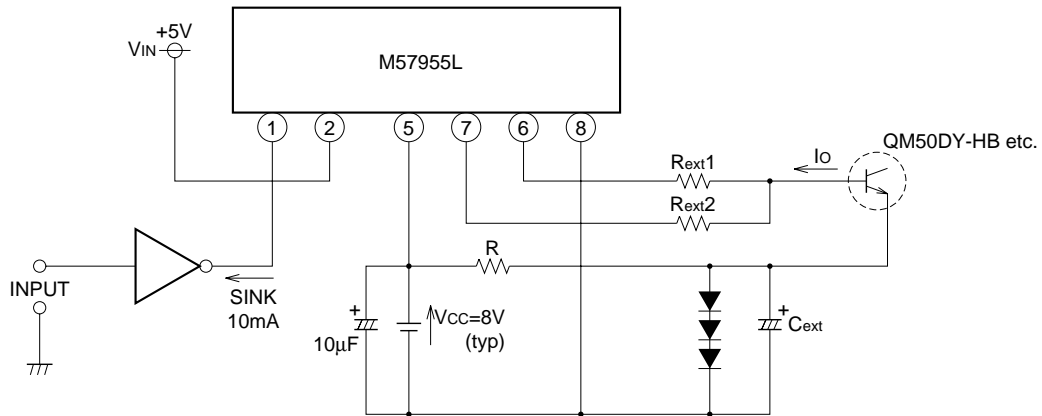

Note: IOH and IO LP correspond to base forward current Ib1 and base reverse current Ib2 of the transistor modules to be driven respectively.