

Transistors

Low frequency amplifier

QST6


●Application

Low frequency amplifier
Driver

●Features

- 1) A collector current is large.
- 2) $V_{CE(sat)} \leq -180mV$
At $I_C = -1A / I_B = -50mA$

●External dimensions (Units : mm)

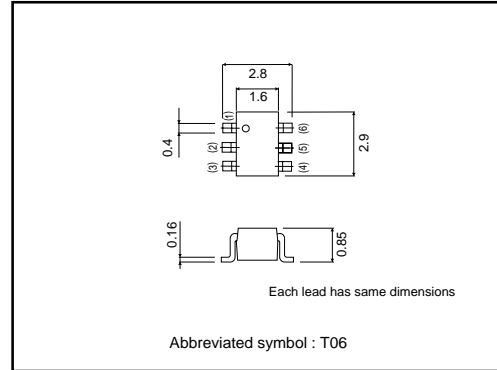


●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CB0}	-15	V
Collector-emitter voltage	V_{CE0}	-12	V
Emitter-base voltage	V_{EB0}	-6	V
Collector current	I_C	-2	A
	I_{CP}	-4	A*1
Power dissipation	P_C	500	mW*2
Junction temperature	T_j	150	°C
Range of storage temperature	T_{stg}	-55~+150	°C

*1Single pulse, $P_w=1ms$

*2Each Terminal Mounted on a Recommended

●Equivalent circuit



●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV_{CB0}	-15	-	-	V	$I_C = -10\mu A$
Collector-emitter breakdown voltage	BV_{CE0}	-12	-	-	V	$I_C = -1mA$
Emitter-base breakdown voltage	BV_{EB0}	-6	-	-	V	$I_E = -10\mu A$
Collector cutoff current	I_{CB0}	-	-	-100	nA	$V_{CB} = -15V$
Emitter cutoff current	I_{EB0}	-	-	-100	nA	$V_{EB} = -6V$
Collector-emitter saturation voltage	$V_{CE(sat)}$	-	-100	-180	mV	$I_C = -1A, I_B = -50mA$
DC current gain	h_{FE}	270	-	680	-	$V_{CE} = -2V, I_C = -200mA$ *
Transition frequency	f_T	-	360	-	MHz	$V_{CE} = -2V, I_E = 200mA, f = 100MHz$ *
Collector output capacitance	C_{ob}	-	15	-	pF	$V_{CB} = -10V, I_E = 0A, f = 1MHz$

* Pulsed

Transistors

●Packaging specifications

Type	Package	Taping
	Code	TR
	Basic ordering unit (pieces)	3000
QST6		○

●Electrical characteristic curves

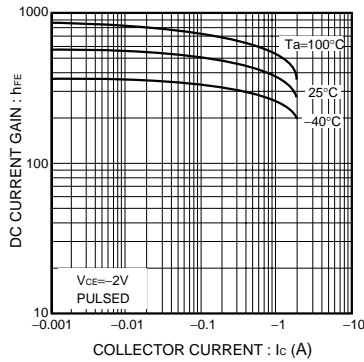


Fig.1. DC current gain vs. collector current

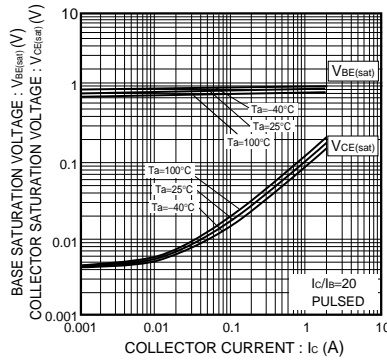


Fig.2. Collector-emitter saturation voltage vs. collector current

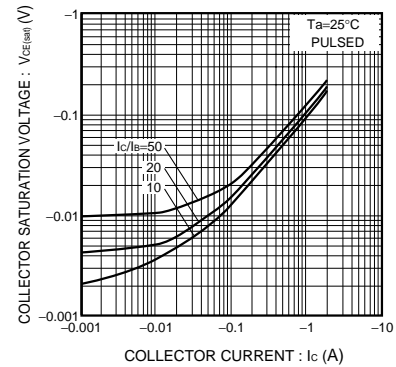


Fig.3. Collector-emitter saturation voltage vs. collector current

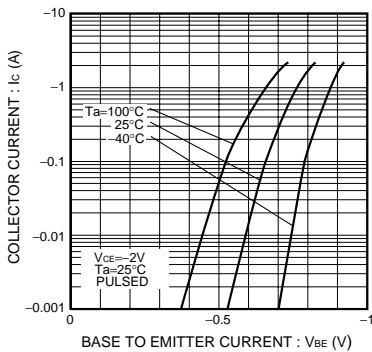


Fig.4. Grounded emitter propagation characteristics

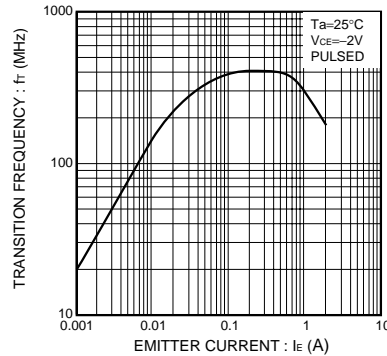


Fig.5. Gain bandwidth product vs. emitter current

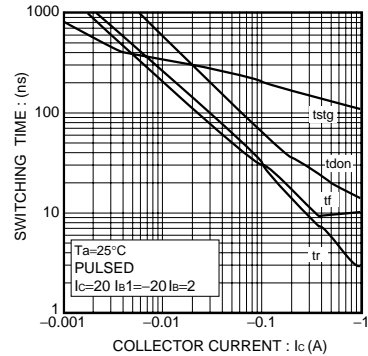


Fig.6. Switching time

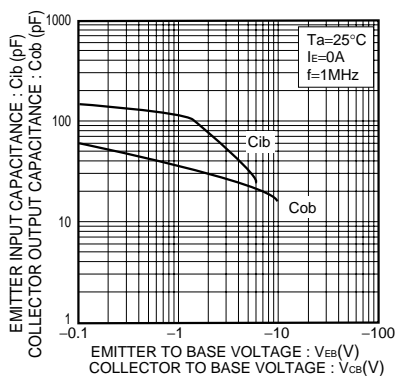


Fig.7. Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com