

XP6210

Silicon NPN epitaxial planer transistor

For switching/digital circuits

Features


- Two elements incorporated into one package.
(Transistors with built-in resistor)
- Reduction of the mounting area and assembly cost by one half.

Basic Part Number of Element

- UN1210 × 2 elements


Absolute Maximum Ratings (Ta=25°C)

| Parameter | Symbol | Ratings | Unit | |
|-------------------|------------------------------|------------------|-------------|----|
| Rating of element | Collector to base voltage | V _{CBO} | 50 | V |
| | Collector to emitter voltage | V _{CEO} | 50 | V |
| | Collector current | I _C | 100 | mA |
| | Total power dissipation | P _T | 150 | mW |
| Overall | Junction temperature | T _j | 150 | °C |
| | Storage temperature | T _{stg} | -55 to +150 | °C |

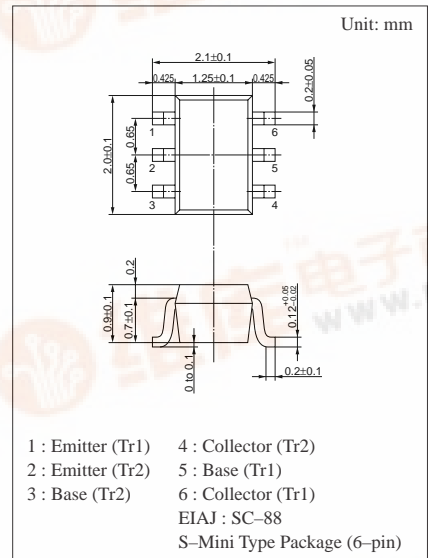

Marking Symbol: CR

Internal Connection

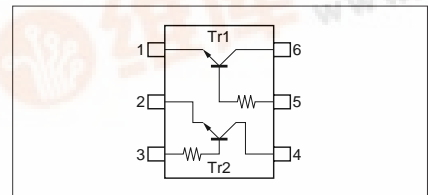


Electrical Characteristics (Ta=25°C)

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|--|---|---|------|------|------|------|
| Collector to base voltage | V _{CBO} | I _C = 10μA, I _E = 0 | 50 | | | V |
| Collector to emitter voltage | V _{CEO} | I _C = 2mA, I _B = 0 | 50 | | | V |
| Collector cutoff current | I _{CBO} | V _{CB} = 50V, I _E = 0 | | | 0.1 | μA |
| | I _{CEO} | V _{CE} = 50V, I _B = 0 | | | 0.5 | μA |
| Emitter cutoff current | I _{EBO} | V _{EB} = 6V, I _C = 0 | | | 0.01 | mA |
| Forward current transfer ratio | h _{FE} | V _{CE} = 10V, I _C = 5mA | 160 | | 460 | |
| Forward current transfer h _{FE} ratio | h _{FE} (small/large) ^{*1} | V _{CE} = 10V, I _C = 5mA | 0.5 | 0.99 | | |
| Collector to emitter saturation voltage | V _{CE(sat)} | I _C = 10mA, I _B = 0.3mA | | | 0.25 | V |
| Output voltage high level | V _{OH} | V _{CC} = 5V, V _B = 0.5V, R _L = 1kΩ | 4.9 | | | V |
| Output voltage low level | V _{OL} | V _{CC} = 5V, V _B = 2.5V, R _L = 1kΩ | | | 0.2 | V |
| Transition frequency | f _T | V _{CB} = 10V, I _E = -2mA, f = 200MHz | | 150 | | MHz |
| Input resistance | R _I | | -30% | 47 | +30% | kΩ |


*1 Ratio between 2 elements




$P_T - T_a$

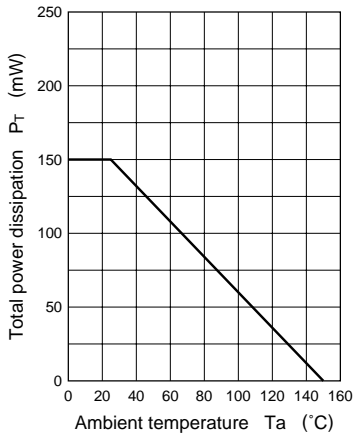


$I_C - V_{CE}$

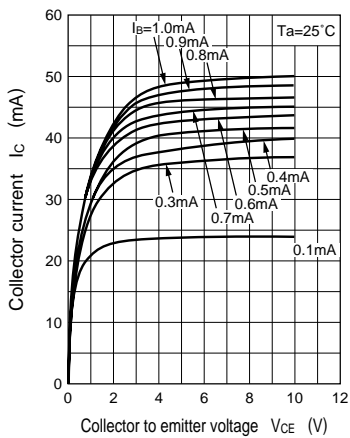


$V_{CE(sat)} - I_C$

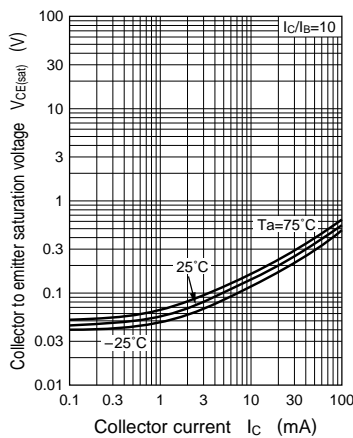


$h_{FE} - I_C$

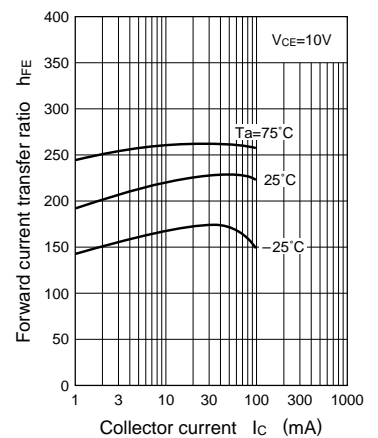

$C_{ob} - V_{CB}$

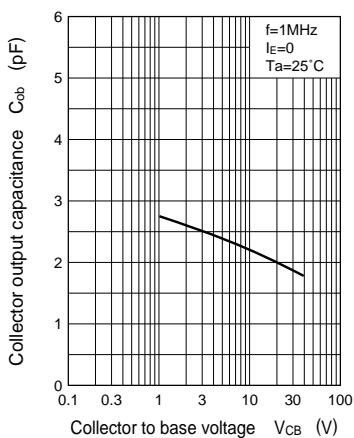

$I_O - V_{IN}$

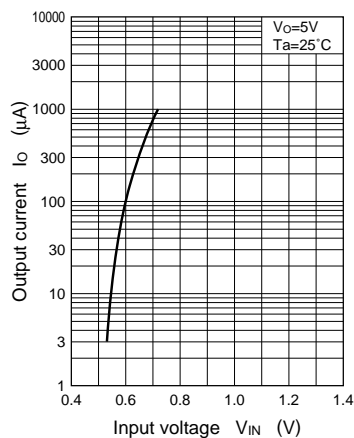

$V_{IN} - I_O$

