

## Composite Transistors

**XP6212**

## Silicon NPN epitaxial planer transistor

For switching/digital circuits

**Features**

- Two elements incorporated into one package.  
(Transistors with built-in resistor)
- Reduction of the mounting area and assembly cost by one half.

**Basic Part Number of Element**


- UN1212 × 2 elements

**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Ratings	Unit
Rating of element	V <sub>CBO</sub>	50	V
	V <sub>CEO</sub>	50	V
	I <sub>C</sub>	100	mA
Overall	P <sub>T</sub>	150	mW
	T <sub>j</sub>	150	°C
	T <sub>stg</sub>	-55 to +150	°C


**Electrical Characteristics (Ta=25°C)**

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector to base voltage	V <sub>CBO</sub>	I <sub>C</sub> = 10µA, I <sub>E</sub> = 0	50			V
Collector to emitter voltage	V <sub>CEO</sub>	I <sub>C</sub> = 2mA, I <sub>B</sub> = 0	50			V
Collector cutoff current	I <sub>CBO</sub>	V <sub>CB</sub> = 50V, I <sub>E</sub> = 0			0.1	µA
	I <sub>CEO</sub>	V <sub>CE</sub> = 50V, I <sub>B</sub> = 0			0.5	µA
Emitter cutoff current	I <sub>EBO</sub>	V <sub>EB</sub> = 6V, I <sub>C</sub> = 0			0.2	mA
Forward current transfer ratio	h <sub>FE</sub>	V <sub>CE</sub> = 10V, I <sub>C</sub> = 5mA	60			
Forward current transfer h <sub>FE</sub> ratio	h <sub>FE</sub> (small/large) <sup>*</sup>	V <sub>CE</sub> = 10V, I <sub>C</sub> = 5mA	0.5	0.99		
Collector to emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = 10mA, I <sub>B</sub> = 0.3mA			0.25	V
Output voltage high level	V <sub>OH</sub>	V <sub>CC</sub> = 5V, V <sub>B</sub> = 0.5V, R <sub>L</sub> = 1kΩ	4.9			V
Output voltage low level	V <sub>OL</sub>	V <sub>CC</sub> = 5V, V <sub>B</sub> = 2.5V, R <sub>L</sub> = 1kΩ			0.2	V
Transition frequency	f <sub>T</sub>	V <sub>CB</sub> = 10V, I <sub>E</sub> = -2mA, f = 200MHz		150		MHz
Input resistance	R <sub>I</sub>		-30%	22	+30%	kΩ
Resistance ratio	R <sub>I</sub> /R <sub>2</sub>		0.8	1.0	1.2	

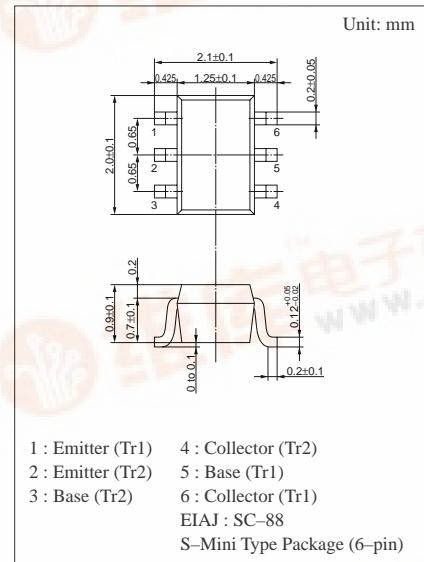

Marking Symbol: 8V


## Internal Connection

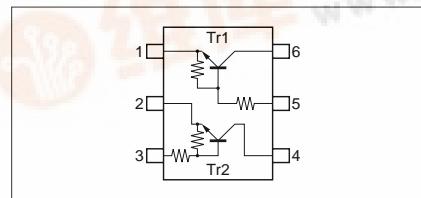


# Composite Transistors

XP6212


$P_T$  — Ta

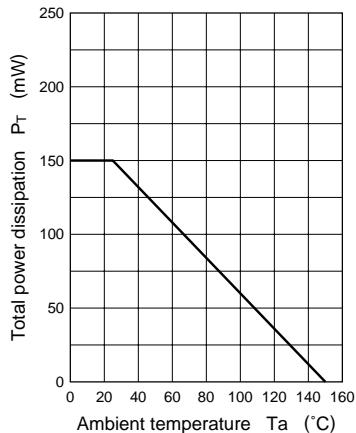


$I_C$  —  $V_{CE}$

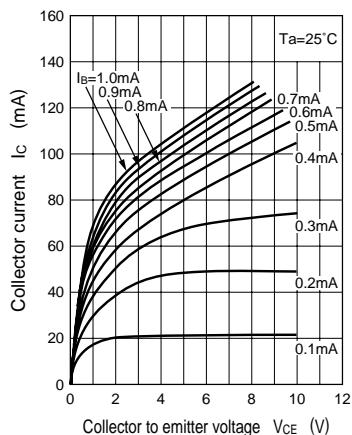


$V_{CE(sat)}$  —  $I_C$

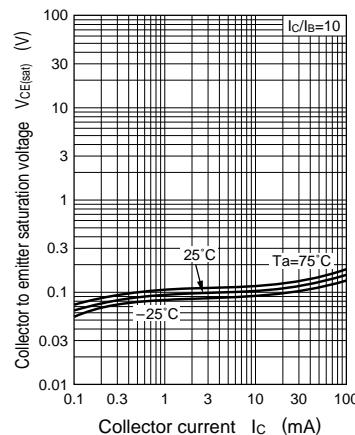


$h_{FE}$  —  $I_C$

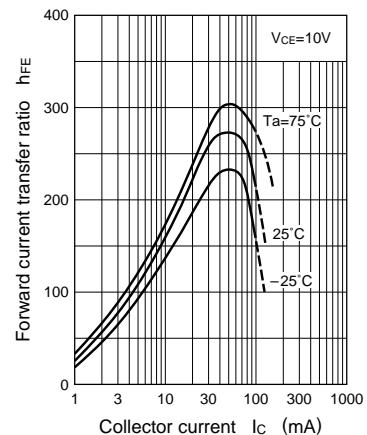

$C_{ob}$  —  $V_{CB}$

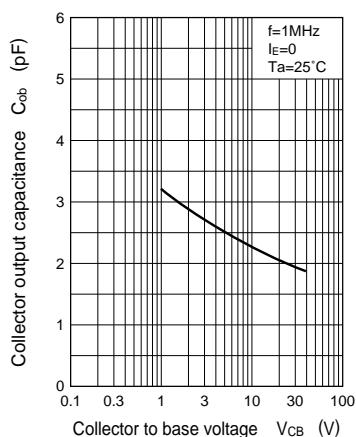

$I_O$  —  $V_{IN}$

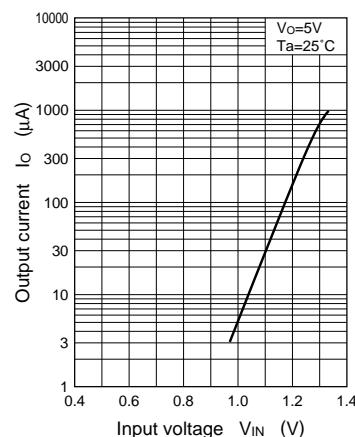

$V_{IN}$  —  $I_O$

