

查询ATH26K12-9供应商


# 30Amps

## ATH30

Total Power: 143W  
 Input Voltages: 3.3V, 5V, 12V  
 No. of Outputs: Single

捷多邦, 专业PCB打样工厂, 24小时加急出货

**POLA**  
 Point-of-Load Alliance

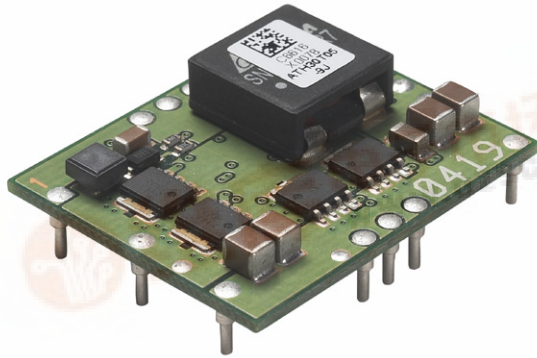

### Special Features

- Point-of-Load Alliance product
- Open frame TH or SMT termination
- Auto-Track™ Sequencing
- Margin Up/Down Controls
- Remote sense compensation
- Output Voltage Adjust (Resistor Programming)
- Under Voltage Lockout
- Pre-Biased start-up
- Output On/Off Inhibit
- -40°C to +85°C Ambient Air Operation
- Non Isolated module

### Environmental

Ambient air operating temperature range:  
 -40°C to +85°C  
 Storage temperature: -40°C to +125°C  
 Demonstrated MTBF: 3.9M Hrs

### Safety

UL, cUL 60950 Recognition  
 EN 60950 though TUV or VDE (Pending)

### Electrical Specs

#### Input

Input Range 3.0 - 3.6V  
 4.5 - 5.5V  
 10.8 - 13.2V

Under Voltage Lockout with hysteresis  
 Efficiency up to 94%

#### Output

Overall Regulation 1% of  $V_o$  Typ  
 Noise/Ripple 40mV Typ (2.5 $V_o$  and below)  
 1%  $V_o$  Typ ( $V_o > 2.5V$ )  
 Remote sense Up to 300mV max  
 Transient Response 100mV typical for 3.3 $V_o$   
 for 50% to 100%  $I_{O,MAX}$  step change  
 70us recovery time ( $C_o = 330\mu F$ )  
 Over Current Protection 155%  $I_{O,MAX}$  typical (autorecovery)

#### Control

Inhibit Control Negative Logic  
 (OPEN = Normal Operation)  
 (GROUND = Function Active)  
 Output Voltage Adjust See output range on page 2  
 Output Margin  $\pm 5\% V_{O,NOM}$   
 Output Auto-Track™ (See Note 5)

Specifications subject to change without notice



**AMERICAS**

5810 Van Allen Way  
 Carlsbad, CA 92008  
 Telephone: 760-930-4600  
 Facsimile: 760-930-0698

**EUROPE**

Astec House, Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX, UK  
 Telephone: 44 (1384) 842-211  
 Facsimile: 44 (1384) 843-355

**ASIA**

Units 2111-2116, Level 21  
 Tower1, Metroplaza  
 223, Hing Fong Road  
 Fwai Fong, New Territories  
 Hong Kong  
 Telephone: 852-2437-9662  
 Facsimile: 852-2402-4426



## Ordering Information

Input Voltage	Output Voltage	Output <sup>2</sup> Current	Efficiency <sup>3</sup>	Model Number
3.0V to 3.6V	0.8V to 2.5V	30A	93%	ATH30T033- 9(S)(J)
4.5V to 5.5V	0.8V to 3.6V	30A	94%	ATH30T05 - 9(S)(J)
10.8V to 13.2V	1.2V to 5.5V	26A	94%	ATH26K12 - 9(S)(J)

**OPTIONS:**

- “-9J” - Output Trim, TH termination, Tray Packaging
- “-9SJ” - Output Trim, SMT termination, Tray Packaging


## Pin Assignments

**Single Output**

	PINS
GND	: 1, 3
Vin	: 2
Inhibit	: 4
Vo Adjust	: 5
Vo Sense	: 6
Vout	: 8, 9
GND	: 7, 10
Track	: 11
Margin Down	: 12
Margin Up	: 13

**Notes:**

- Nominal values apply with sense pins connected to +Vout and Ground Return with other control pins unconnected.
- Output derating applies at elevated ambient temperature.
- Typical efficiency taken at 20A load, 2.5V output (3.3Vin device); 20A load, 3.3V output (5Vin device); 18A load, 5V output (12Vin device).
- Mechanical Dimensions are nominal values.
- Consult the technical reference notes when available.
- Auto-Track™ is a trademark of Texas Instruments.
- Specification subject to change without notice.

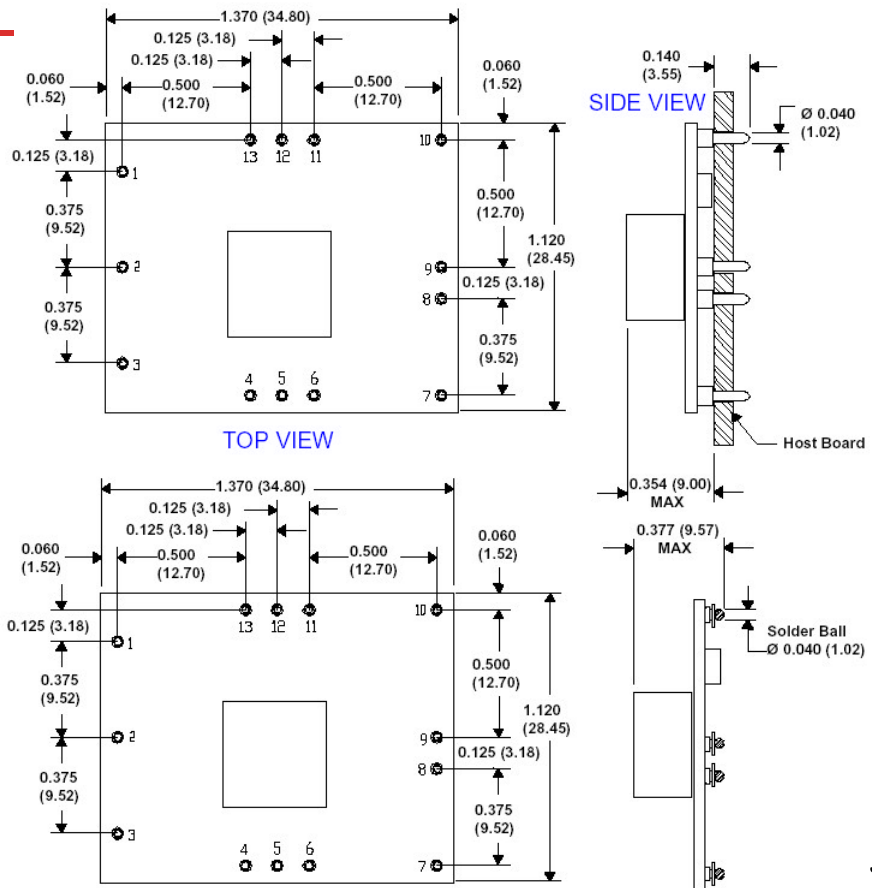

Through-hole and SMT Outline [in (mm)]

Astec reserves the right to make changes to the information contained herein without notice and assumes no liability as a result of its use or application. (REV02: OCTOBER 21, 2004)

