

MOS FIELD EFFECT TRANSISTORS 2SK2365/2SK2366

SWITCHING N-CHANNEL POWER MOS FET INDUSTRIAL USE

DESCRIPTION

The 2SK2365, 2SK2365-Z/2SK2366, 2SK2366-Z is N-Channel MOS Field Effect Transistor designed for high voltage switching applications.

FEATURES

· Low On-Resistance


2SK2365: $R_{DS(on)} = 0.5 \Omega$ (Vgs = 10 V, ID = 5.0 A) 2SK2366: $R_{DS(on)} = 0.6 \Omega$ (Vgs = 10 V, ID = 5.0 A)

- Low Ciss Ciss = 1 600 pF TYP.
- High Avalanche Capability Ratings
- · Isolate TO-220 Package

ABSOLUTE MAXIMUM RATINGS (TA = 25 °C)

VDSS	450/500	V
Vgss	±30	V
ID(DC)	±10	Α
ID(pulse)	± 40	Α
P _{T1}	75	W
P _{T2}	1.5	W
Tch	150	°C
T _{stg} -	-55 to +150	°C
las	10	Α
Eas	143	mJ
	VGSS ID(DC) ID(pulse) PT1 PT2 Tch Tstg IAS	VGSS ±30 ID(DC) ±10 ID(pulse) ±40 PT1 75 PT2 1.5 Tch 150 Tstg -55 to +150 IAS 10

- * PW \leq 10 μ s, Duty Cycle \leq 1 %
- ** Starting T_{ch} = 25 °C, R_G = 25 Ω , V_{GS} = 20 V \rightarrow 0

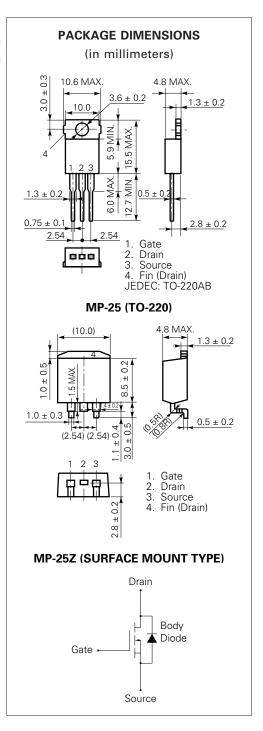




ELECTRICAL (TA = 25 °C)


CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS	
Drain to Source On-State Resistance	R _{DS(on)}		0.4	0.5	Ω	V _{GS} = 10 V	2SK2365
			0.5	0.6		ID = 5.0 A	2SK2366
Gate to Source Cutoff Voltage	V _{GS(off)}	2.5		3.5	V	V _{DS} = 10 V, I _D = 1 mA	
Forward Transfer Admittance	l yfs l	4.0			S	V _{DS} = 10 V, I _D = 5.0 A	
Drain Leakage Current	IDSS			100	μΑ	V _{DS} = V _{DSS} , V _{GS} = 0	
Gate to Source Leakage Current	Igss			±100	nA	$V_{GS} = \pm 30 \text{ V, } V_{DS} = 0$	
Input Capacitance	Ciss		1 600		pF	V _{DS} = 10 V	
Output Capacitance	Coss		310		pF	V _G S = 0	
Reverse Transfer Capacitance	Crss		30		pF	f = 1 MHz	
Turn-On Delay Time	td(on)		30		ns	ID = 5.0 A	
Rise Time	tr		20		ns	Vgs = 10 V	
Turn-Off Delay Time	td(off)		80		ns	$V_{DD} = 150 \text{ V}$	
Fall Time	tf		20		ns	$R_G = 10 \Omega R_L$	= 30 Ω
Total Gate Charge	QG		42		nC	ID = 10 A	
Gate to Source Charge	Qgs		10		nC	$V_{DD} = 400 \text{ V}$	
Gate to Drain Charge	Q _{GD}		20		nC	V _{GS} = 10 V	
Body Diode Forward Voltage	V _{F(S-D)}		1.0		V	IF = 10 A, VGS	= 0
Reverse Recovery Time	trr		350		ns	IF = 10 A, VGS	= 0
Reverse Recovery Charge	Qrr		1.5		μC	di/dt = 50 A/μs	5

Test Circuit 1 Avalanche Capability


$R_{G} = 25 \Omega$ $PG \longrightarrow 50 \Omega$ $V_{GS} = 20 - 0 V$



Test Circuit 2 Switching Time

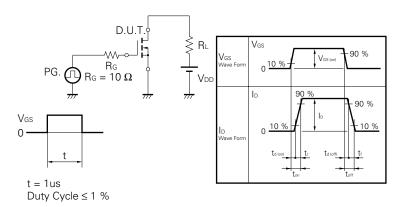


Test Circuit 3 Gate Charge




The application circuits and their parameters are for references only and are not intended for use in actual design-in's.


查询"TYRICA6"(如本的CTERISTICS (TA = 25 °C)

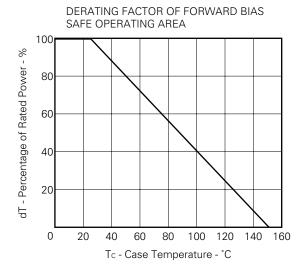


FORWARD BIAS SAFE OPERATING AREA

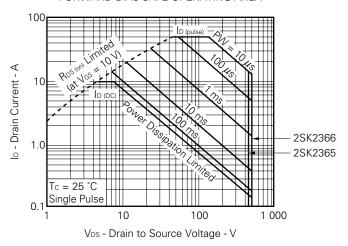


DRAIN CURRENT vs. GATE TO SOURCE VOLTAGE

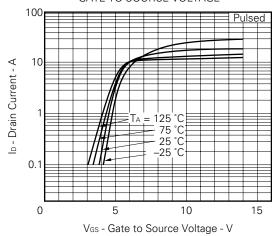


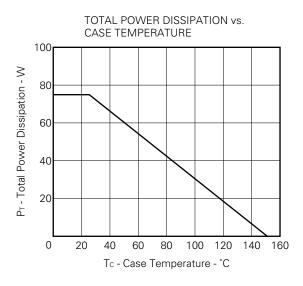


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

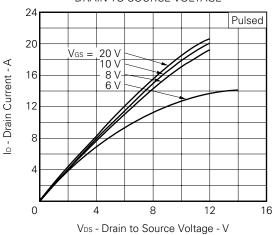


查询"2SK2365"供应商



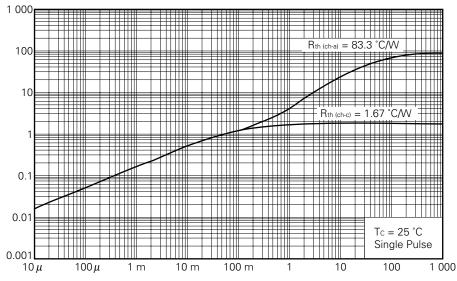


PW - Pulse Width - s


FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT

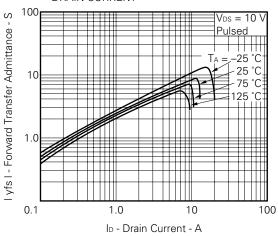


DRAIN TO SOURCE ON-STATE RESISTANCE vs. GATE TO SOURCE VOLTAGE

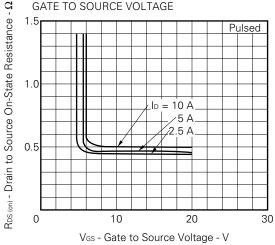

DRAIN TO SOURCE ON-STATE

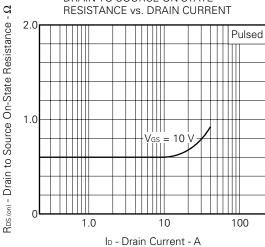


GATE TO SOURCE CUTOFF VOLTAGE vs. CHANNEL TEMPERATURE

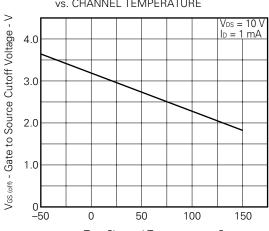


 T_ch - Channel Temperature - C


查询"2SK2365"供应商 RCE ON-STATE RESISTANCE vs. CHANNEL TEMPERATURE

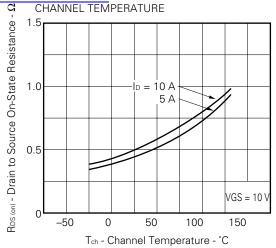


SOURCE TO DRAIN DIODE FORWARD VOLTAGE

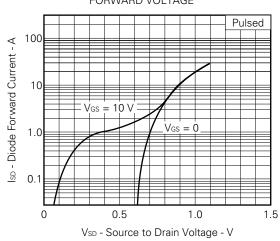


O CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE

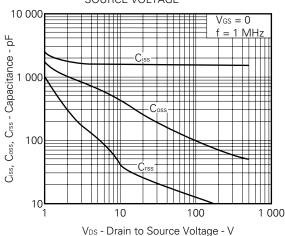


SWITCHING CHARACTERISTICS

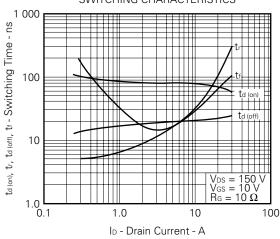


REVERSE RECOVERY TIME vs.

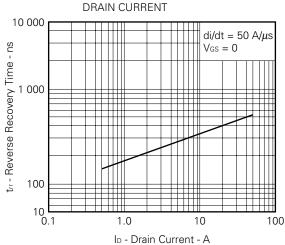


DYNAMIC INPUT/OUTPUT CHARACTERISTICS

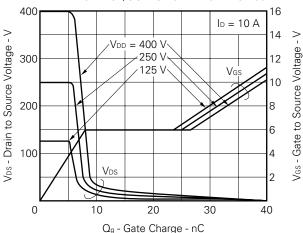

查询"28K2365"供应商 E ENERGY vs.

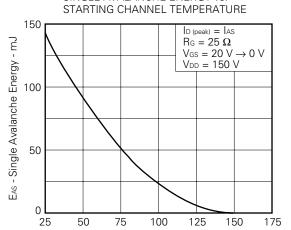

SINGLE AVALANCHE CURRENT vs. INDUCTIVE LOAD

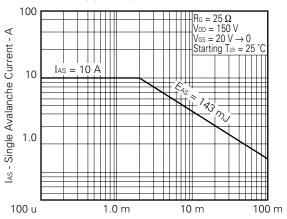



查询"BEFERENC其应商

Document Name	Document No.
NEC semiconductor device reliability/quality control system.	TEI-1202
Quality grade on NEC semiconductor devices.	IEI-1209
Semiconductor device mounting technology manual.	IEI-1207
Semiconductor device package manual.	IEI-1213
Guide to quality assurance for semiconductor devices.	MEI-1202
Semiconductor selection guide.	MF-1134
Power MOS FET features and application switching power supply.	TEA-1034
Application circuits using Power MOS FET.	TEA-1035
Safe operating area of Power MOS FET.	TEA-1037

The diode connected between the gate and source of the transistor serves as a protector against ESD. When this device is actually used, an additional protection circuit is externally required if a voltage exceeding the rated voltage may be applied to this device.

7



[**查证何②\$**K2365"供应商

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.