
查询"B84143B1600S081"供应商

EMC filters

3-line filters for converters and power electronics Rated current 180 to 1600 A

Series/Type: Date: B84143B*S080, S081 January 2006

EPCOS





3-line filters

for converters and power electronics

Power line filters for 3-phase systems Rated voltage 520/300 and 760/440 V AC Rated current 180 to 1600 A

Construction

- 3-line filter
- Metal case

Features

- Optimized leakage current
- Easy to install
- Very compact design
- Optimized for operation under full load
- Low weight
- Design complies with
- EN 133200, UL 1283, CSA C22.2 No.8
- UL, cUL approval 🔊 🖓

Applications

- Frequency converters for motor drives
- Wind farms
- Power supplies

Terminals

Busbars

Marking

Marking on component: Manufacturer's logo, ordering code, frequency, rated voltage, rated current, rated temperature, climatic category, date code

Minimum marking on packaging: Manufacturer's logo, ordering code



B84143B*S080, S081






B84143B*S080, S081

3-line filters

for converters and power electronics

Typical circuit diagram

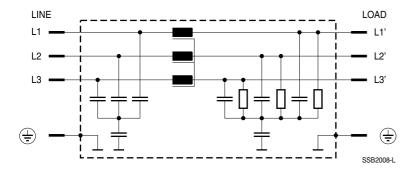

Rated voltage V_R 520/300 V AC, 50/60 Hz Type S080: Type S081: 760/440 V AC, 50/60 Hz (Suitable for IT mains supply up to 560/320 V. See also Chapter "General", section 7.4) Referred to 40 °C ambient temperature Rated current I_R (180 A filter at 60 °C) Test voltage V_{test} Type ... S080: 2240 V DC, 2 s (line/line) 2720 V DC, 2 s (lines/case) Type ... S081: 3270 V DC, 2 s (line/line) 2890 V DC, 2 s (lines/case) $1.5 \cdot I_R$ for 3 min per hour or Overload capability (thermal) 2.5 · I_R for 30 s per hour Type ...S080: at 520 V AC, 50 Hz Leakage current Ileak Type ... S081: at 760 V AC, 50 Hz Climatic category (IEC 60068-1) 25/100/21 (-25 °C/+100 °C/21 days damp heat test) UL 1283; CSA C22.2 No.8 Approvals (Type S080: 500/290 V; Type S081: 600/350 V)

Technical data and measuring conditions





3-line filters	B84143B*S080, S081
for converters and power electronics	

Characteristics and ordering codes


V _R AC	I _R A	l _{leak} mA	R _{typ} μΩ	Approx. weight kg	Ordering code	Approvals	
V						97	c 91
Type S080						500/290 V	
520/300	180 ¹⁾	< 21	110	5.0	B84143B0180S080	×	×
	250	< 21	110	5.0	B84143B0250S080	×	×
	320	< 21	51	7.2	B84143B0320S080	×	×
	400	< 21	48	7.5	B84143B0400S080	×	×
	600	< 21	43	7.8	B84143B0600S080	×	×
	1000	< 40	29	18.5	B84143B1000S080	×	×
	1600	< 40	22	24.5	B84143B1600S080	-	-
Type S081 ²)					600/350 V		
760/440	180 ¹⁾	< 31	110	5.0	B84143B0180S081	×	×
	250	< 31	110	5.0	B84143B0250S081	×	×
	320	< 31	51	7.2	B84143B0320S081	×	×
	400	< 31	48	7.5	B84143B0400S081	×	×
	600	< 31	43	7.8	B84143B0600S081	×	×
	1000	< 58	29	18.5	B84143B1000S081	×	×
	1600	< 58	22	24.5	B84143B1600S081	-	-


 \times = approval granted

1) B84143B0180S080 and B84143B0180S081 referred to 60 °C ambient temperature


Please read Cautions and warnings and Important notes at the end of this document.

01/06 5





B84143B0320S08*, B84143B0400S08* (320 A, 400 A)



Dimensional drawings B84143B0180S08*, B84143B0250S08* (180 A, 250 A)

for converters and power electronics

3-line filters

EPCOS

B84143B*S080, S081



查询"B84143B1600S081"供应商




B84143B*S080, S081


B84143B0600S08* (600 A)

3-line filters

for converters and power electronics



B84143B1000S08* (1000 A)

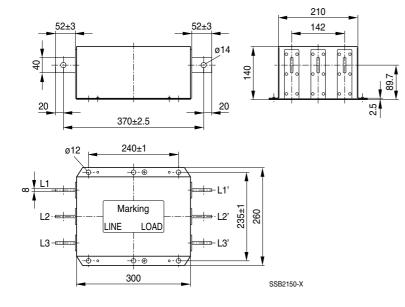

Please read *Cautions and warnings* and *Important notes* at the end of this document.


6 01/06





3-line filters

for converters and power electronics

B84143B1600S08* (1600 A)











3-line filters

-

for converters and power electronics

Insertion loss (typical values at $Z = 50 \Omega$)

 unsymmetrical, adjacent branches terminated
 common mode, all branches in parallel (asymmetrical)
 differential mode (symmetrical)

Filters for 180 A and 250 A

Filters for 320 A and 400 A -----

B84143B0320S08*

- B84143B0400S08

TIM

100

dB

80

60

40


α

B84143B*S080, S081


SSB2004-N

Hz 10⁸


f








Please read Cautions and warnings and Important notes at the end of this document.











B84143B*S080, S081


for converters and power electronics

Insertion loss (typical values at $Z = 50 \Omega$)

unsymmetrical, adjacent branches terminated common mode, all branches in parallel (asymmetrical) differential mode (symmetrical)

Filters for 1600 A

3-line filters





9



EMC filters

Cautions and warnings

Important information

Please read all safety and warning notes carefully before installing the EMC filter and putting it into operation (see \triangle). The same applies to the warning signs on the filter. Please ensure that the signs are not removed nor their legibility impaired by external influences.

Death, serious bodily injury and substantial material damage to equipment may occur if the appropriate safety measures are not carried out or the warnings in the text are not observed.

Using according to the terms

The EMC filters may be used only for their intended application within the specified values in lowvoltage networks in compliance with the instructions given in the data sheets and the data book. The conditions at the place of application must comply with all specifications for the filter used.

A Warnings

- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. EMC filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off.
- The protective earth connections shall be the first to be made when the EMC filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective-earth connection must be observed.
- Impermissible overloading of the EMC filter, such as impermissible voltages at higher frequencies that may cause resonances etc. can lead to destruction of the filter housing.
- EMC filters must be protected in the application against impermissible exceeding of the rated currents by suitable overcurrent protective.



EMC filters

Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous"). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.

- 6. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- The trade names EPCOS, EPCOS-Jones, Baoke, CeraDiode, CSSP, MLSC, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, UltraCap, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download Daily Updated Database 100% Free Datasheet Search Site 100% Free IC Replacement Search Site Convenient Electronic Dictionary Fast Search System www.EEworld.com.cn

All Datasheets Cannot Be Modified Without Permission

Copyright © Each Manufacturing Company