



3-line filters for converters and power electronics

760/440 V, 50/60 Hz, 25A to 180A, 40 °C

Ordering code:

B84143A0025...A0180R021

Date:

2008-11-26

Version:

04



3-line filters

B84143A0025...A0180R021

for converters and power electronics

Construction

- 3-line filter
- Metal case

Features

- High insertion loss
- Low leakage current
- Easy to install
- Degree of protection IP 20 ¹⁾
- Space-saving design
- Design complies with IEC / EN 60939, UL 1283, CSA 22.2 No.8
- Optimized for long motor cables and operation under full load
- UL and cUL approval

Applications

- Frequency converters for motor drives, e.g.
 - elevators
 - pumps
 - traction systems
 - conveyor systems
 - HVAC systems (heating, ventilation and air conditioning)
- Wind farms
- Power supplies

Terminals

- Finger-save terminal blocks


Marking

- Marking on component: manufacturer's logo, ordering code, rated voltage, rated current, rated temperature, climatic category, date code



3-line filters
for converters and power electronics
B84143A0025...A0180R021

Typical circuit diagram

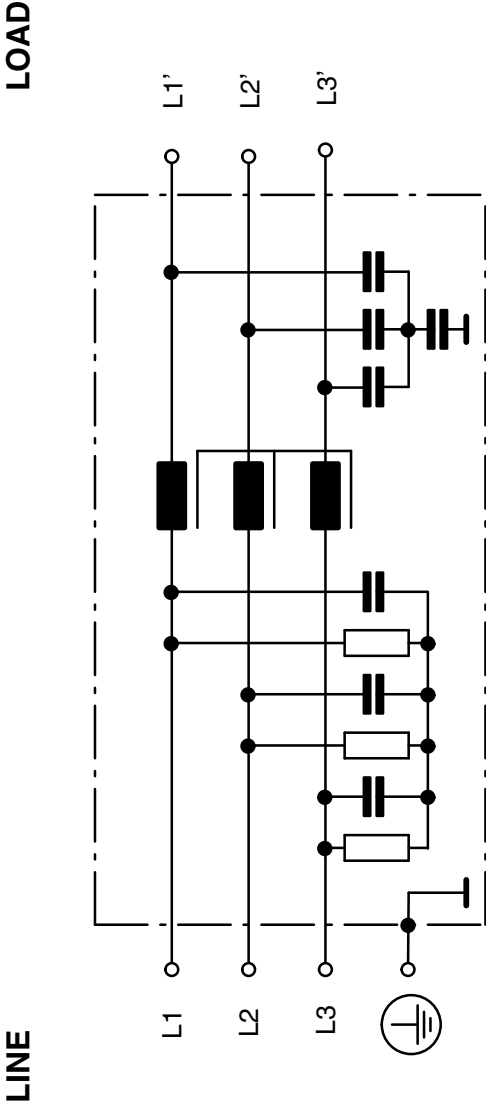

Technical data and measuring conditions

Rated voltage	V_R	760/440	V AC
Rated frequency	f_R	50/60	Hz
Test voltage line to line for 2 s	V_{test}	3270	V DC
Test voltage line to case for 2 s	V_{test}	3000	V DC
Rated temperature	T_R	40	°C
Overload capability (thermal) for 3 min per hour or for 30 s per hour		$1.5 \times I_R$ $2.5 \times I_R$ at 690	V AC, 50Hz
leakage current I_{leak}			
Climatic category (IEC 60068-1)		25/100/21	



3-line filters

B84143A0025...A0180R021

for converters and power electronics

[查询"B84143A0025R021"供应商](#)


Characteristics and ordering codes

I _R	Terminal cross section	I _{leak} ²⁾	R _{typ}	Approx. weight	Ordering code	Approvals		
A	mm ²	mA	mΩ	kg				
25	10	< 7	8.0	4	B84143A0025R021	–	X	X
36	10	< 7	3.8	4	B84143A0036R021	–	X	X
50	10	< 12	2.0	4	B84143A0050R021	–	X	X
80	25	< 12	1.0	9.5	B84143A0080R021	–	X	X
120	50	< 12	0.75	10	B84143A0120R021	–	X	X
150	50	< 12	0.4	10	B84143A0150R021	–	X	X
180	95	< 12	0.4	13	B84143A0180R021	–	X	X

X = approval granted




Dimensional drawings
B84143A0025R021; B84143A0050R021

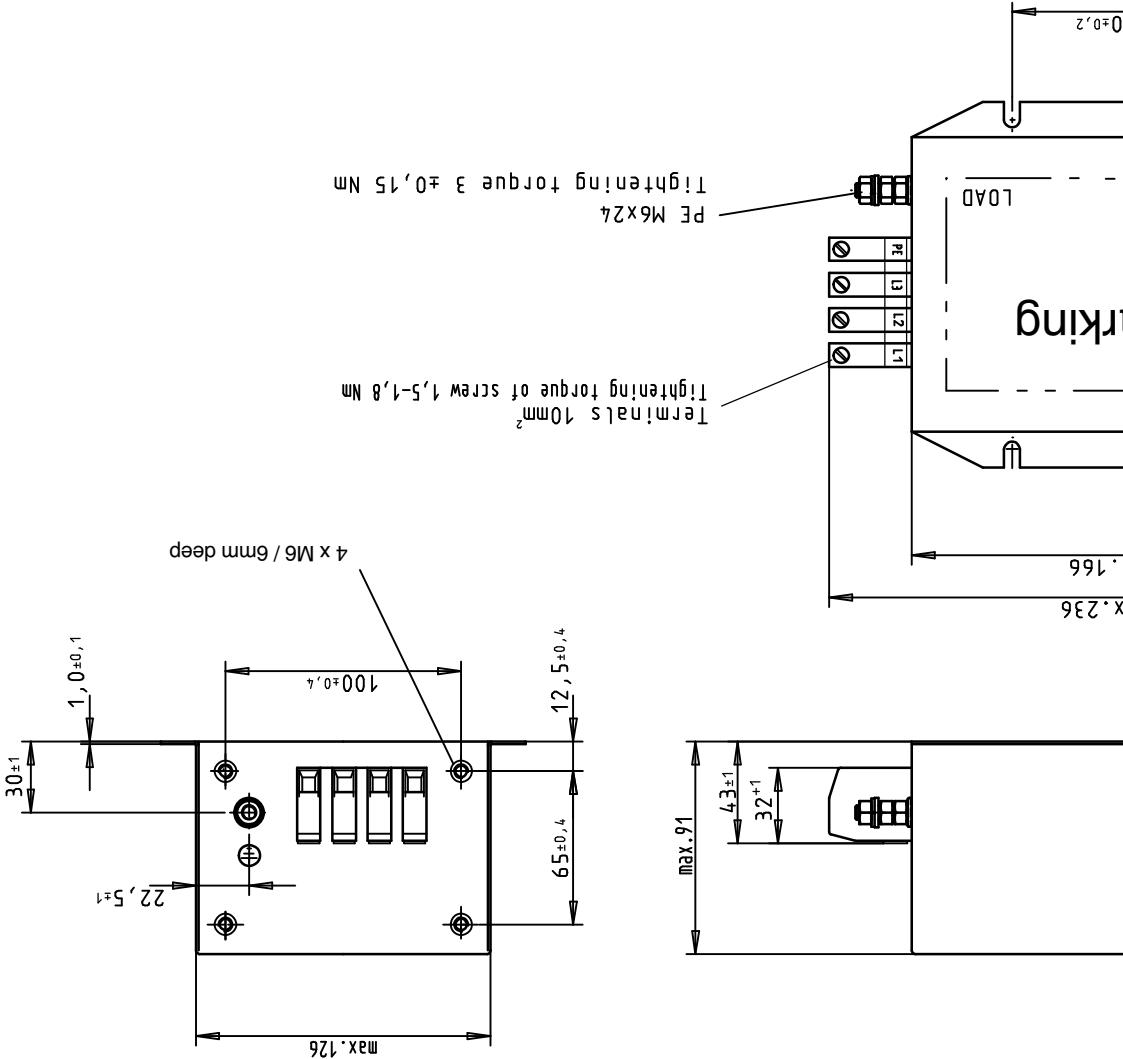




Dimensional drawings
B84143A0080R021

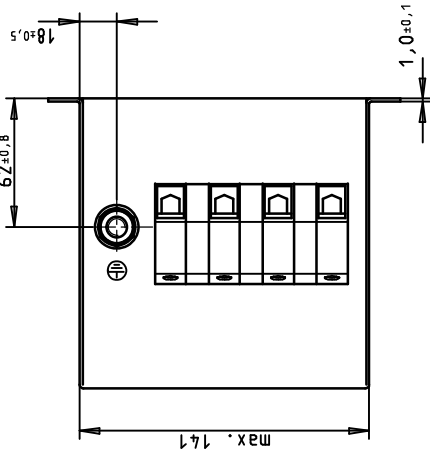


Terminals 25mm²
Tightening torque of screw 4-4,5 Nm

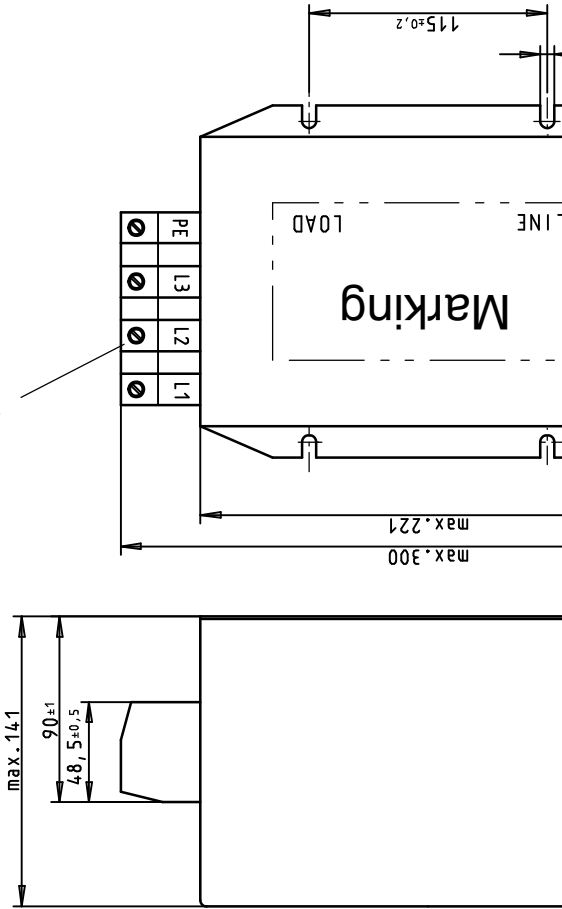




Dimensional drawings
B84143A0120...A0150R021

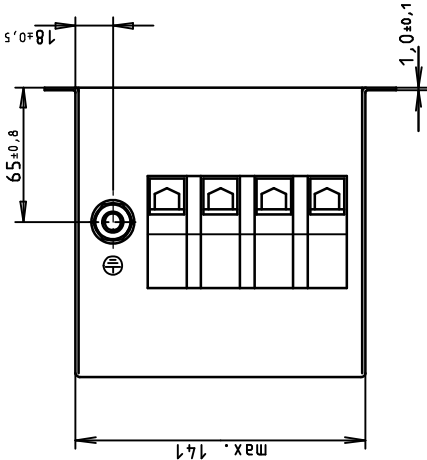


Terminals 50mm²
Tightening torque of screw 6-8 Nm

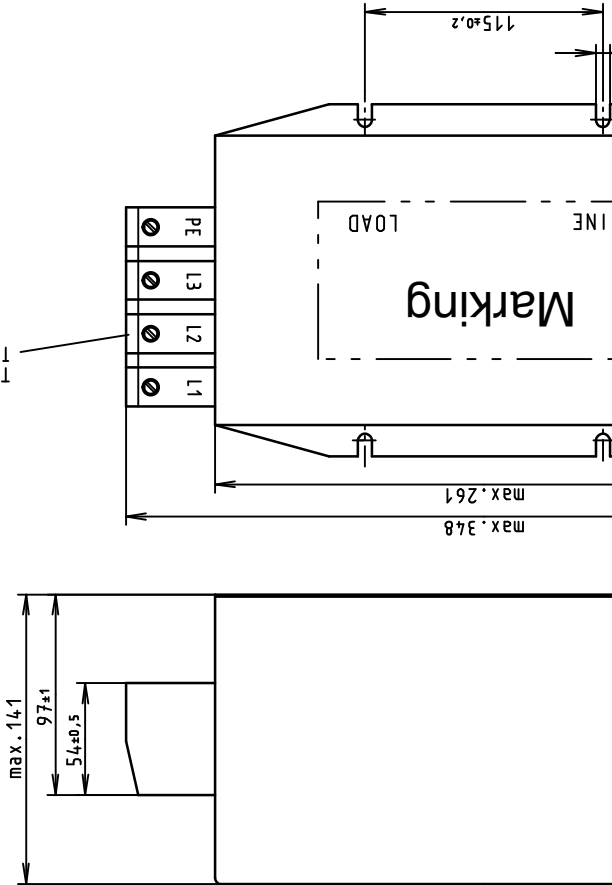



Dimensional drawings
B84143A0180R021


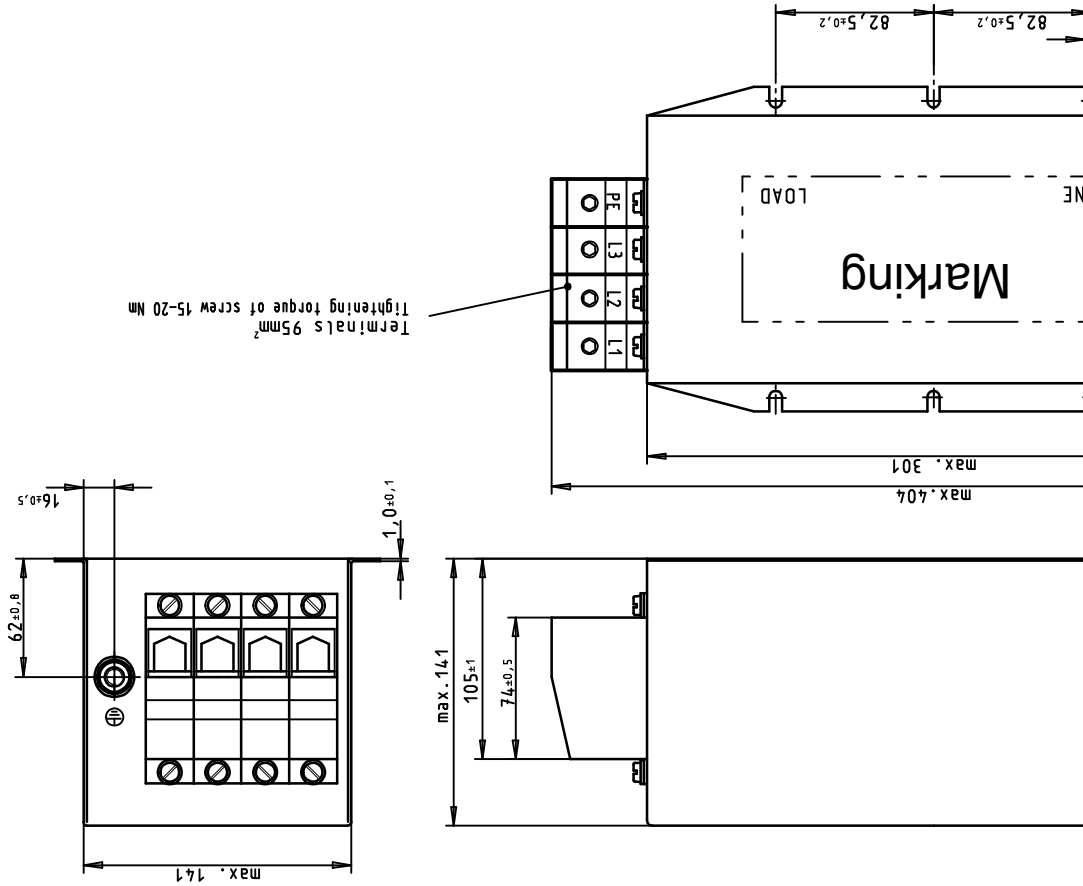




3-line filters **B84143A0025...A0180R021**
for converters and power electronics

Insertion loss (typical values at $Z = 50 \Omega$)

- unsymmetrical, adjacent branches terminated
- - - common mode, all branches in parallel (asymmetrical)
- - - differential mode (symmetrical)

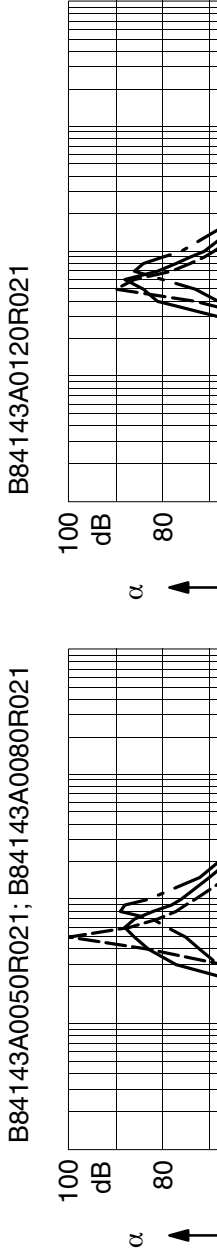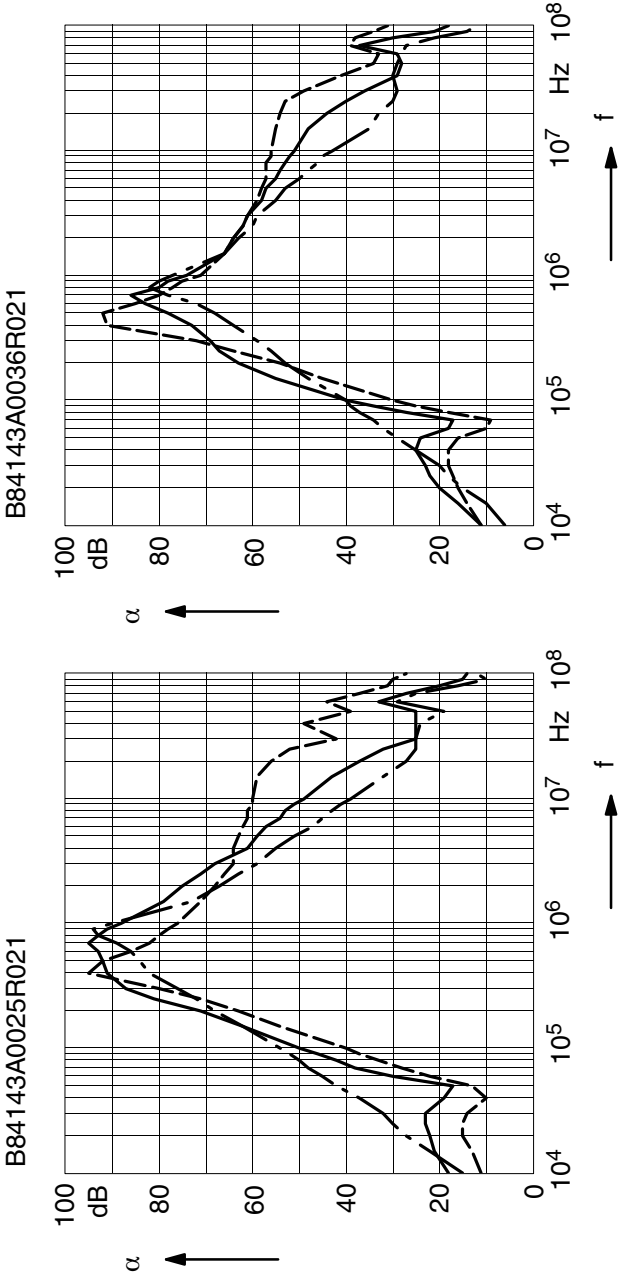




3-line filters
for converters and power electronics
B84143A0025...A0180R021

Insertion loss (typical values at $Z = 50 \Omega$)

- unsymmetrical, adjacent branches terminated
- - - common mode, all branches in parallel (asymmetrical)
- - - differential mode (symmetrical)

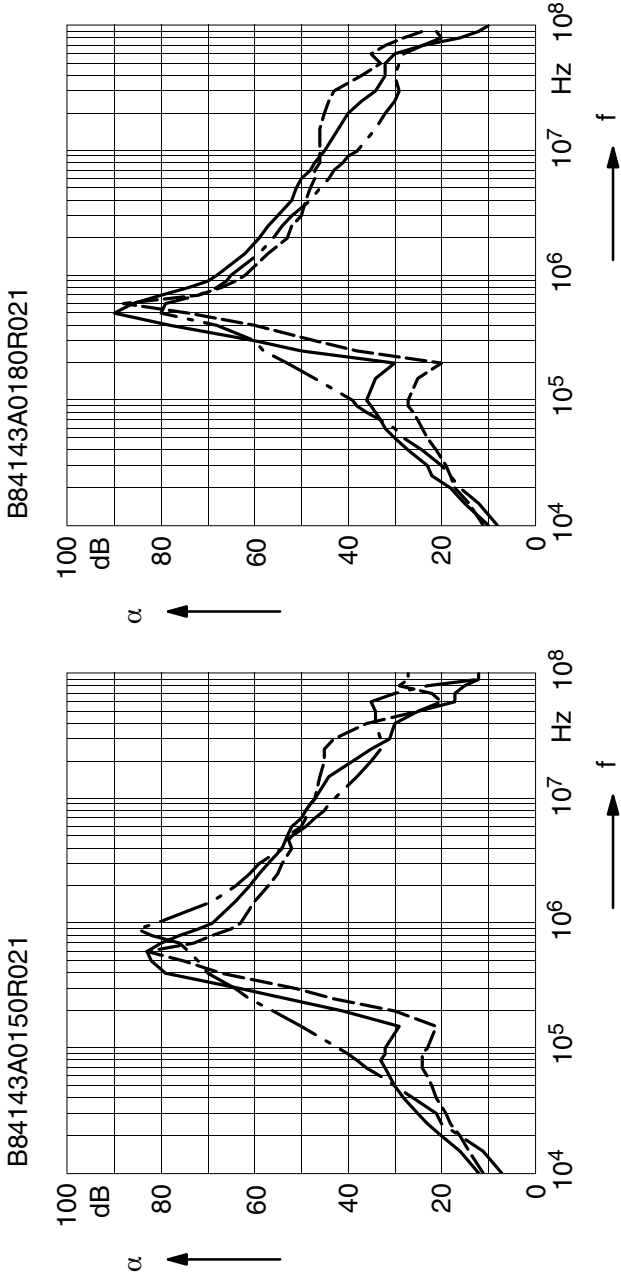

Caution and warnings

- Please note the advices in our data book "EMC Filters" (latest edition); attention should be paid to the chapter "General safety notes".
- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. EMC filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off.
- The protective earth connections shall be the first to be made when the EMC filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective-earth connection must be observed.
- Impermissible overloading of the EMC filter, such as with circuits able to cause resonances, impermissible voltages at higher frequencies etc. can lead to bodily injury and death as well as cause substantial material damages (e.g. destruction of the filter housing).
- EMC filters must be protected in the application against impermissible exceeding of the rated currents by overcurrent protective.
- In case of leakage currents $> 3.5 \text{ mA}$ you shall mount the PE conductor stationary with the required cross section before beginning of operation and save it against disconnecting. For leakage currents $I_L^{4)} < 10 \text{ mA}$ the PE conductor must have a KU value ³⁾ of 4.5; for leakage currents $I_L \geq 10 \text{ mA}$ the PE conductor must have a KU value of 6.



Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**.

As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.

2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.

3. **The warnings, cautions and product-specific notes must be observed.**

4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.

5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.

The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.

7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DSSP, MiniBlue, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn