

查询A125N50X4供应商
Anaren


捷多邦, 专业PCB打样工厂, 24小时加急出货

Model A125N50X4

RF Power

**ROHS
Compliant**

**Chip Termination
125 Watts, 50Ω**

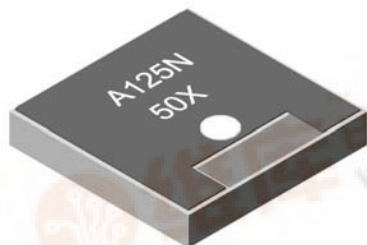

Description

The A125N50X4 is high performance Aluminum Nitride (AlN) chip termination intended as an alternative to Beryllium Oxide (BeO). The termination is well suited to all cellular frequency bands such as; AMPS, GSM, DCS, PCS, PHS and UMTS. The high power handling makes the part ideal for terminating circulators and for use in power combiners. The termination is also RoHS compliant!

General Specifications

Resistive Element	Thick film
Substrate	AlN Ceramic
Terminal Finish	Matte Tin over Nickel Barrier
Operating Temperature	-55 to +150°C (see de rating chart)

Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. **All dimensions in inches.**

Features:


- RoHS Compliant
- 125 Watts
- DC – 4.0 GHz
- AlN Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested
- Small Size

Electrical Specifications

Resistance Value:	50 Ohms, $\pm 2\%$
Power:	125 Watts
Frequency Range:	DC – 4.0 GHz
Return Loss	> 26 dB to 2.7 GHz > 20 dB to 4.0 GHz

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change.**

Outline Drawing


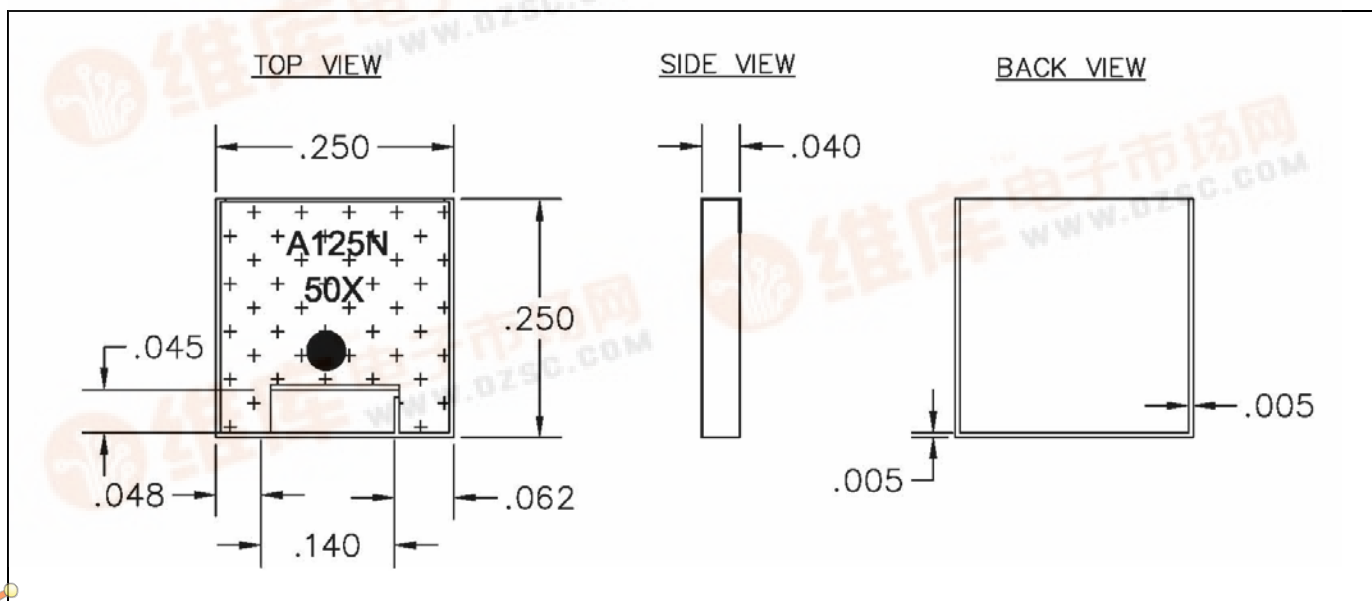


A125N50X4 (097) rev.D pg.1 of 2







Typical Performance:

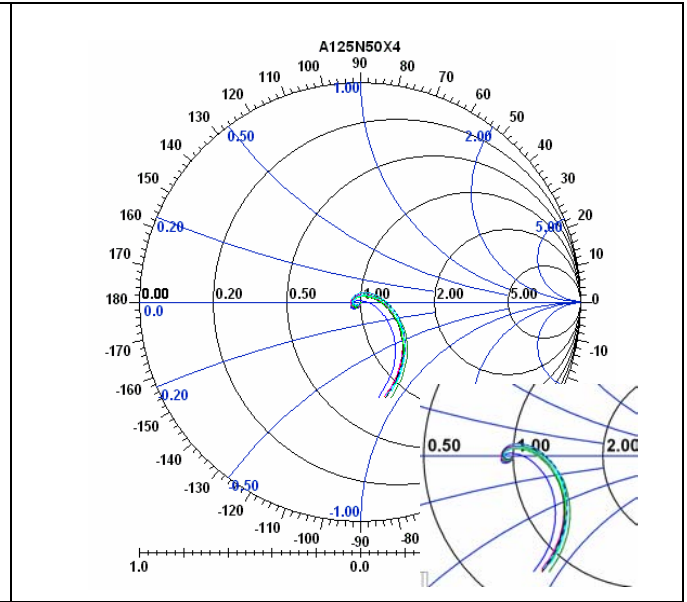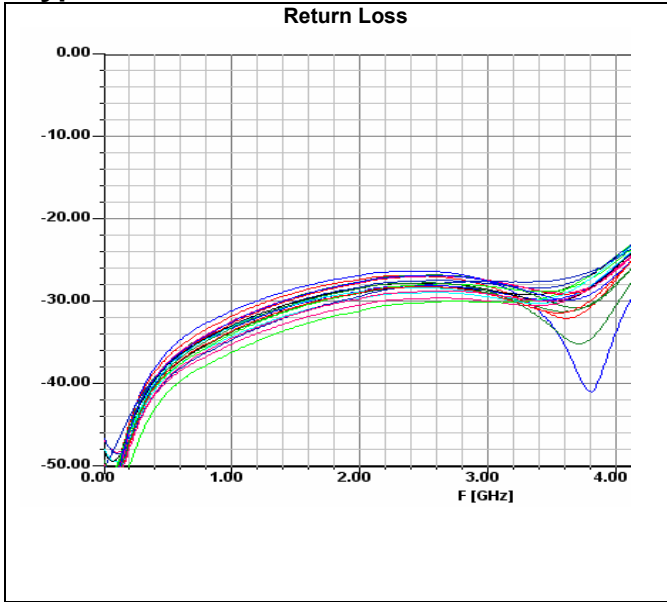

Power De-rating:

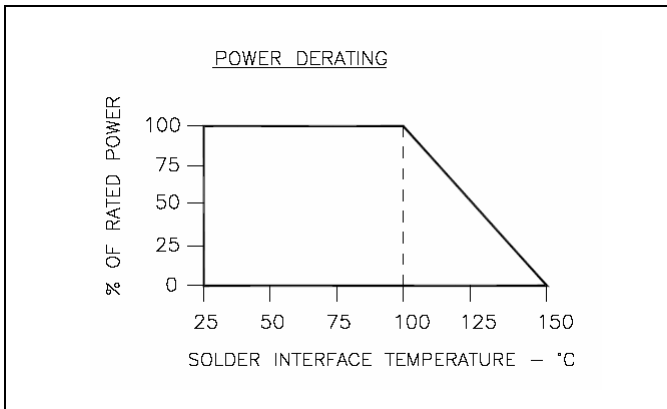

Tape & Reel:

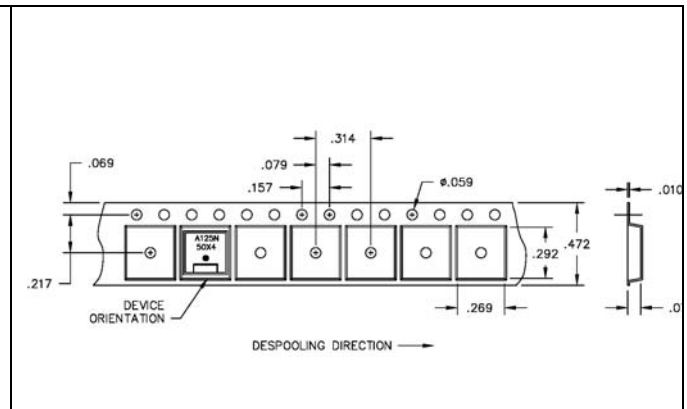

Mounting Footprint and Procedure:

1. MAKE SURE THAT THE DEVICES ARE MOUNTED ON FLAT SURFACES (.001" UNDER THE DEVICE) TO OPTIMIZE THE HEAT TRANSFER.
2. POSITION DEVICE ON MOUNTING SURFACE AND SOLDER IN PLACE USING A LEAD FREE TYPE OR SN96 TYPE SOLDER.
3. SOLDER LEADS IN PLACE USING AN SN96 TYPE SOLDER WITH A CONTROLLED TEMPERATURE IRON (250°C).

