

[查询"PMB6821"供应商](#)

# PMB 6821

SM-Power3 - Highly Integrated Power Management Units for Feature Rich Mobile Devices



SM-Power3 extends the SM-Power family with a new highly integrated power management IC. It is optimized to support mobile devices based upon S-Gold3 and S-Gold3H, with features ranging from EDGE up to 3G and HSDPA.

SM-Power3 is designed for mobile systems composed of digital or mixed signal baseband ICs, analog components, RF transceiver ICs, LCD/TFT graphic displays with backlight, camera, loudspeaker, and USB interface.

SM-Power3 also supports charging for mobile rechargeable batteries like Li-Ion or Li-Polymer. It provides the different supply voltages for the system using highly efficient DC/DC buck and boost converters and linear low-dropout regulators (LDO's).

IN ADDITION, the SM-Power3 generates a power on reset, stand-by voltages, and supports various low power modes.

THE SM-Power3 provides all functions needed for the system power management with a minimized bill of material and size of external components.

## Features

- General
  - Software-controlled charging of Lithium-Ion or Li-Polymer batteries
  - Different low-power modes with very low power consumption
  - Temperature monitoring with built-in over-temperature warning
- Switching converters
  - SD1: Fully integrated high-efficiency step-down converter with dynamic output voltage scaling and PFM low-power mode
  - SD2: Fully integrated high-efficiency step-down converter with PFM low-power mode
  - SU1: 5.6 ... 25 V Step-up converter driving white LED for backlight and flashlight
- Linear Low-Dropout (LDO) regulators
  - 7 General-Purpose LDO's
  - 5 Low-Noise LDO's
  - 3 low-power LDO's
- LED Control
  - 3x PWM-modulated control signal
  - Driver for white LEDs, e.g. for flashlight
  - Support for LEDs connected in series
  - Support for trickle charging LED and indicator LED
- Charger Section
  - Fast charging
  - Constant-current charging (active trickle-charge mode)
  - Pre-charge for deeply discharged batteries (trickle-charge mode)
  - Charging through USB
  - Charging with up to 10 V charger voltage
  - Withstands charger voltages up to 15 V
- Motor Driver
  - Single ended linear controlled vibrator motor driver
  - Optionally PWM controlled
- USB Transceiver 2.0
  - USB 2.0 transceiver
  - Integrated pull-up/pull-down resistors
- Audio Amplifier
  - Battery-driven 700 mW differential audio amplifier capable of driving 8 Ω loudspeakers
  - Two gain stages including overdrive for ringing tones. PSRR @ 4 kHz > 90 dB.
  - Low-power consumption
- Interfaces
  - I<sup>2</sup>C control interface for device configuration
  - Hardware-controlled LDO and SD1 voltage setting
  - Power-On reset generation. Interrupt (event) line for indication of status change.
  - Digital interface to USB transceiver and RS232 serial interface
- Control Unit
  - Pulse width modulated (PWM) LED driver for dimmed light. On/off switch.
  - Over-temperature warning
  - State machine to control System Start-Up
  - Under-voltage shutdown with defined system behaviour
  - Charger detection
  - Detection of battery insertion/removal
  - Independent LDO control (switch on/off, standby)
  - Voltages programmable by software and hardware
  - ID registers
  - System watchdog timer
  - On-chip oscillator
- Package
  - Ultra-thin PG-WFSGA 121 (7 × 7 × 0.8 mm)
- Evaluation kits

[www.infineon.com/mobilesolutions](http://www.infineon.com/mobilesolutions)


Mobile Solutions



Never stop thinking



## Block Diagram [查询"PMB6821"供应商](#)

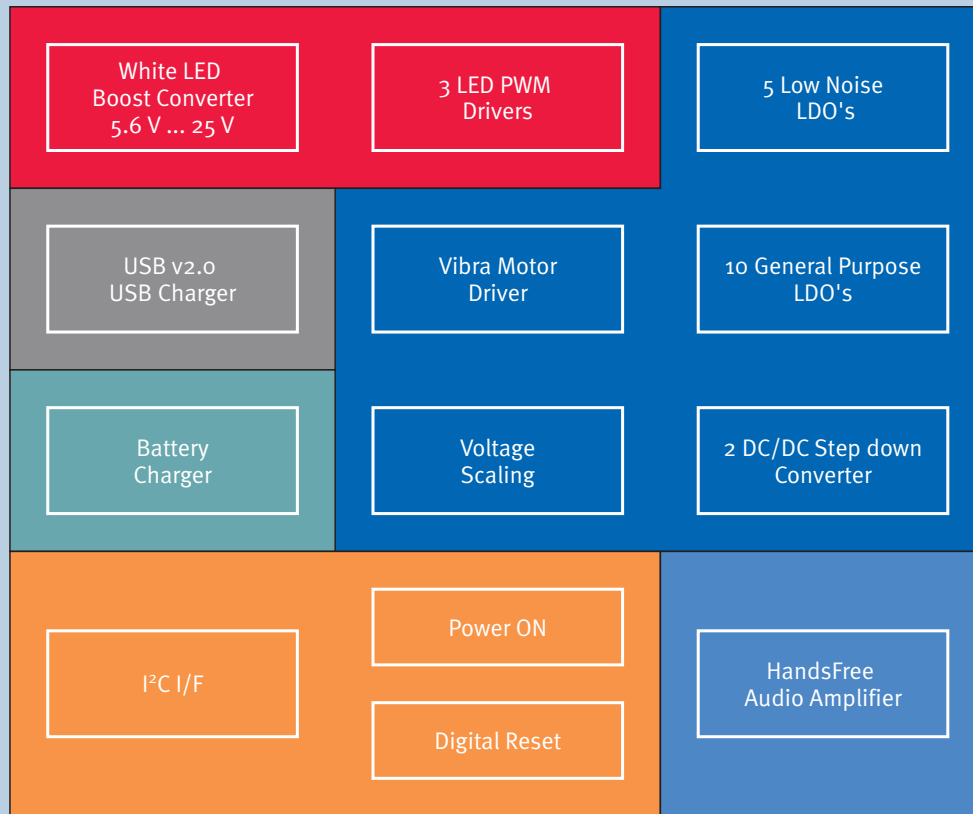

How to reach us:  
<http://www.infineon.com>

Published by  
 Infineon Technologies AG  
 81726 München, Germany

© Infineon Technologies AG 2006.  
 All Rights Reserved.

### Legal Disclaimer

The information given in this Product Brief shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Ordering No. B134-H8836-X-X-7600  
 Printed in Germany  
 PS 06061. nb

**This datasheet has been downloaded from:**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**Free Download**

**Daily Updated Database**

**100% Free Datasheet Search Site**

**100% Free IC Replacement Search Site**

**Convenient Electronic Dictionary**

**Fast Search System**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**