

357-595

BFY 81

DUAL, HIGH-GAIN, LOW-NOISE, LOW-CURRENT TYPE

NPN DIFFUSED SILICON PLANAR TRANSISTORS

GENERAL DESCRIPTION - The BFY81 is a six terminal device containing two isolated high gain NPN double diffused silicon PLANAR transistors. The planar process guarantees the stability of the initial match time. The good thermal tracking over a wide current and temperature range offers the circuit designer matched transistors with specified performance for differential amplifiers and low level DC amplifiers.

ABSOLUTE MAXIMUM RATINGS (Note 1)**Maximum Temperatures**

Storage Temperature

Operating Junction Temperature

Lead Temperature (Soldering, No Time Limit)

-65°C to + 200°C

200°C Maximum

300°C Maximum

Maximum Power Dissipations

Total Dissipation at 25°C Case Temperature (Note 2)

at 100°C Case Temperature (Note 2)

at 25°C Ambient Temperature (Note 2)

One Side Only

0.8 Watt

0.45 Watt

0.4 Watt

Both Sides

1.3 Watt

0.75 Watt

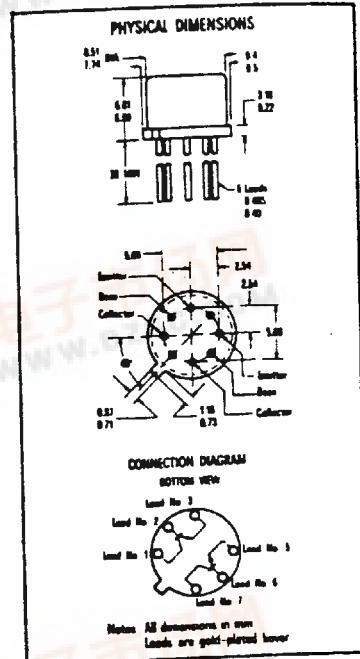
0.5 Watt

Maximum VoltagesBV_{CBO} Collector to Base VoltageLV_{CEO} Collector to Emitter VoltageBV_{EBO} Emitter to Base Voltage

45 Volts

45 Volts

6.0 Volts

**ELECTRICAL CHARACTERISTICS (25°C free air temperature unless otherwise noted)**

SYMBOL	CHARACTERISTIC	MIN.	MAX.	UNITS	TEST CONDITIONS
h_{FE}	DC Current Gain	60			$I_C = 10 \mu A$ $V_{CE} = 5.0 V$
h_{FE}	DC Current Gain	100			$I_C = 100 \mu A$ $V_{CE} = 5.0 V$
h_{FE}	DC Current Gain	150			$I_C = 1.0 mA$ $V_{CE} = 5.0 V$
h_{FE1}/h_{FE2}	DC Current Gain Ratio	0.8	1.0		$I_C = 100 \mu A$ $V_{CE} = 5.0 V$
$V_{BE}(\infty)$	Emitter to Base On Voltage	0.7	V		$I_C = 100 \mu A$ $V_{CE} = 5.0 V$
$V_{BE1}-V_{BE2}$	Base Emitter Voltage Differential	10	mV		$I_C = 100 \mu A$ $V_{CE} = 5.0 V$
$\Delta(V_{BE1}-V_{BE2})$	Base Emitter Voltage Differential Change	25	$\mu V/^\circ C$		$I_C = 100 \mu A$ $V_{CE} = 5.0 V$
$V_{CE}(\text{sat})$	Collector Saturation Voltage	0.35	V		$I_C = 1.0 mA$ $I_B = 0.1 mA$
I_{CBO}	Collector Cutoff Current	10	nA		$I_E = 0$ $V_{CB} = 40 V$
$I_{CBO}(150^\circ C)$	Collector Cutoff Current	10	μA		$I_E = 0$ $V_{CB} = 40 V$
I_{EBO}	Emitter Cutoff Current	10	nA		$I_C = 0$ $V_{EB} = 5.0 V$
I_{CEO}	Collector to Emitter Cutoff Current	10	nA		$I_B = 0$ $V_{CE} = 5.0 V$
BV_{CBO}	Collector to Base Breakdown Voltage	45	V		$I_C = 10 \mu A$ $I_E = 0$
BV_{EBO}	Emitter to Base Breakdown Voltage	6.0	V		$I_E = 10 \mu A$ $I_C = 0$
LV_{CEO}	Collector to Emitter Sustaining Voltage (Note 3)	45	V		$I_C = 10 mA$ $I_B = 0$
h_{fe}	High Frequency Current Gain ($f = 30$ Mc/s)	2.0			$I_C = 500 \mu A$ $V_{CE} = 5.0 V$
C_{ob}	Output Capacitance	6.0	pF		$I_E = 0$ $V_{CB} = 5.0 V$
NF	Noise Figure (Narrow Band) ($f = 1$ Kc/s)	4.0	db		$I_C = 10 \mu A$ $V_{CE} = 5.0 V$