




# SURFACE MOUNT CHIP LED LAMPS

## BL-Hxxx6G (0603-0.4mm) Series

Anode Mark For

- BL - HSxx6G
- BL - HDxx6G
- BL - HFxx6G

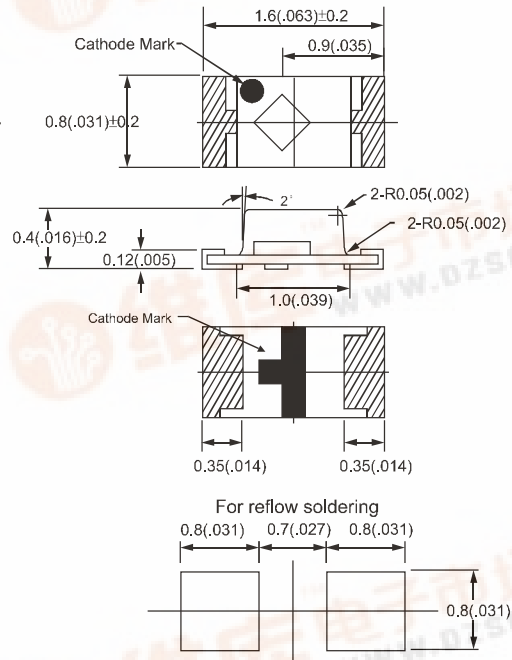

NOTE:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.10 (.004)$  unless otherwise specified.
3. Specifications are subject to change without notice.

**Absolute Maximum Ratings**  
(Ta=25°C)

	UNIT	SPEC.
IF	mA	30
IFp	mA	100
VR	V	5
Topr	°C	-25 ~ +80
Tstg	°C	-30 ~ +85

Part No.	Chip				Lens Appearance	Electro-optical Data (At 20mA)				Viewing Angle 2 θ 1/2 (deg)
	Material	Emitted Color	λp(nm)	λd(nm)		Vf (V)		Iv (mcd)		
						Typ.	Max.	Min.	Typ.	
BL-HGE36G	AlGaInP	Super Yellow Green	570	570	Water Clear	2.0	2.6	18.5	35.0	120°
BL-HGK36G	AlGaInP	Green	525	525		3.5	4.0	63.0	160.0	
BL-HG436G	InGaN	Bluish Green	505	505		3.5	4.0	63.0	120.0	
BL-HG636G	InGaN	Green	525	525		3.5	4.0	63.0	160.0	
BL-HJC36G	AlGaInP	Super Amber	610	605		2.0	2.6	63.0	100.0	
BL-HJE36G	AlGaInP	Super Orange Red	630	620		2.0	2.6	63.0	100.0	
BL-HKC36G	AlGaInP	Super Yellow	590	589		2.0	2.6	63.0	120.0	
BL-HUB36G	AlGaInP	Super Red	645	632		2.1	2.6	28.0	50.0	

Part No.	Chip				Lens Appearance	Electro-optical Data (At 5mA)				Viewing Angle 2 θ 1/2 (deg)
	Material	Emitted Color	λp(nm)	λd(nm)		Vf (V)		Iv (mcd)		
						Typ.	Max.	Min.	Typ.	
BL-HB336G	AllnGaN	Super Blue	460	465-470	Water Clear	2.8	3.2	8.2	15.0	120°
BL-HB536G	AllnGaN	Super Blue	470	470-475		2.8	3.2	8.2	20.0	

