




AMERICAN BRIGHT OPTOELECTRONICS CORP.

InGaN BIKINI BL-PSx-xSx Series


● **Feature:**

1. High brightness surface mount LED.
2. 120° viewing angle.
3. Small package outline.
4. Qualified according to JEDEC moisture sensitivity Level 2.
5. Compatible to both IR reflow soldering and TTW soldering.

● **Package Dimension:**

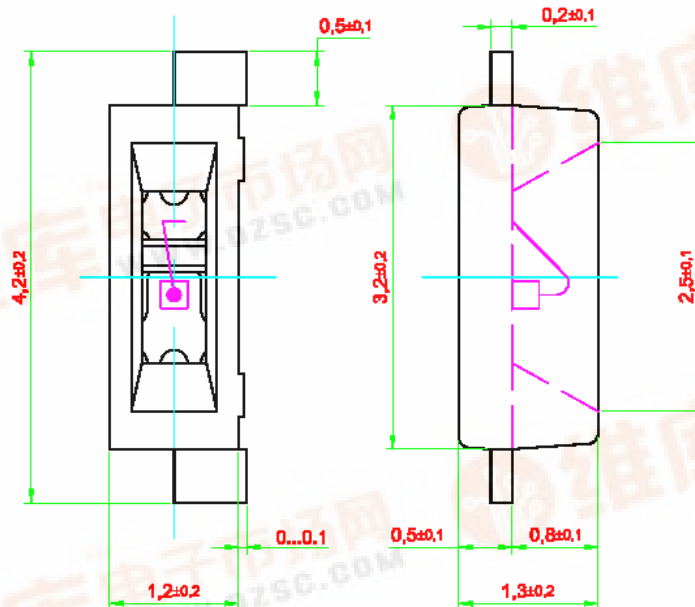

Recommended Solder Pad

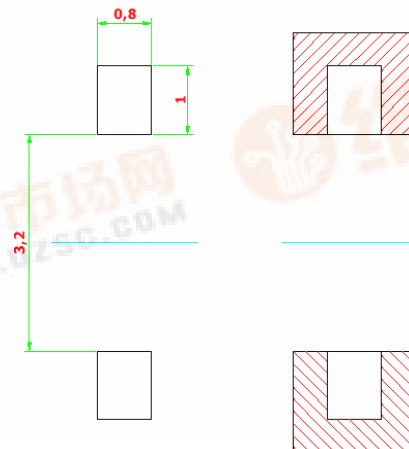

Pad design for better heat dissipation.

Solder resist.



AMERICAN BRIGHT OPTOELECTRONICS CORP.

InGaN BIKINI BL-PSx-xSx Series

● Optical Characteristics:

Part Number	Chip Technology Color	λ_{dom} (nm)	Luminous Intensity @ If = 20mA Iv (mcd)
BL-PSB-SSS-C10 - BIN P1 - BIN P2 - BIN Q1 - BIN Q2	InGaN / Blue	120	45.0 ... 112.5 45.0 ... 56.0 56.0 ... 71.5 71.5 ... 90.0 90.0 ... 112.5
BL-PSB-USS-C10 - BIN Q1 - BIN Q2 - BIN R1 - BIN R2			71.5 ... 180.0 71.5 ... 90.0 90.0 ... 112.5 112.5 ... 140.0 140.0 ... 180.0
BL-PST-SSS-C10 - BIN R1 - BIN R2 - BIN S1 - BIN S2	InGaN / True Green	120	112.5 ... 285.0 112.5 ... 140.0 140.0 ... 180.0 180.0 ... 224.0 224.0 ... 285.0
BL-PST-SSS-C20 - BIN T1 - BIN T2 - BIN U1			285.0 ... 560.0 285.0 ... 355.0 355.0 ... 450.0 450.0 ... 560.0
BL-PST-USS-C10 - BIN T1 - BIN T2 - BIN U1 - BIN U2			285.0 ... 715.0 285.0 ... 355.0 355.0 ... 450.0 450.0 ... 560.0 560.0 ... 715.0
BL-PSW-SSD-C10 - BIN R1 - BIN R2 - BIN S1 - BIN S2	InGaN / White	120	112.5 ... 285.0 112.5 ... 140.0 140.0 ... 180.0 180.0 ... 224.0 224.0 ... 285.0
BL-PSW-USD-C10 - BIN S1 - BIN S2 - BIN T1 - BIN T2			180.0 ... 450.0 180.0 ... 224.0 224.0 ... 285.0 285.0 ... 355.0 355.0 ... 450.0
BL-PSW-USD-C20 - BIN T1 - BIN T2 - BIN U1			285.0 ... 560.0 285.0 ... 355.0 355.0 ... 450.0 450.0 ... 560.0



AMERICAN BRIGHT OPTOELECTRONICS CORP.

InGaN BIKINI BL-PSx-xSx Series

NOTE:

1. Luminous intensity is measured with an accuracy of $\pm 11\%$.
2. Wavelength binning is carried for all units as per the wavelength-binning table. Only one wavelength group is allowed for each reel.
3. Vf binning is available upon request. Binning scheme is as per following.

● Absolute Maximum Ratings:

Parameter	Maximum Value	Unit
DC forward current.	20	mA
Peak pulse current. ($t_p \leq 10 \mu s$, Duty cycle = 0.005)	200	mA
Reverse voltage.	5	V
LED junction temperature.	125	$^{\circ}C$
Operating temperature.	-40 ... +100	$^{\circ}C$
Storage temperature.	-40 ... +100	$^{\circ}C$
Power dissipation (at room temperature)	80	mW

● Vf Binning:

Vf Bin @ 20mA	Forward voltage (V)
Standard	3.05 ... 4.25 (max)
00	3.05 ... 3.35
01	3.35 ... 3.65
02	3.65 ... 3.95
03	3.95 ... 4.25

Forward voltage, Vf is measured with an accuracy of ± 0.1 V.



AMERICAN BRIGHT OPTOELECTRONICS CORP.

InGaN BIKINI BL-PSx-xSx Series


● Wavelength Grouping:

Color	Group	Wavelength distribution (nm)
BL-PSB; Blue	Full	464 - 476
	W	464 - 468
	X	468 - 472
	Y	472 - 476
BL-PST; True Green	Full	520 - 536
	W	520 - 524
	X	524 - 528
	Y	528 - 532
	Z	532 - 536

Wavelength is measured with an accuracy of ± 1 nm.



● BL-PSW: White Color Grouping

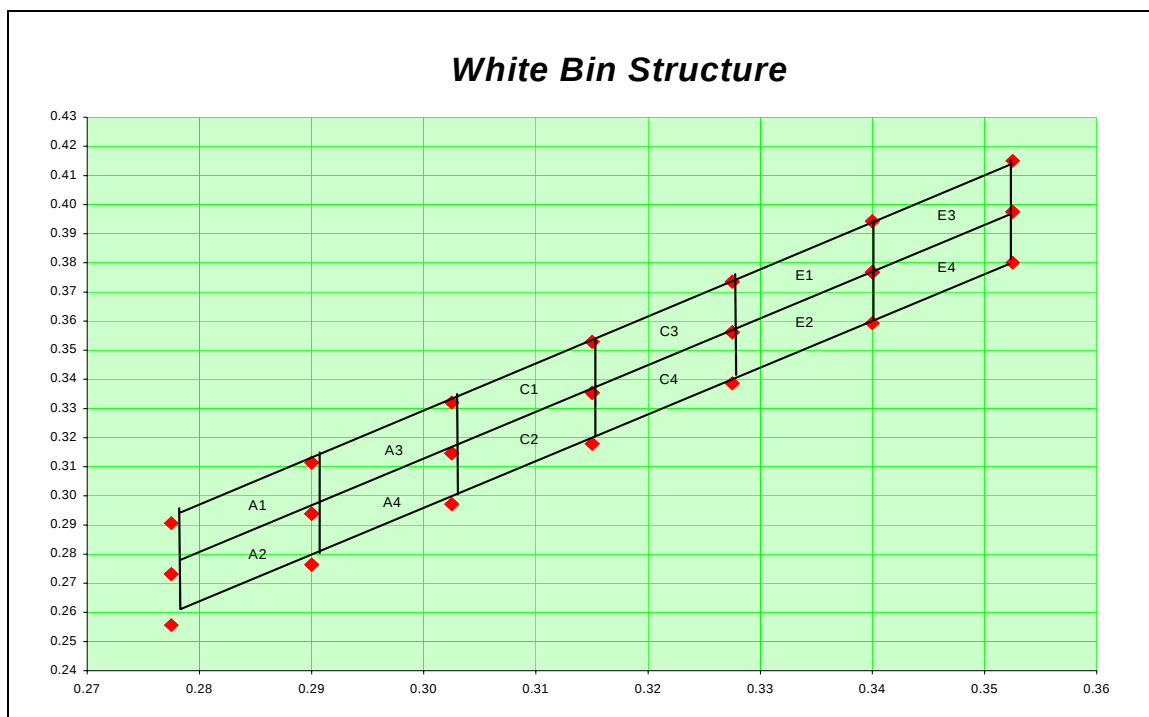

White bin coordinate

Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .

W						X					
Bin		W				Bin		X			
A1	Cx	0.2775	0.2900	0.2900	0.2775	E1	Cx	0.3275	0.3400	0.3400	0.3275
	Cy	0.2732	0.2939	0.3114	0.2907		Cy	0.3561	0.3768	0.3943	0.3736
A2	Cx	0.2775	0.2900	0.2900	0.2775	E2	Cx	0.3275	0.3400	0.3400	0.3275
	Cy	0.2557	0.2764	0.2939	0.2732		Cy	0.3386	0.3593	0.3768	0.3561
A3	Cx	0.2900	0.3025	0.3025	0.2900	E3	Cx	0.3400	0.3525	0.3525	0.3400
	Cy	0.2939	0.3146	0.3321	0.3114		Cy	0.3768	0.3975	0.4150	0.3943
A4	Cx	0.2900	0.3025	0.3025	0.2900	E4	Cx	0.3400	0.3525	0.3525	0.3400
	Cy	0.2764	0.2971	0.3146	0.2939		Cy	0.3593	0.3800	0.3975	0.3768
C1	Cx	0.3025	0.3150	0.3150	0.3025						
	Cy	0.3146	0.3354	0.3529	0.3321						
C2	Cx	0.3025	0.3150	0.3150	0.3025						
	Cy	0.2971	0.3179	0.3354	0.3146						
C3	Cx	0.3150	0.3275	0.3275	0.3150						
	Cy	0.3354	0.3561	0.3736	0.3529						
C4	Cx	0.3150	0.3275	0.3275	0.3150						
	Cy	0.3179	0.3386	0.3561	0.3354						



AMERICAN BRIGHT OPTOELECTRONICS CORP.

InGaN BIKINI BL-PSx-xSx Series

● Typical electro-optical characteristics curves:

Fig. 1 Relative luminous intensity vs. forward current.

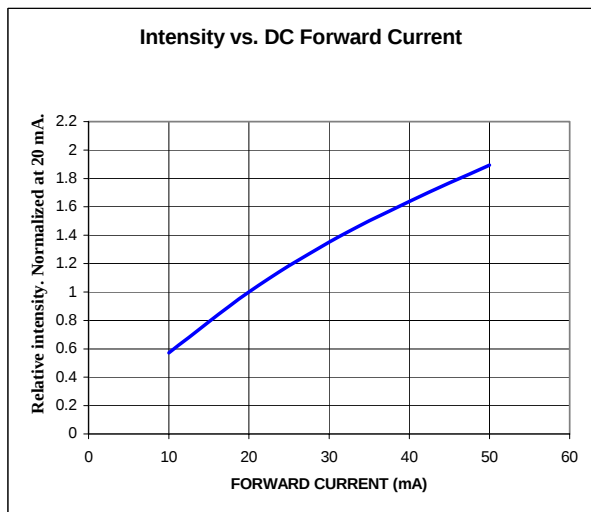


Fig. 2 Forward current vs. forward voltage.

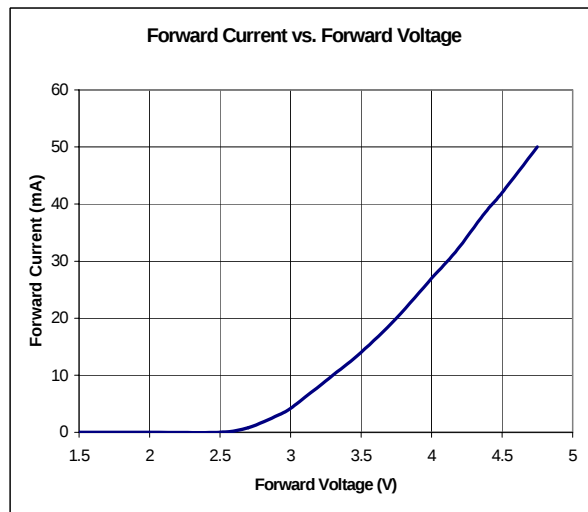


Fig. 3 Radiation pattern.

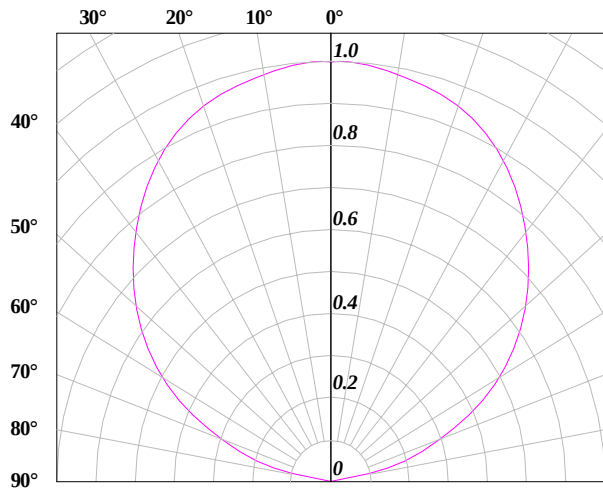


Fig. 4 Maximum current vs. ambient temperature.


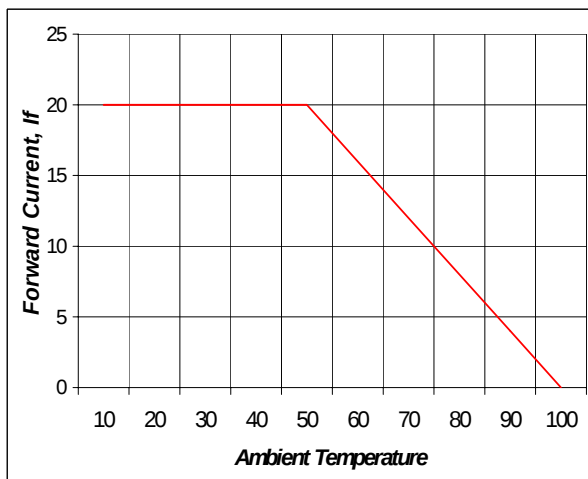


Fig. 5 Relative Intensity vs. Wavelength



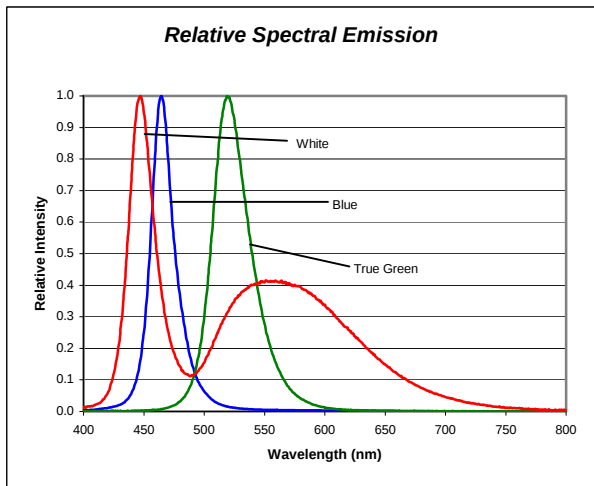

AMERICAN BRIGHT OPTOELECTRONICS CORP.

InGaN BIKINI BL-PSx-xSx Series

Fig. 6 Recommended IR-reflow Soldering Profile (acc. To IPC 9501).


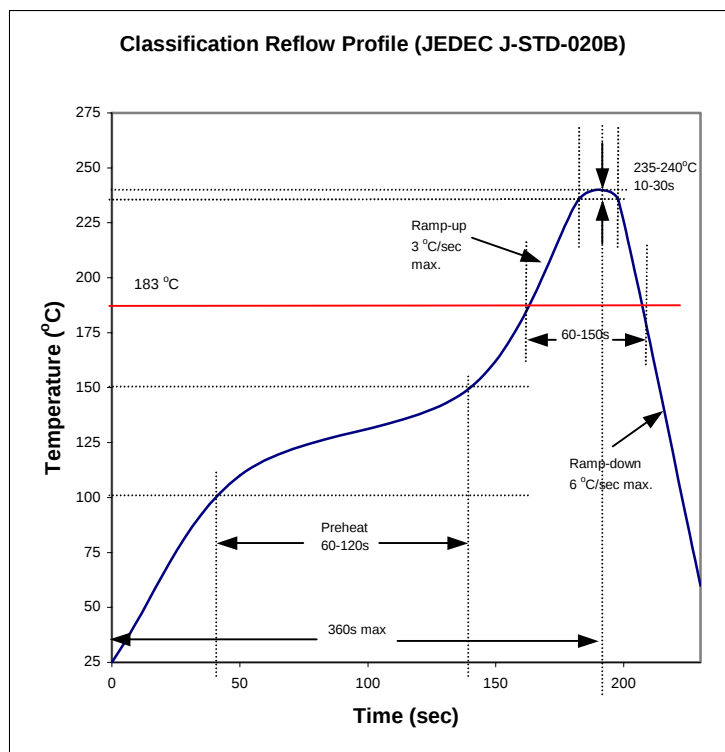


Fig. 7 Recommended TTW Soldering Profile (acc. to CECC 00802).



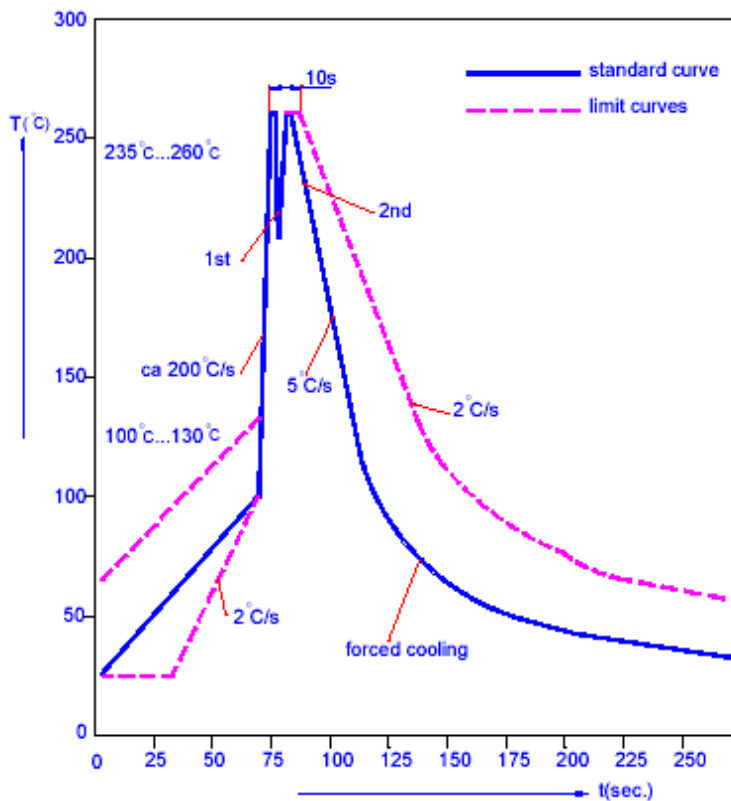

AMERICAN BRIGHT OPTOELECTRONICS CORP.

InGaN BIKINI BL-PSx-xSx Series

● **Taping And Orientation:**

Reels come in quantity of 10,000 units or 2500 units.

Reel diameters are 330 mm and 180 mm respectively.

