

3875081 G E SOLID STATE

01E 17704 D T-25-13

Silicon Controlled Rectifiers

C106 Series

File Number 1005


4-A Sensitive-Gate Silicon Controlled Rectifiers

For Power-Switching and Control Application

Features:

- 3.5-A(rms) on-state current ratings
- 20-A peak surge capability
- Glass-passivated chip for stability
- Formed-lead options available

TERMINAL DESIGNATIONS

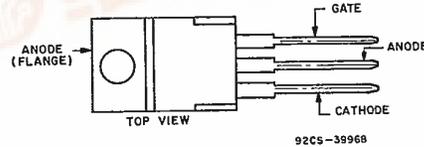

JEDEC TO-220AB

The RCA-C106 series of sensitive-gate silicon controlled rectifiers are designed for switching ac and dc currents. The types within the series differ in their voltage ratings; the voltage ratings are identified by suffix letters in type designations.

These SCR's have microampere gate-current requirements which permit operation with low-level logic circuits. They

can be used for lighting, power-switching, and motor-speed controls, and for gate-current amplification for driving large SCR's.

All types in the series utilize the JEDEC-TO-202AB (RCA VERSATAB) plastic package.

MAXIMUM RATINGS, Absolute-Maximum Values:

V_{RRM}	$R_{GK} = 1000 \Omega, T_C = -40 \text{ to } 110^\circ\text{C}$
V_{DRM}	$R_{GK} = 1000 \Omega, T_C = -40 \text{ to } 110^\circ\text{C}$
$I_{T(AV)}$	($T_C = 45^\circ\text{C}$)
$I_{T(RMS)}$	($T_C = 45^\circ\text{C}$)
$I_{T(DC)}$	($T_C = 70^\circ\text{C}$)
I_{TSM}	For one cycle of applied principal voltage, $T_C = 45^\circ\text{C}$
	60 Hz (sinusoidal)
	50 Hz (sinusoidal)
I_{GM}	($t = 10 \mu\text{s}$)
V_{GRM}
di/dt	$V_{DM} = V_{DRM}, I_G = 1 \text{ mA}, t_r = 0.5 \mu\text{s}, T_C = 110^\circ\text{C}$
t^2	[At T_C shown for $I_{T(RMS)}$]:
	$t = 10 \text{ ms}$
	8.33 ms
	1 ms
P_{GM}	(For $10 \mu\text{s}$ max.)
$P_{G(AV)}$	(Averaging time = 10 ms max.)
T_{slg}
T_C
T_T	(During soldering for 10 s max.)

C106F C106A C106B C106C C106D C106E C106M C106S C106N

	50	100	200	300	400	500	600	700	800	
V										V
A					2.2					A
A					3.5					A
A					2.6					A
A					20					A
A					18.5					A
A					0.2					A
V					6					V
A/ μs					100					A/ μs
A's					1.77					A's
A's					1.67					A's
A's					0.82					A's
W					0.5					W
W					0.1					W
$^\circ\text{C}$					-40 to +150					$^\circ\text{C}$
$^\circ\text{C}$					-40 to +110					$^\circ\text{C}$
$^\circ\text{C}$					250					$^\circ\text{C}$

