


FEATURES




- 30 - 500 MHz
- 30 mA, +5 VDC
- 0.5 dB LSB, 63.5 dB Range
- CMOS Control
- See 100C01585 for Connectorized Version

7 BIT



MODEL NO.
DA0285

PIN Diode 7 Section Attenuator

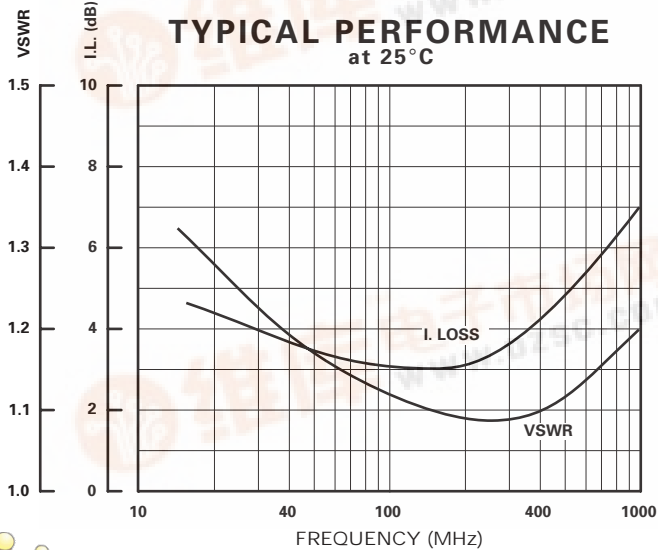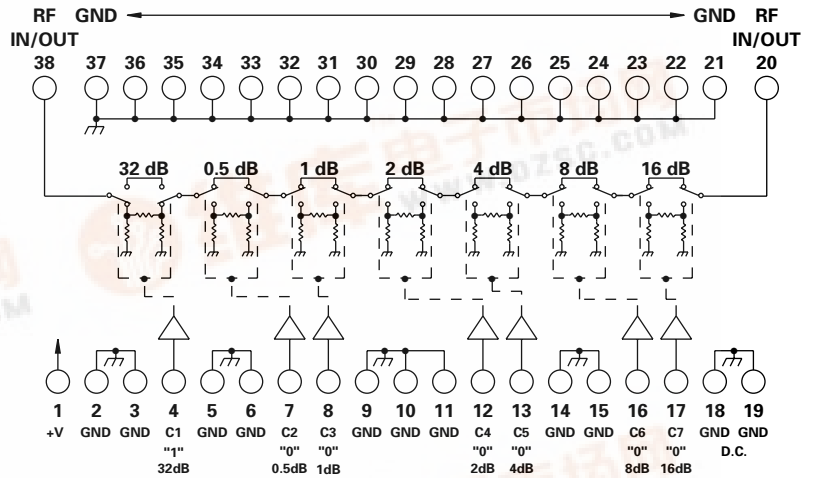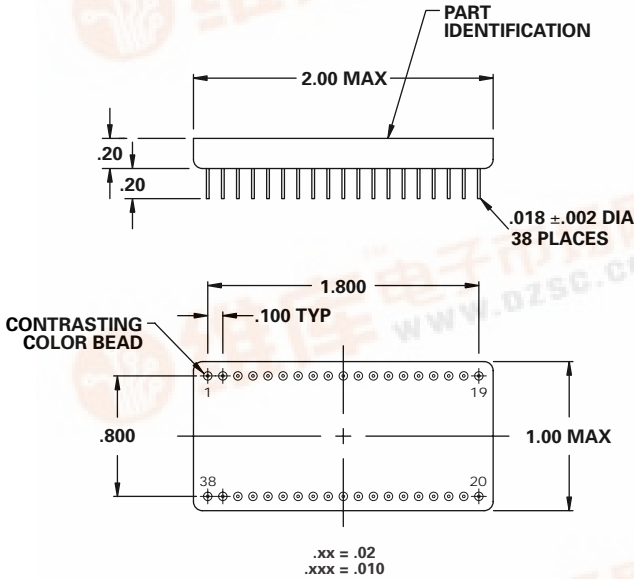

GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	30		500	MHz	
DC Current		30	50	mA	At +5 VDC Supply
Control Type		CMOS			7 Line Logic "0" = Thru Logic "1" = Attenuation
Control Current	High		40	µA	V _{IH} = +2.7 V
	Low		-200	µA	V _{IL} = +0.5 V
Insertion Loss		4.2	6.0	dB	
Attenuation	LSB Range Accuracy	0	0.5	dB	0.5, 1, 2, 4, 8, 16, 32 ± (0.15 dB +2% of Atten. Setting in dB) for Values ≥ 1 dB ± .05 dB +15% of Atten. - dB for Values < 1 dB
VSWR		1.2/1	1.35/1		
Impedance		50		OHMS	
Switching Speed		5.0	20	µSec	50% Control to 90% / 10% RF
Transition (Rise/Fall) Time		1		µSec	90% / 10% or 10% / 90% RF
Switching (Video) Transients		100		mV	
RF Power	Operate No Damage	+18	+13 +20	dBm	0.1 dB Compression
Operating Temperature	-55	+25	+125	°C	TA

