查询DD12-12GWB供应商

捷多邦,专业PCB打样工厂,24小时加急出货

Kingbright

12SEGMENT BAR GRAPH ARRAY

P/N: DD-12GWB

GREEN


Features

- •SUITABLE FOR LEVEL INDICATORS.
- •LOW CURRENT OPERATION.
- •WIDE VIEWING ANGLE.
- •MECHANICALLY RUGGED.
- •DIFFERENT COLORS IN ONE UNIT AVAILABLE.
- •STANDARD: BLACK FACE, WHITE SEGMENT.
- •RoHS COMPLIANT.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions & Internal Circuit Diagram

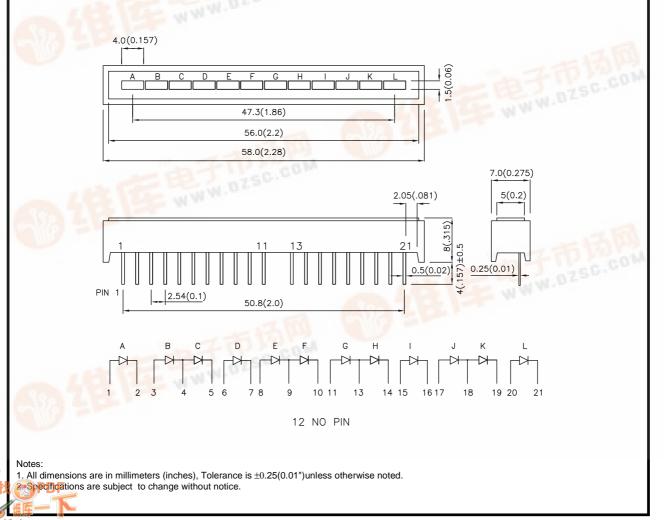

SPEC NO: DSAA4187

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (ucd) @ 10mA		Description
			Min.	Тур.	·
DD-12GWB	GREEN (GaP)	WHITE DIFFUSED	1200	5600	12 Segments Bargraph-Display

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage (Per Segment)	Green	2.2	2.5	V	IF=20mA
lr	Reverse Current (Per Segment)	Green		10	uA	VR = 5V

Absolute Maximum Ratings at TA=25°C


Parameter	Green	Units		
Power dissipation (Per Segment)	105	mW		
DC Forward Current (Per Segment)	25	mA		
Peak Forward Current [1] (Per Segment)	140	mA		
Reverse Voltage (Per Segment)	5	V		
Operating/Storage Temperature	ure -40°C To +85°C			
Lead Solder Temperature [2]	260°C For 5 Seconds			

Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.

Kingbright

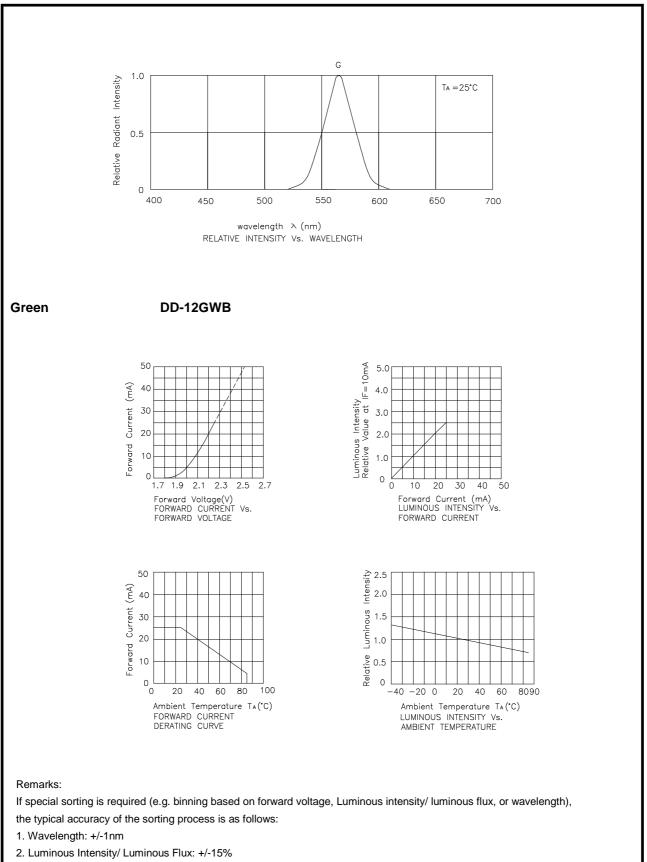

3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.