



## High-Speed Quad SPST CMOS Analog Switch

### DESCRIPTION

The DG201HS is an improved monolithic device containing four independent analog switches. It is designed to provide high speed, low error switching of analog signals. Combining low on-resistance ( $25\ \Omega$ ) with high speed ( $t_{ON}$ : 38 ns), the DG201HS is ideally suited for high speed data acquisition requirements.

To achieve high voltage ratings and superior switching performance, the DG201HS is built on a proprietary high-voltage silicon-gate process. An epitaxial layer prevents latchup.

Each switch conducts equally well in both directions when on, and blocks input voltages to the supply values, when off.

### FEATURES

- Fast Switching- $t_{ON}$ : 38 ns
- Low On-Resistance:  $25\ \Omega$
- Low Leakage: 100 pA
- Low Charge Injection
- TTL/CMOS Logic Compatible
- Single Supply Compatibility
- High Current Rating: - 30 mA



**RoHS\***  
COMPLIANT

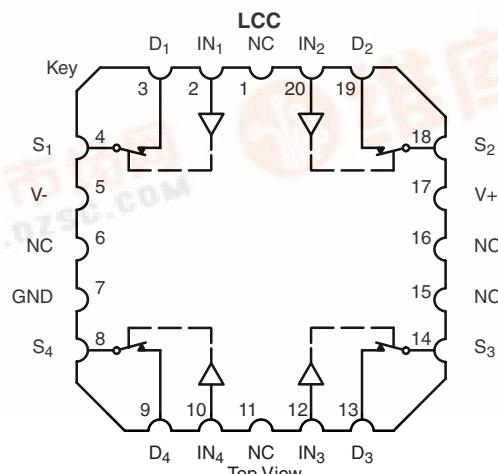
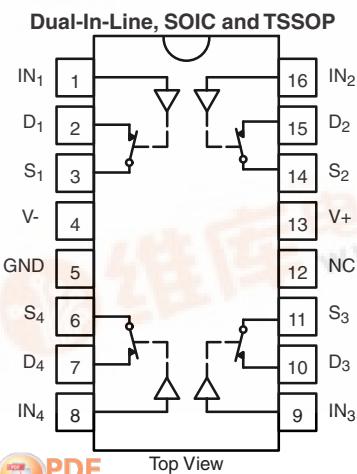
### BENEFITS

- Faster Throughput
- Higher Accuracy
- Reduced Pedestal Error
- Upgrades Existing Designs
- Simple Interfacing
- Replaces HI201HS, ADG201HS
- Space Savings (TSSOP)

### APPLICATIONS

- Data Acquisition
- Hi-Rel Systems
- Sample-and-Hold Circuits
- Communication Systems
- Automatic Test Equipment
- Integrator Reset Circuits
- Choppers
- Gain Switching
- Avionics

### FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



### TRUTH TABLE

Logic	Switch
0	ON
1	OFF

Logic "0"  $\leq 0.8\text{ V}$

Logic "1"  $\geq 2.4\text{ V}$

\* Pb-containing terminations are not RoHS compliant, exemptions may apply

# DG201HS

Vishay Siliconix



## ORDERING INFORMATION

Temp Range	Package	Part Number
- 40 to 85 °C	16-Pin Plastic DIP	DG201HSDJ DG201HSDJ-E3
	16-Pin Narrow SOIC	DG201HSDY DG201HSDY-E3 DG201HSDY-T1 DG201HSDY-T1-E3
	16-Pin TSSOP	DG201HSDQ DG201HSDQ-E3 DG201HSDQ-T1 DG201HSDQ-T1-E3

## ABSOLUTE MAXIMUM RATINGS

Parameter	Limit	Unit
V+ to V-	44	V
GND to V-	25	
Digital Inputs <sup>a</sup> , V <sub>S</sub> , V <sub>D</sub>	(V-) - 4 to (V+) + 4 or 30 mA, whichever occurs first	
Continuous Current (Any Terminal)	30	mA
Current, S or D (Pulsed at 1 ms, 10 % duty cycle)	100	
Storage Temperature	(A Suffix) - 65 to 150 (D Suffix) - 65 to 125	°C
Power Dissipation (Package) <sup>b</sup>	16-Pin Plastic DIP <sup>c</sup> 470	mW
	16-Pin CerDIP <sup>d</sup> 900	
	16-Pin Narrow Body SOIC and TSSOP <sup>e</sup> 600	
	LCC-20 <sup>d</sup> 900	

Notes:

a. Signals on S<sub>X</sub>, D<sub>X</sub>, or IN<sub>X</sub> exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

b. All leads welded or soldered to PC board.

c. Derate 6 mW/°C above 75 °C.

d. Derate 12 mW/°C above 75 °C.

e. Derate 7.6 mW/°C above 75 °C.

## SCHEMATIC DIAGRAM (TYPICAL CHANNEL)

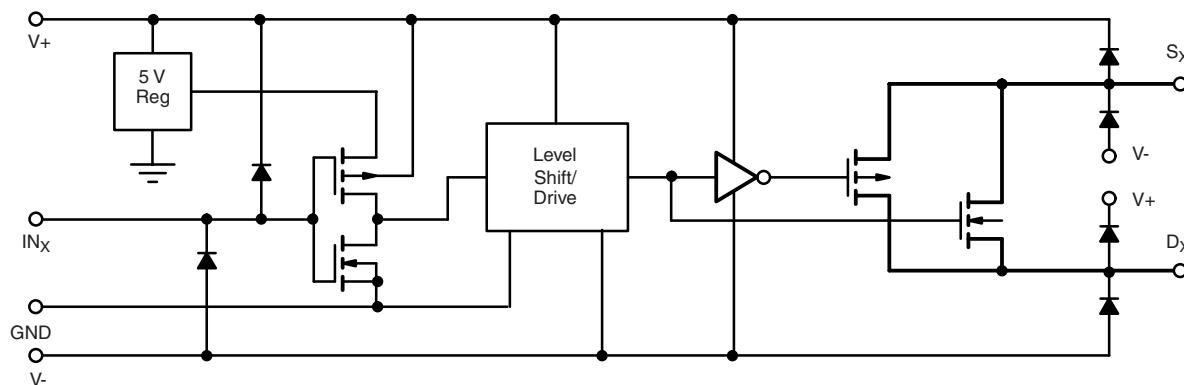


Figure 1.



DG201HS

Vishay Siliconix

SPECIFICATIONS <sup>a</sup>										
Parameter	Symbol	Test Conditions Unless Specified		Temp <sup>b</sup>	Typ <sup>c</sup>	A Suffix - 55 to 125 °C		D Suffix - 40 to 85 °C		Unit
		V+ = 15 V, V- = - 15 V	V <sub>IN</sub> = 3 V, 0.8 V <sup>f</sup>			Min <sup>d</sup>	Max <sup>d</sup>	Min <sup>d</sup>	Max <sup>d</sup>	
Analog Switch										
Analog Signal Range <sup>e</sup>	V <sub>ANALOG</sub>			Full		V-	V+	V-	V+	V
Drain-Source On-Resistance	r <sub>DS(on)</sub>	I <sub>S</sub> = - 10 mA, V <sub>D</sub> = ± 8.5 V V+ = 13.5 V, V- = - 13.5 V	Room Full	25		50 75		50 75		Ω
r <sub>DS(on)</sub> Match			Room	3						%
Switch Off Leakage Current	I <sub>S(off)</sub>	V+ = 16.5 V, V- = - 16.5 V V <sub>D</sub> = ± 15.5 V V <sub>S</sub> = ± 15.5 V	Room Full	0.1 - 1 - 60	- 1 60	1 - 20	- 1 20	1 20		nA
	I <sub>D(off)</sub>		Room Full	0.1 - 1 - 60	- 1 60	1 - 20	- 1 20	1 20		
Channel On Leakage Current	I <sub>D(on)</sub>	V+ = 16.5 V, V- = - 16.5 V V <sub>S</sub> = V <sub>D</sub> = ± 15.5 V	Room Full	0.1 - 1 - 60	- 1 60	1 - 20	- 1 20	1 20		
Digital Control										
Input, High Voltage	V <sub>INH</sub>		Full		2.4		2.4			V
Input, Low Voltage	V <sub>INL</sub>		Full			0.8		0.8		
Input Capacitance	C <sub>IN</sub>		Full	5						pF
Input Current	I <sub>INH</sub> or I <sub>INL</sub>	V <sub>IN</sub> under test = 0.8 V, 3 V	Full		- 1	1	- 1	1	1	μA
Dynamic Characteristics										
Turn-On Time	t <sub>ON</sub>	R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF V <sub>S</sub> = ± 10 V, V <sub>INH</sub> = 3 V See Figure 2	Room Full	48		60 75		60 75		ns
Turn-Off Time	t <sub>OFF1</sub>		Room Full	30		50 70		50 70		
	t <sub>OFF2</sub>		Room	150						
Output Settling Time to 0.1 %	t <sub>s</sub>		Room	180						
Charge Injection	Q	C <sub>L</sub> = 1 nF, V <sub>S</sub> = 0 V V <sub>gen</sub> = 0 V, R <sub>gen</sub> = 0 Ω	Room	- 5						pC
Off Isolation	OIRR	R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 10 pF f = 100 kHz	Room	85						dB
Crosstalk (Channel-to-Channel)	X <sub>TALK</sub>	Any Other Channel Switches R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 10 pF f = 100 kHz	Room	100						
Source Off Capacitance	C <sub>S(off)</sub>	V <sub>S</sub> , V <sub>D</sub> = 0 V, f = 1 MHz	Room	8						
Drain Off Capacitance	C <sub>D(off)</sub>		Room	8						
Channel On Capacitance	C <sub>D(on)</sub>		Room	30						
Drain-to-Source Capacitance	C <sub>DS(off)</sub>		Room	0.5						
Power Supplies										
Positive Supply Current	I <sub>+</sub>	V+ = 15 V, V- = - 15 V V <sub>IN</sub> = 0 or 5 V	Room Full	4.5		10		10		mA
Negative Supply Current	I <sub>-</sub>		Room Full	3.5	- 6		- 6			
Power Consumption <sup>c</sup>	P <sub>C</sub>		Full			240		240	mW	

Notes:

- a. Refer to PROCESS OPTION FLOWCHART.
- b. Room = 25 °C, Full = as determined by the operating temperature suffix.
- c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- e. Guaranteed by design, not subject to production test.
- f. V<sub>IN</sub> = input voltage to perform proper function.

# DG201HS

Vishay Siliconix



## SPECIFICATIONS<sup>a</sup> FOR SINGLE SUPPLY

Parameter	Symbol	Test Conditions Unless Specified $V_+ = 10.8 \text{ V}$ to $16.5 \text{ V}$ , $V_- = \text{GND} = 0 \text{ V}$ , $V_{IN} = 3 \text{ V}$ , $0.8 \text{ V}^f$	Temp <sup>b</sup>	Typ <sup>c</sup>	A Suffix -55 to 125 °C		D Suffix -40 to 85 °C		Unit
					Min <sup>d</sup>	Max <sup>d</sup>	Min <sup>d</sup>	Max <sup>d</sup>	
<b>Analog Switch</b>									
Analog Signal Range <sup>e</sup>	$V_{ANALOG}$		Full		0	$V_+$	0	$V_+$	V
Drain-Source On-Resistance	$r_{DS(on)}$	$I_S = -10 \text{ mA}$ , $V_D = 8.5 \text{ V}$ $V_+ = 10.8 \text{ V}$	Room Full	65		90 120		90 120	Ω
Switch Off Leakage Current	$I_{S(off)}$	$V_+ = 16.5 \text{ V}$ $V_S = 0.5 \text{ V}$ , $10 \text{ V}$ $V_D = 10 \text{ V}$ , $0.5 \text{ V}$	Room Full	0.1 -60	-1 60	1 60	-1 20	1 20	nA
	$I_{D(off)}$		Room Full	0.1 -60	-1 60	1 60	-1 20	1 20	
Channel On Leakage Current	$I_{D(on)} + I_{S(on)}$	$V_+ = 16.5 \text{ V}$ $V_D = 0.5 \text{ V}$ , $10 \text{ V}$	Room Full	0.1 -60	-1 60	1 60	-1 20	1 20	
<b>Digital Control</b>									
Input, High Voltage	$V_{INH}$		Full		2.4		2.4		V
Input, Low Voltage	$V_{INL}$		Full			0.8		0.8	
Input Capacitance	$C_{IN}$		Full	5					pF
Input Current	$I_{INH}$ or $I_{INL}$	$V_+ = 16.5 \text{ V}$ $V_{IN}$ under test = $0.8 \text{ V}$ , $3 \text{ V}$	Full		-1	1	-1	1	μA
<b>Dynamic Characteristics</b>									
Turn-On Time	$t_{ON}$	$R_L = 1 \text{ kΩ}$ , $C_L = 35 \text{ pF}$ $V_S = 2 \text{ V}$ , $V_+ = 10.8 \text{ V}$ See Figure 2	Room Full			50 70		50 70	ns
Turn-Off Time	$t_{OFF1}$		Room Full			50 70		50 70	
	$t_{OFF2}$		Room	150					
Output Settling Time to 0.1 %	$t_s$		Room	180					
Charge Injection	Q	$C_L = 1 \text{ nF}$ , $V_S = 0 \text{ V}$ $V_{gen} = 0 \text{ V}$ , $R_{gen} = 0 \text{ Ω}$	Room	10					pC
Off Isolation	OIRR	$R_L = 1 \text{ kΩ}$ , $C_L = 10 \text{ pF}$ $f = 100 \text{ kHz}$	Room	85					dB
Crosstalk (Channel-to-Channel)	$X_{TALK}$	Any Other Channel Switches $R_L = 1 \text{ kΩ}$ , $C_L = 10 \text{ pF}$ $f = 100 \text{ kHz}$	Room	100					
Source Off Capacitance	$C_{S(off)}$	$f = 1 \text{ MHz}$	Room	10					pF
Drain Off Capacitance	$C_{D(off)}$		Room	10					
Channel On Capacitance	$C_{D(on)}$	$V_{ANALOG} = 0 \text{ V}$	Room	30					
<b>Power Supply</b>									
Positive Supply Current	$I_+$	$V_+ = 15 \text{ V}$ , $V_{IN} = 0$ or $5 \text{ V}$	Full			10		10	mA
Power Consumption <sup>c</sup>	$P_C$		Full			150		150	mW

Notes:

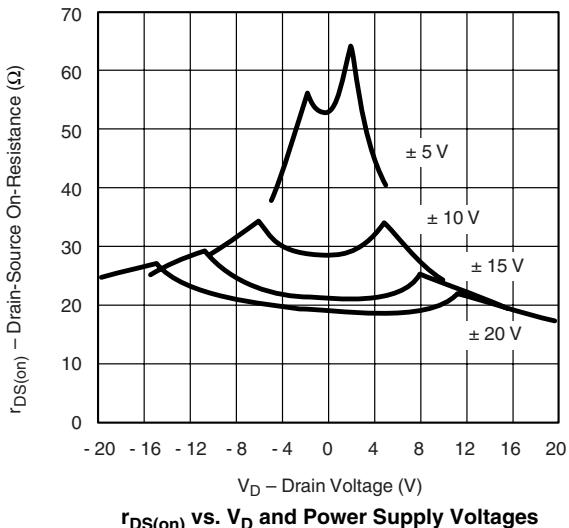
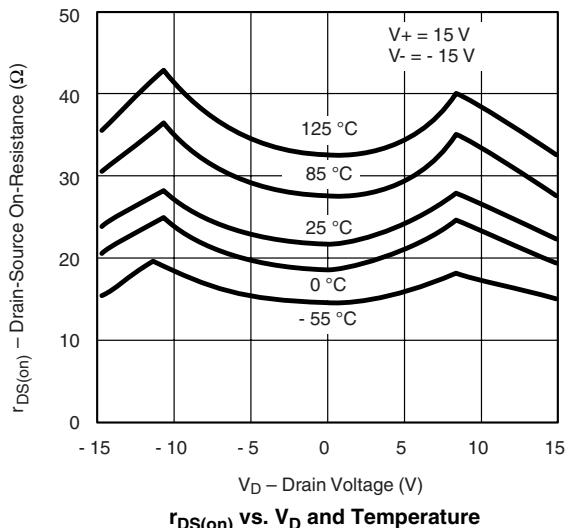
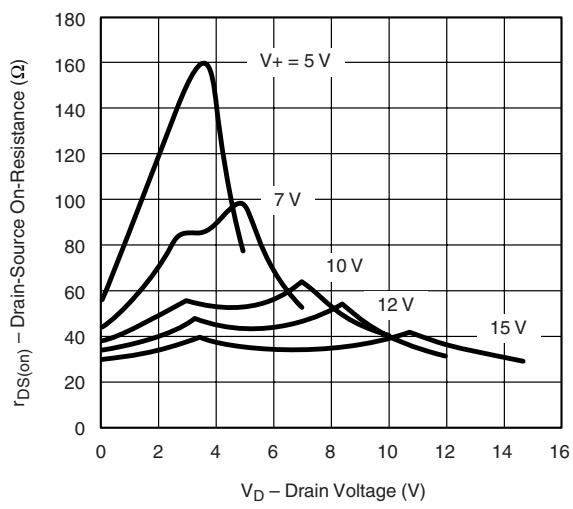
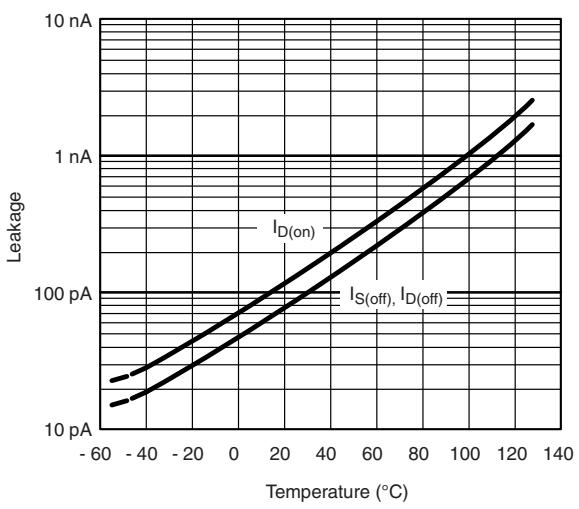
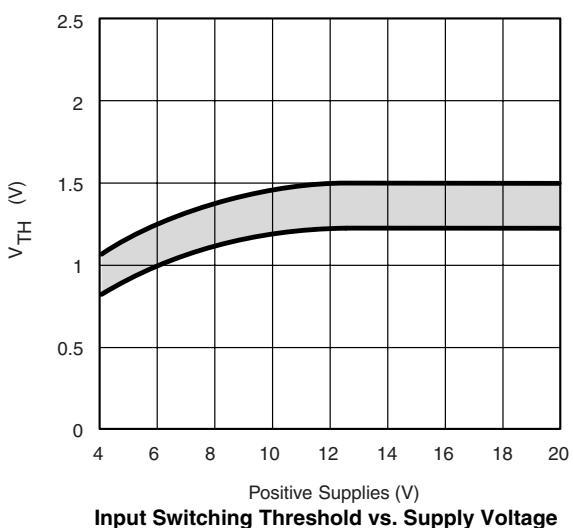
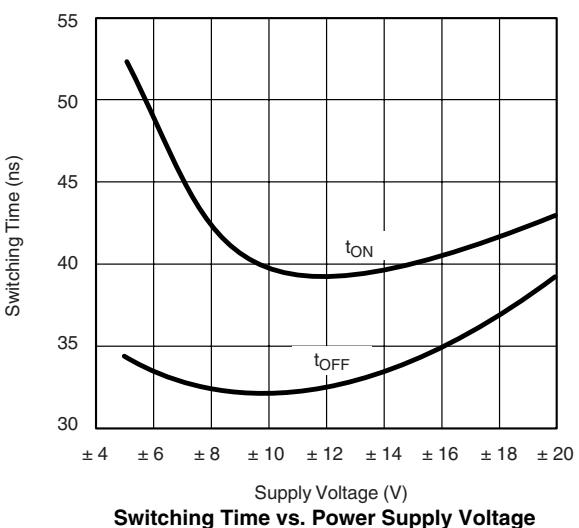
- a. Refer to PROCESS OPTION FLOWCHART.
- b. Room = 25 °C, Full = as determined by the operating temperature suffix.
- c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- e. Guaranteed by design, not subject to production test.
- f.  $V_{IN}$  = input voltage to perform proper function.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



DG201HS

Vishay Siliconix


**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted **$r_{DS(on)}$  vs.  $V_D$  and Power Supply Voltages** **$r_{DS(on)}$  vs.  $V_D$  and Temperature** **$r_{DS(on)}$  vs.  $V_D$  and Single Power Supply Voltages****Leakage Currents vs. Temperature****Input Switching Threshold vs. Supply Voltage****Switching Time vs. Power Supply Voltage**

# DG201HS

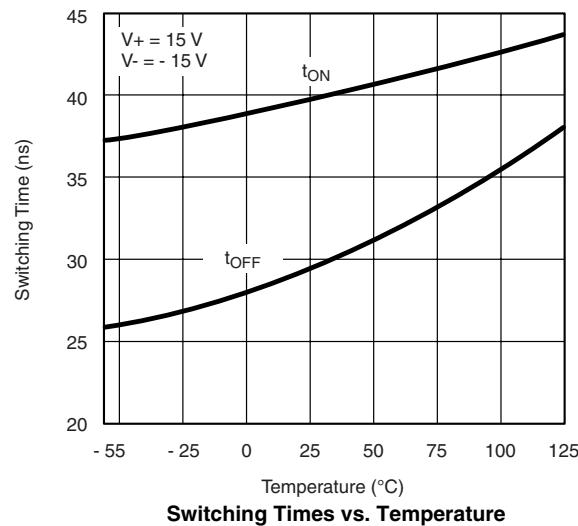
Vishay Siliconix




## TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted




Switching Times vs. Temperature

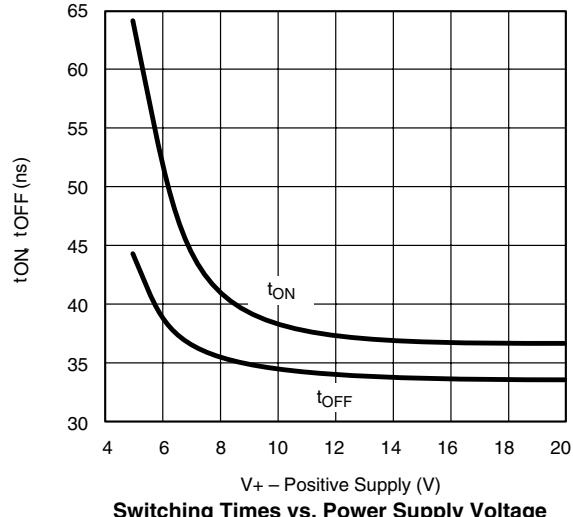

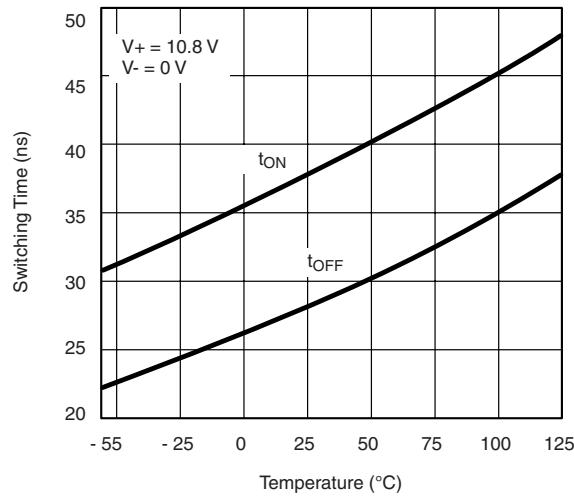
Switching Times vs. Power Supply Voltage




Switching Times vs. Temperature

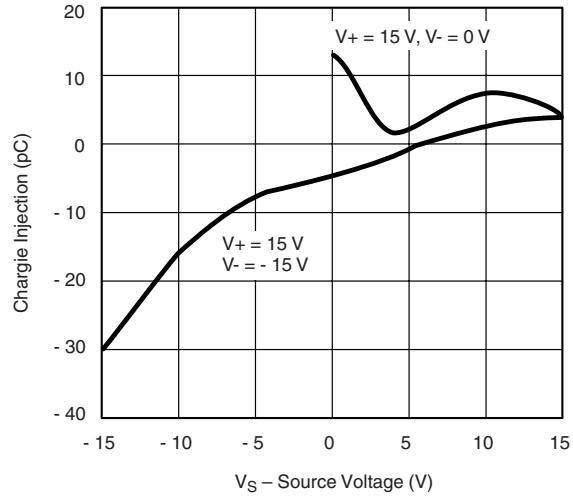





Charge Injection vs. Source Voltage

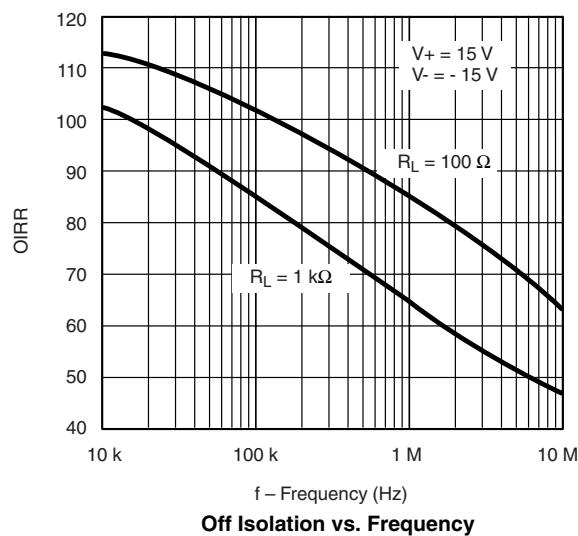


Off Isolation vs. Frequency

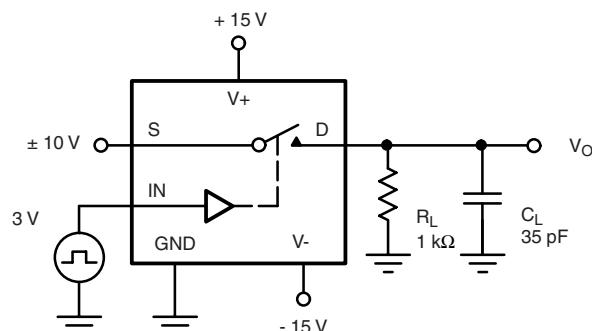**TEST CIRCUITS**

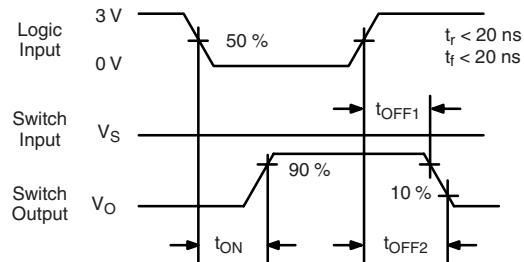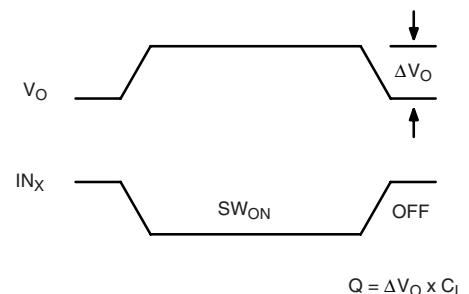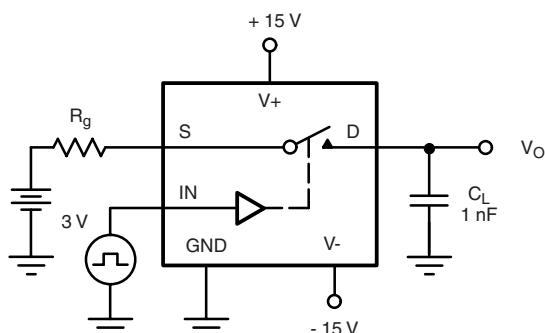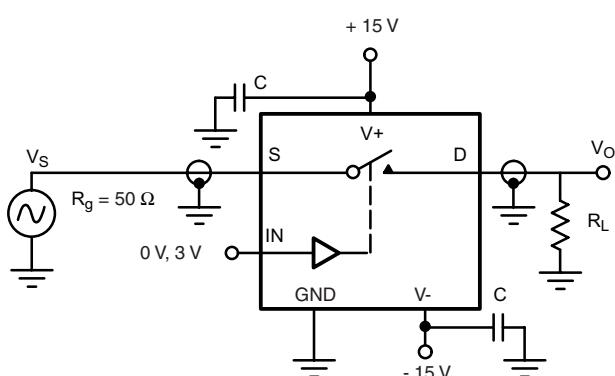 $C_L$  (includes fixture and stray capacitance)

$$V_O = V_S \frac{R_L}{R_L + r_{DS(on)}}$$


**Figure 2. Switching Time**

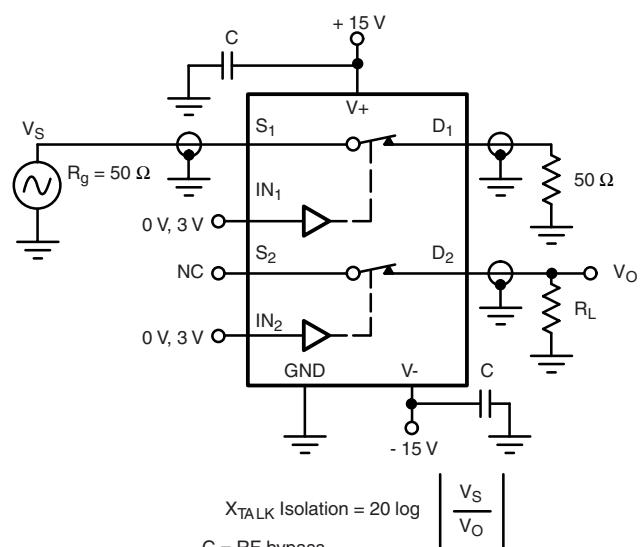**Figure 3. Charge Injection**


$$\text{Off Isolation} = 20 \log \left| \frac{V_S}{V_O} \right|$$


**Figure 5. Crosstalk**

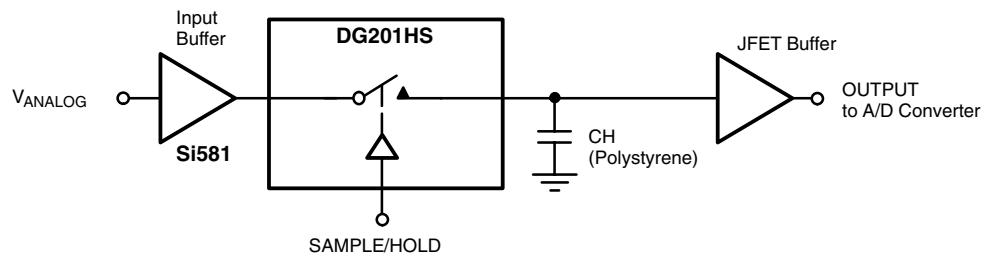
# DG201HS

Vishay Siliconix



## APPLICATIONS

A high-speed, low-glitch analog switch such as Vishay Siliconix's DG201HS improves the accuracy and shortens the acquisition and settling times of a sample-and-hold circuit.





## Legal Disclaimer Notice

Vishay

### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.