



查询DG448DV-T1-E3供应商

捷多邦，专业PCB打样工厂，24小时加急出货

DG447/448

Vishay Siliconix

Low Power, High Voltage SPST Analog Switches

DESCRIPTION

The DG447 and DG448 are dual supply single-pole/single-throw (SPST) switches. On resistance is $25\ \Omega$ maximum and flatness is $2.2\ \Omega$ max over the specified analog signal range. These analog switches were designed to provide high speed, low error switching of precision analog signals. The primary application areas are in the routing and switching in telecommunications and test equipment. Combining low power, low leakages, low on-resistance and small physical size, the DG447/448 are also ideally suited for portable and battery powered industrial and military equipment.

The DG447 has one normally closed switch, while the DG448 switch is normally open. They operate either from a single $+7\text{ V}$ to 36 V supply or from dual $\pm 4.5\text{ V}$ to $\pm 20\text{ V}$ supplies. They are offered in the very popular, small T6SOP6 package.

FEATURES

- $\pm 15\text{ V}$ Analog Signal Range
- On-Resistance - $r_{DS(on)}$: $25\ \Omega$ max
- Fast Switching Action - T_{ON} : 100 ns
- V_L Logic Supply Not Required
- TTL CMOS Input Compatible
- Rail To Rail Signal Handling
- Dual Or Single Supply Operation



RoHS
COMPLIANT



BENEFITS

- Wide Dynamic Range
- Low Signal Errors and Distortion
- Break-Before-Make Switching Action
- Simple Interfacing
- Reduced Board Space
- Improved Reliability

APPLICATIONS

- Precision Test Equipment
- Precision Instrumentation
- Communications Systems
- PBX, PABX Systems
- Audio Equipment
- Redundant Systems
- PC Multimedia Boards
- Hard Disc Drives

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



TRUTH TABLE

Logic	DG447	DG448
0	ON	OFF
1	OFF	ON

Logic "0" $\leq 0.8\text{ V}$

Logic "1" $\geq 2.4\text{ V}$

Device Marking:

DG447DV = G5xxx

DG448DV = G6xxx

DG447/448

Vishay Siliconix



ORDERING INFORMATION

Temp Range	Package	Part Number
DG447/DG448		
- 40 to 85 °C	6-Pin TSOP	DG447DV-T1-E3
		DG448DV-T1-E3

ABSOLUTE MAXIMUM RATINGS $T_A = 25^\circ\text{C}$, unless otherwise noted

Parameter Referenced To V-	Symbol	Limit	Unit
V+		44	V
GND		25	
Digital Inputs ^a , $V_{\text{no/nc}}$, V_{COM}		(V-) - 2 V to (V+) + 2 V or 30 mA, whichever occurs first	
Current , (Any Terminal) Continuous		30	mA
Current (NO or NC or COM) Pulsed at 1 ms, 10 % duty cycle		100	
Storage Temperature		- 65 to 150	°C
Power Dissipation (Package) ^b	6-Pin TSOP ^c	570	mW

Notes:

- a. Signals on NO, NC, COM, or IN exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- b. All leads welded or soldered to PC Board.
- c. Derate 7 mW/°C above 70 °C.



DG447/448

Vishay Siliconix

SPECIFICATIONS ^a							
Parameter	Symbol	Test Conditions Unless Otherwise Specified $V_+ = 15 \text{ V}$, $V_- = -15 \text{ V}$ $V_{IN} = 2.4 \text{ V}$, 0.8 V^f		D Suffix -40 to 85 °C			Unit
				Temp ^b	Min ^d	Typ ^c	
Analog Switch							
Analog Signal Range ^e	V_{ANALOG}			Full	-15	15	V
Drain-Source On-Resistance	r_{ON}	$I_{no/nc} = 10 \text{ mA}$, $V_{COM} = 10 \text{ V}$ $V_+ = 13.5 \text{ V}$, $V_- = -13.5 \text{ V}$	Room Full		17	25	Ω
On-Resistance Flatness	r_{ON} Flatness	$I_{no/nc} = 10 \text{ mA}$, $V_{COM} = \pm 5 \text{ V}$, 0 V $V_+ = 13.5 \text{ V}$, $V_- = -13.5 \text{ V}$	Room Full		0.8	2.2	
Switch Off Leakage Current	$I_{no/nc(off)}$	$V_+ = 16.5 \text{ V}$, $V_- = -16.5 \text{ V}$ $V_{COM} = \pm 15.5 \text{ V}$	Room Full	-1	-0.1	1	nA
	$I_{COM(off)}$	$V_{no/nc} = -/+ 15.5 \text{ V}$	Room Full	-10	-0.1	10	
Channel On Leakage Current	$I_{COM(on)}$	$V_+ = 16.5 \text{ V}$, $V_- = -16.5 \text{ V}$ $V_{COM} = V_{no/nc} = \pm 15.5 \text{ V}$	Room Full	-1	-0.1	1	
				-10		10	
Digital Control							
Input, High Voltage	I_{INH}		Full	2.4			V
Input, Low Voltage	I_{INL}		Full			0.8	
Input Capacitance ^e	C_{IN}		Room		5		pF
Input Current	I_{IN}	$V_{IN} = 0 \text{ or } 5 \text{ V}$		-1		1	μA
Dynamic Characteristics							
Turn-On Time	t_{ON}	$R_L = 300 \Omega$, $C_L = 35 \text{ pF}$ $V_{no/nc} = \pm 10 \text{ V}$	Room Full		100	130	ns
Turn-Off Time	t_{OFF}		Room Full		50	95	
Charge Injection ^e	Q	$C_L = 1 \text{ nF}$, $V_{gen} = 0 \text{ V}$, $R_{gen} = 0 \Omega$	Room		2		pC
Off-Isolation ^e	OIRR	$C_L = 5 \text{ pF}$, $R_L = 50 \Omega$, $f = 1 \text{ MHz}$	Room		-72		dB
Source Off Capacitance ^e	$C_{S(off)}$	$f = 1 \text{ MHz}$	Room		19		pF
Drain Off Capacitance ^e	$C_{D(off)}$		Room		8		
Channel On Capacitance ^e	$C_{D(on)}$	$f = 1 \text{ MHz}$	Room		30		
Power Supplies							
Positive Supply Current	I+	$V_+ = 16.5 \text{ V}$, $V_- = -16.5 \text{ V}$ $V_{IN} = 0 \text{ or } 5 \text{ V}$	Room Full		16	30	μA
Negative Supply Current	I-		Room Full	-1	-0.02		

DG447/448

Vishay Siliconix









SPECIFICATIONS ^a							
Parameter	Symbol	Test Conditions Unless Otherwise Specified $V_+ = 12 \text{ V}$, $V_- = 0 \text{ V}$ $V_{IN} = 2.4 \text{ V}, 0.8 \text{ V}^f$	Temp ^b	D Suffix - 40 to 85 °C			Unit
				Min ^d	Typ ^c	Max ^d	
Analog Switch							
Analog Signal Range ^e	V_{ANALOG}		Full	0		12	V
Drain-Source On-Resistance	r_{ON}	$I_{no/nc} = -10 \text{ mA}$, $V_{COM} = 8 \text{ V}$ $V_+ = 10.8 \text{ V}$	Room Full		32	45 60	Ω
On-Resistance Flatness	r_{ON} Flatness	$I_{no/nc} = 10 \text{ mA}$, $V_{COM} = 2, 6, 8 \text{ V}$ $V_+ = 10.8 \text{ V}$	Room Full		2	6 8	Ω
Dynamic Characteristics							
Turn-On Time	t_{ON}	$V_{NO, NC} = \pm 10 \text{ V}$, $R_L = 300 \Omega$, $C_L = 35 \text{ pF}$	Room Full		140	175 225	nS
Turn-Off Time	t_{OFF}		Room Full		50	120 150	
Charge Injection ^e	Q	$C_L = 10 \text{ nF}$, $V_{gen} = 0 \text{ V}$, $R_{gen} = 0 \Omega$	Room		10		pC
Power Supplies							
Positive Supply Current	I_+	$V_+ = 13.2 \text{ V}$, $V_{IN} = 0 \text{ V}, 5 \text{ V}$	Room Full		22	50 75	μA

Notes:

- a. Refer to PROCESS OPTION FLOWCHART.
- b. Room = 25 °C, Full = as determined by the operating temperature suffix.
- c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- e. Guaranteed by design, not subject to production test.
- f. V_{IN} = input voltage to perform proper function.

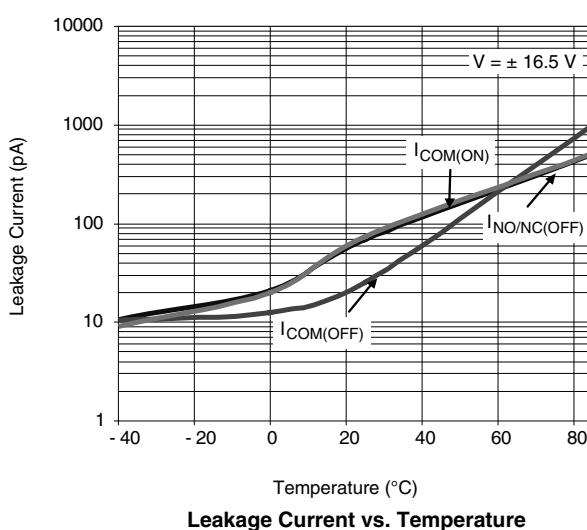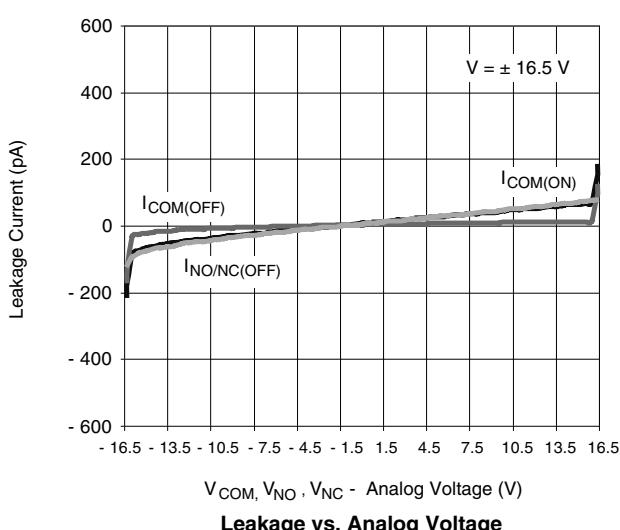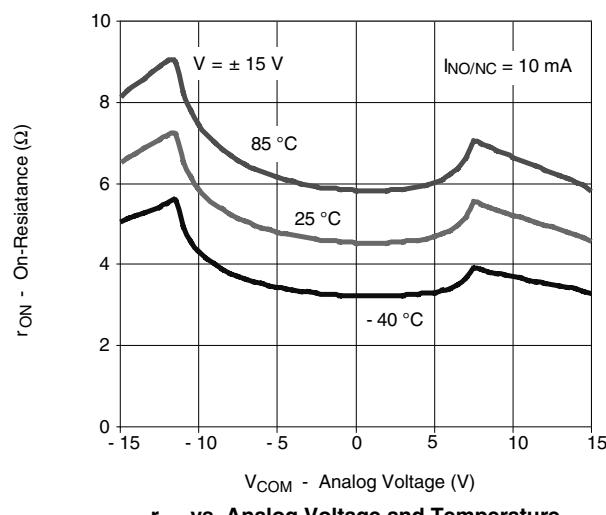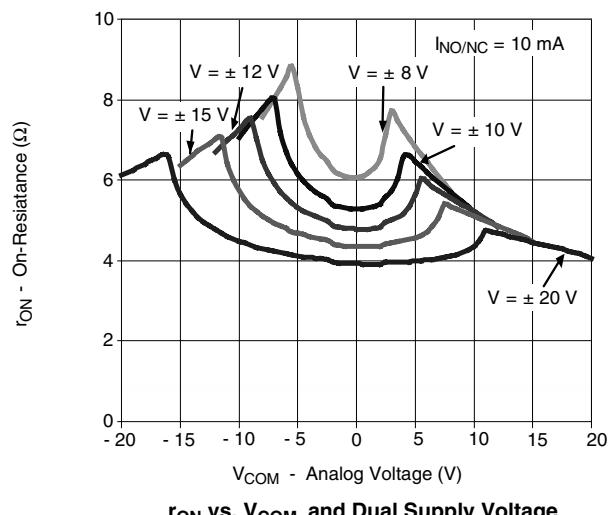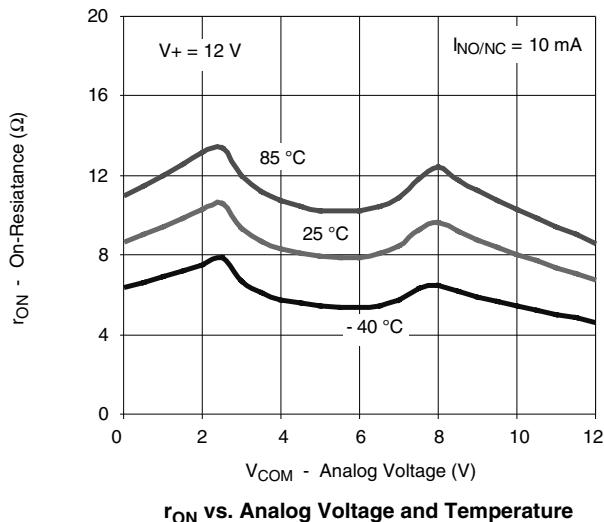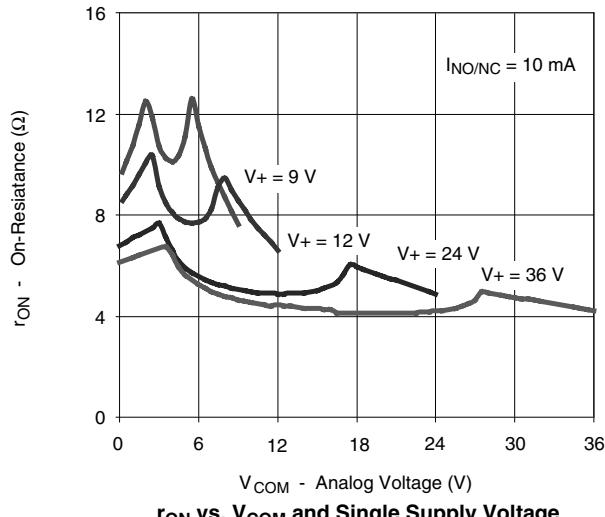Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


TYPICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, unless otherwise noted


DG447/448


Vishay Siliconix



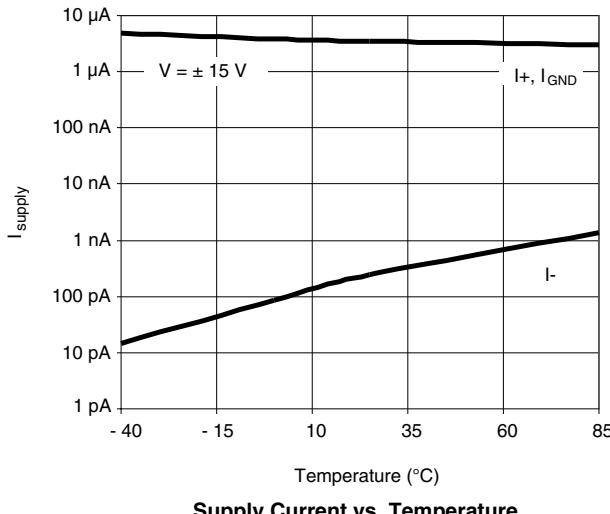
TYPICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, unless otherwise noted




Supply Current vs. Temperature

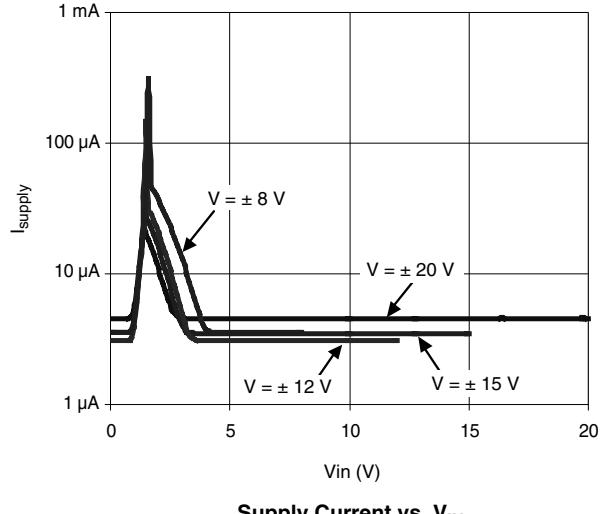


Supply Current vs. V_{IN}

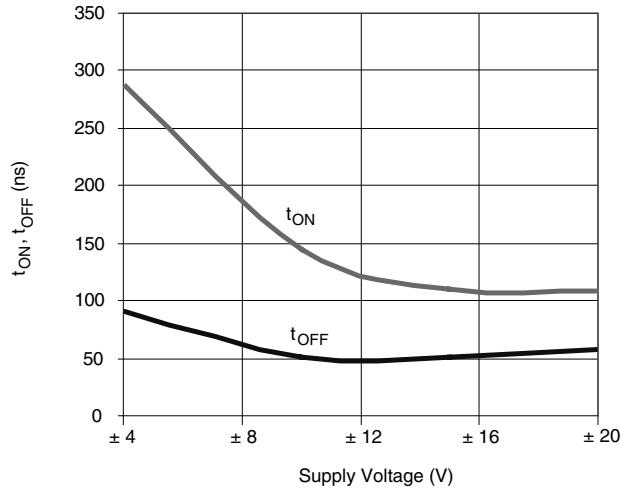


Switching Time vs. Supply Voltages

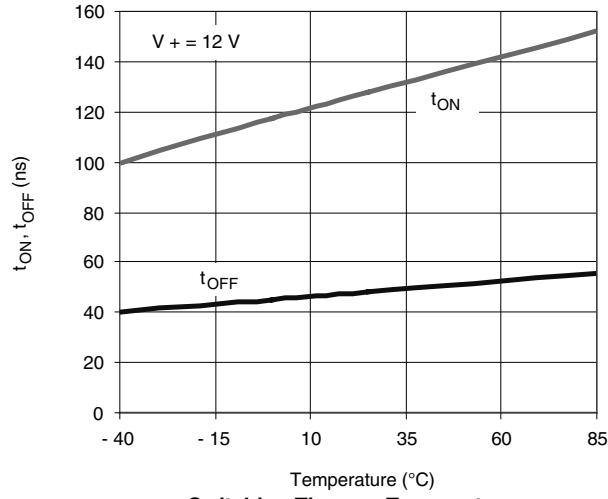




Switching Time vs. Temperature

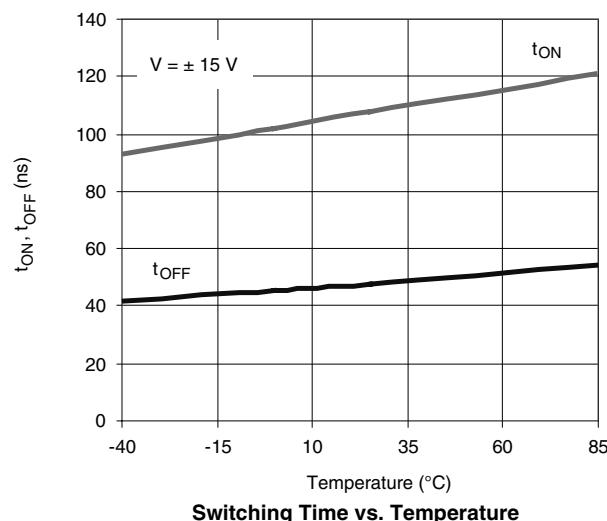


Switching Time vs. Temperature

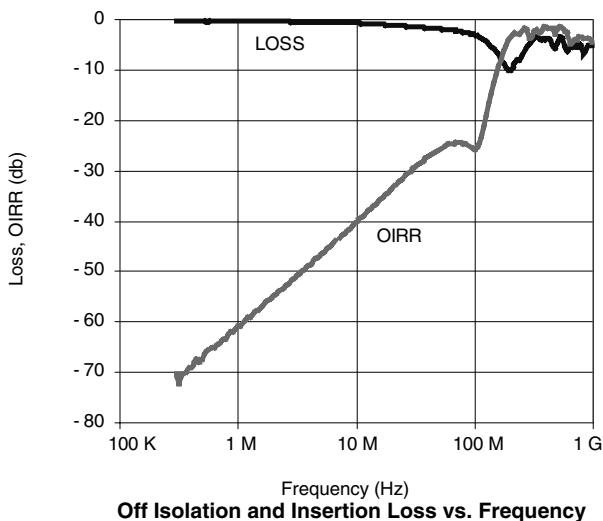

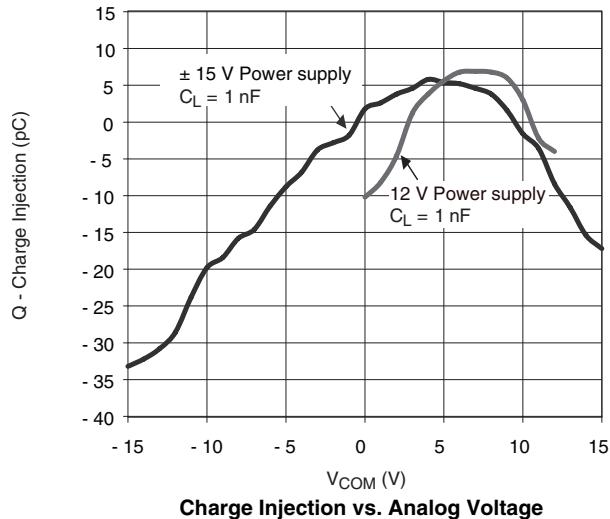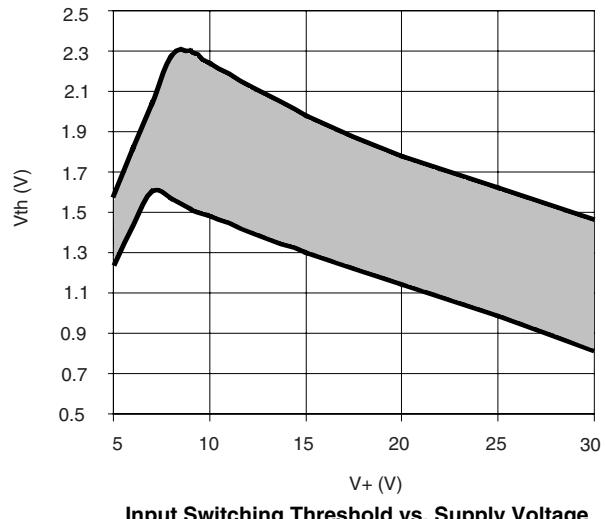
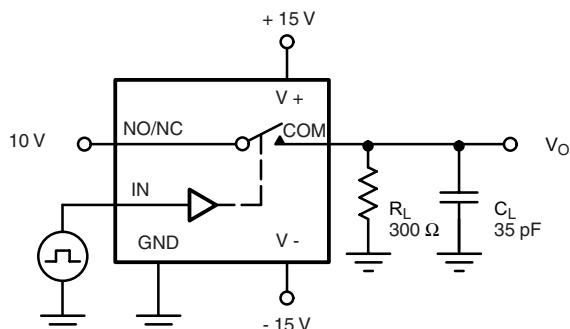
Off Isolation and Insertion Loss vs. Frequency

TYPICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, unless otherwise noted

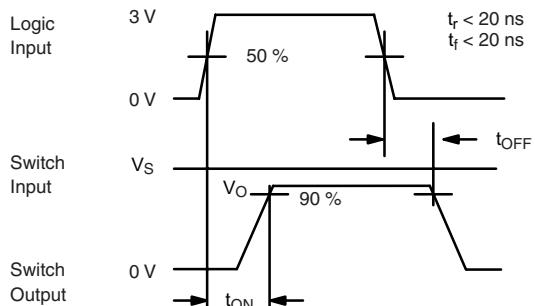Charge Injection vs. Analog Voltage

Input Switching Threshold vs. Supply Voltage
TEST CIRCUITS
 V_O is the steady state output with the switch on.

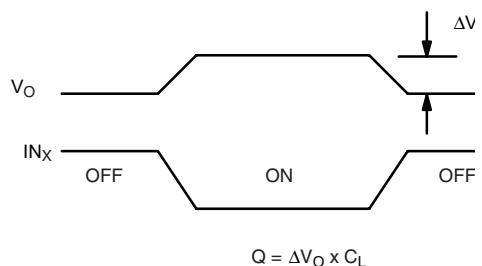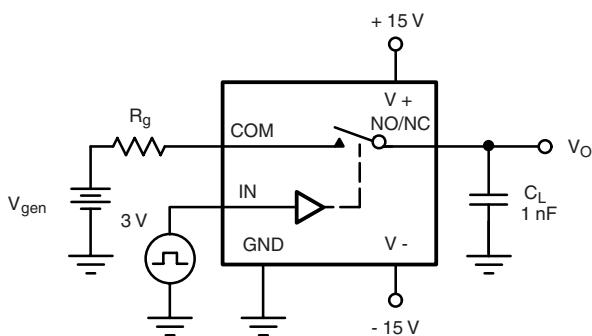 C_L (includes fixture and stray capacitance)

$$V_O = V_S \frac{R_L}{R_L + r_{ON}}$$



Note: Logic input waveform is inverted for switches that have the opposite logic sense.

Figure 1. Switching Time

Figure 2. Charge Injection

DG447/448

Vishay Siliconix



TEST CIRCUITS

V_O is the steady state output with the switch on.

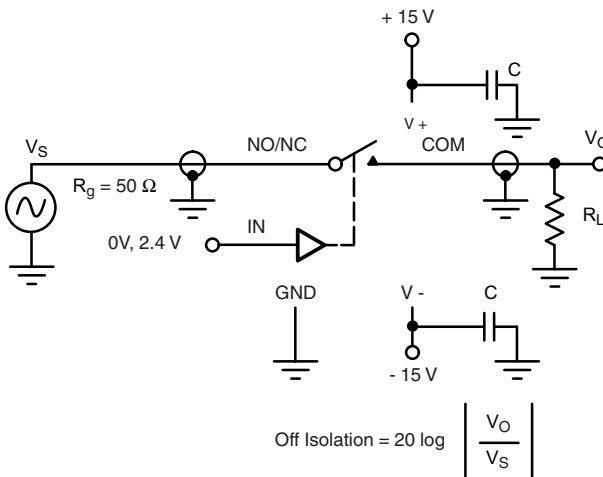


Figure 3. Off Isolation

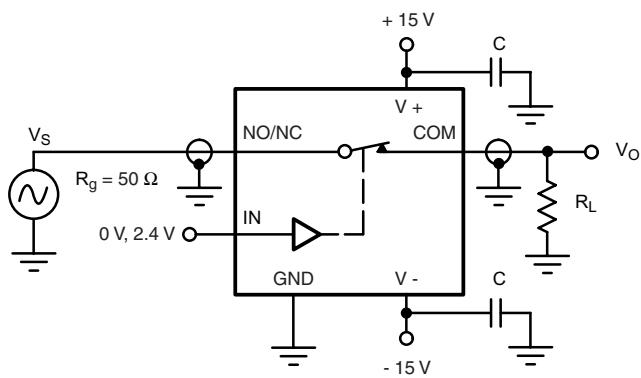


Figure 4. Insertion Loss

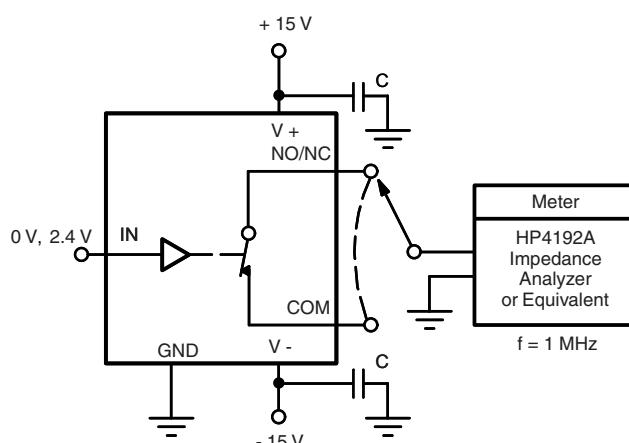


Figure 5. Source/Drain Capacitances



Legal Disclaimer Notice

Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.