

273-260, 273-272, 273-296
273-284.


Subminiature Code Switches

Specifications:


Contact rating:	50 V DC, 100 mA, non-switching 15 V DC, 30 mA, switching
Contact resistance:	<100 mΩ
Insulation resistance:	> 1000 MΩ at 250 V DC
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Temperature range:	- 25° to +75° C
Mechanical life:	minimum 20 000 operations
Contacts/Terminals:	Phosphor bronze, gold-flashed over nickel barrier
Case-Material:	PBTP black, rotor: standard types yellow; inverse types red
Construction:	Case totally sealed, suitable for washing by immersion
Method of mounting:	on pc-board

Models: Code


DRS 3010	BCD
DRS 3110	BCD Inverse
DRS 3016	Hexadecimal
DRS 3116	Hexadecimal Inverse

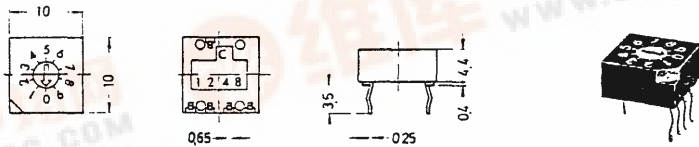


DRS 4010	BCD
DRS 4110	BCD Inverse
DRS 4016	Hexadecimal
DRS 4116	Hexadecimal Inverse

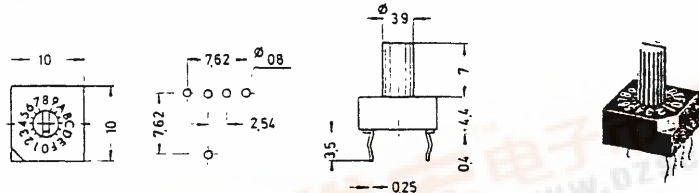

DRR 3010	BCD
DRR 3110	BCD Inverse
DRR 3016	Hexadecimal
DRR 3116	Hexadecimal Inverse

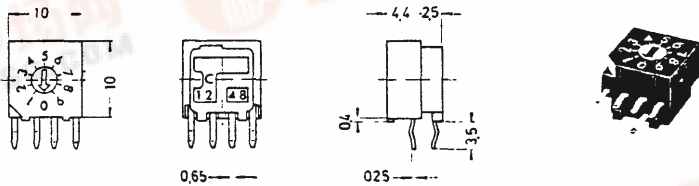

DRR 4010	BCD
DRR 4110	BCD Inverse
DRR 4016	Hexadecimal
DRR 4116	Hexadecimal Inverse

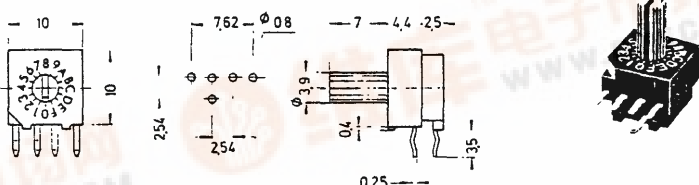

Accessories:

Cap	
yellow	KR 108
red	KR 109
white	KR 110



cut out shows position

