



DATA SHEET

ED1002CS~ED1006CS

SURFACE MOUNT SUPER FAST RECOVERY RECTIFIER

VOLTAGE 200 to 600 Volts **CURRENT** 10 Amperes

TO-252 / DPAK

Unit : inch (mm)

FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- Both normal and Pb free product are available :
Normal : 80~95% Sn, 5~20% Pb
Pb free: 98.5% Sn above

MECHANICAL DATA


Case: D PAK/TO-252 molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode

Standard packaging: 16mm tape (EIA-481)

Weight: 0.015 ounce, 0.4 gram.

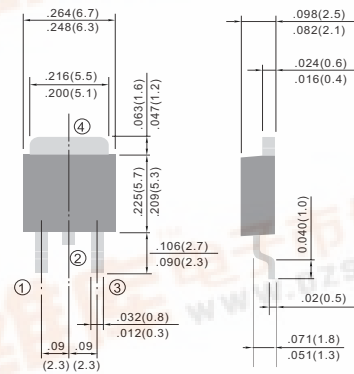

MAXIMUM RATING AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

PARAMETER	SYMBOL	ED1002CS	ED1003CS	ED1004CS	ED1006CS	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	300	400	600	V
Maximum RMS Voltage	V_{RMS}	140	210	280	420	V
Maximum DC Blocking Voltage	V_{DC}	200	300	400	600	V
Maximum Average Forward Current .375" (9.5mm) lead length at $T_c=100^{\circ}C$	I_{AV}	10.0				A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100				A
Maximum Forward Voltage at 5.0A	V_F	0.95	1.3		1.7	V
Maximum DC Reverse Current $T_A=25^{\circ}C$ at Rated DC Blocking Voltage $T_A=100^{\circ}C$	I_R		5.0			μA
			50			
Maximum Reverse Recovery Time (Note 1)	T_{RR}		35			ns
Maximum thermal Resistance (Note 2)	$R_{\theta JC}$ $R_{\theta JA}$		11 80			$^{\circ}C / W$
Operating and Storage Temperature Range T_J, T_{STG}	T_J, T_{STG}	-55 TO +150				$^{\circ}C$

NOTES:

1. Reverse Recovery Test Conditions: $I_F=.5A$, $I_R=1A$, $I_{rr}=.25A$.
2. Mounted on P.C. Board with 14mm2 (.013mm thick) copper pad areas.
3. Both Bonding and Chip structure are available.

RATING AND CHARACTERISTIC CURVES

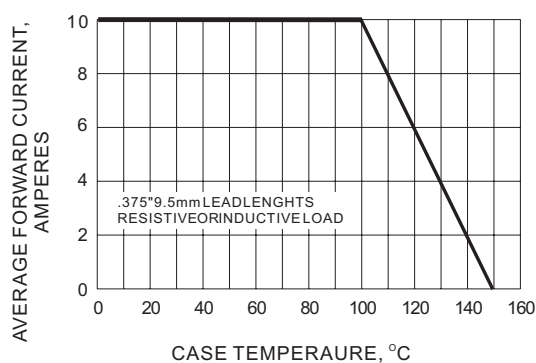


Fig.1- FORWARD CURRENT DERATING CURVE

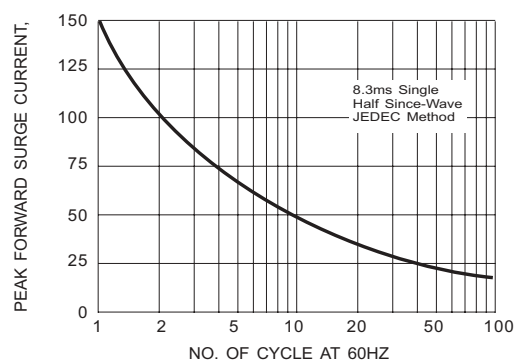


Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT

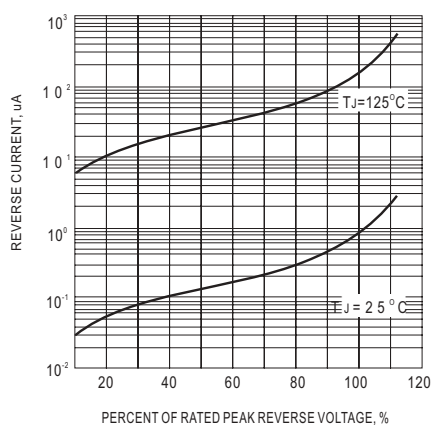


Fig.3- TYPICAL REVERSE CHARACTERISTIC

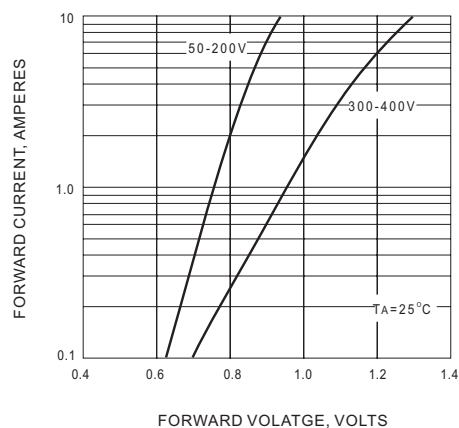


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC