





Preliminary Data Sheet

Description

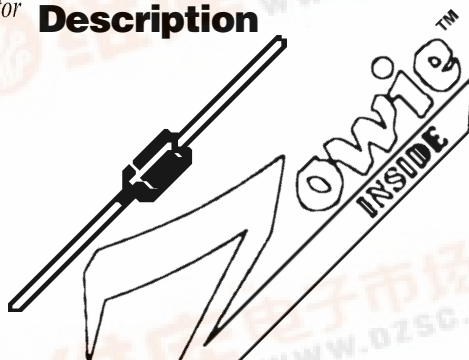

1.5 Amp Glass Passivated Sintered Fast Efficient Rectifiers

Mechanical Dimensions

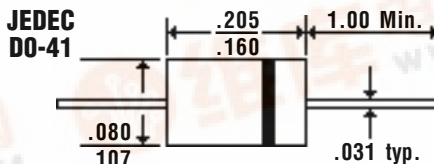

Features

- LOWEST COST FOR GLASS SINTERED FAST EFFICIENT CONSTRUCTION
- LOWEST V_F FOR GLASS SINTERED FAST EFFICIENT CONSTRUCTION
- TYPICAL $I_R < 100$ nAmps
- 1.5 AMP OPERATION @ $T_A = 55^\circ\text{C}$, WITH NO THERMAL RUNAWAY
- SINTERED GLASS CAVITY-FREE JUNCTION

EGPZ15A ... 15M Series


Electrical Characteristics @ 25°C.	EGPZ15A . . . 15M Series							Units
Maximum Ratings	15A	15B	15D	15G	15J	15K	15M	
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	200	400	600	800	1000	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	280	420	560	700	Volts
DC Blocking Voltage... V_{DC}	50	100	200	400	600	800	1000	Volts
Average Forward Rectified Current... $I_{F(av)}$ Current 3/8" Lead Length @ $T_A = 55^\circ\text{C}$				1.5				Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} 8.3ms, 1/2 Sine Wave Superimposed on Rated Load				50				Amps
Forward Voltage @ Rated Forward Current and 25°C... V_F	< 1.0 >			1.3	< 1.7 >			Volts
DC Reverse Current... $I_{R(max)}$ @ Rated DC Blocking Voltage				5.0				μAmps
				100				μAmps
Typical Junction Capacitance... C_j (Note 1)				25				pF
Maximum Thermal Resistance... $R_{\theta JA}$ (Note 2)				30				$^\circ\text{C/W}$
Maximum Reverse Recovery Time... t_{RR} (Note 3)	< 50 >				< 75 >			nS
Operating & Storage Temperature Range... T_J, T_{STRG}				-65 to 150				$^\circ\text{C}$



Preliminary Data Sheet

1.5 Amp Glass Passivated Sintered Fast Efficient Rectifiers

EGPZ15A ... 15M Series

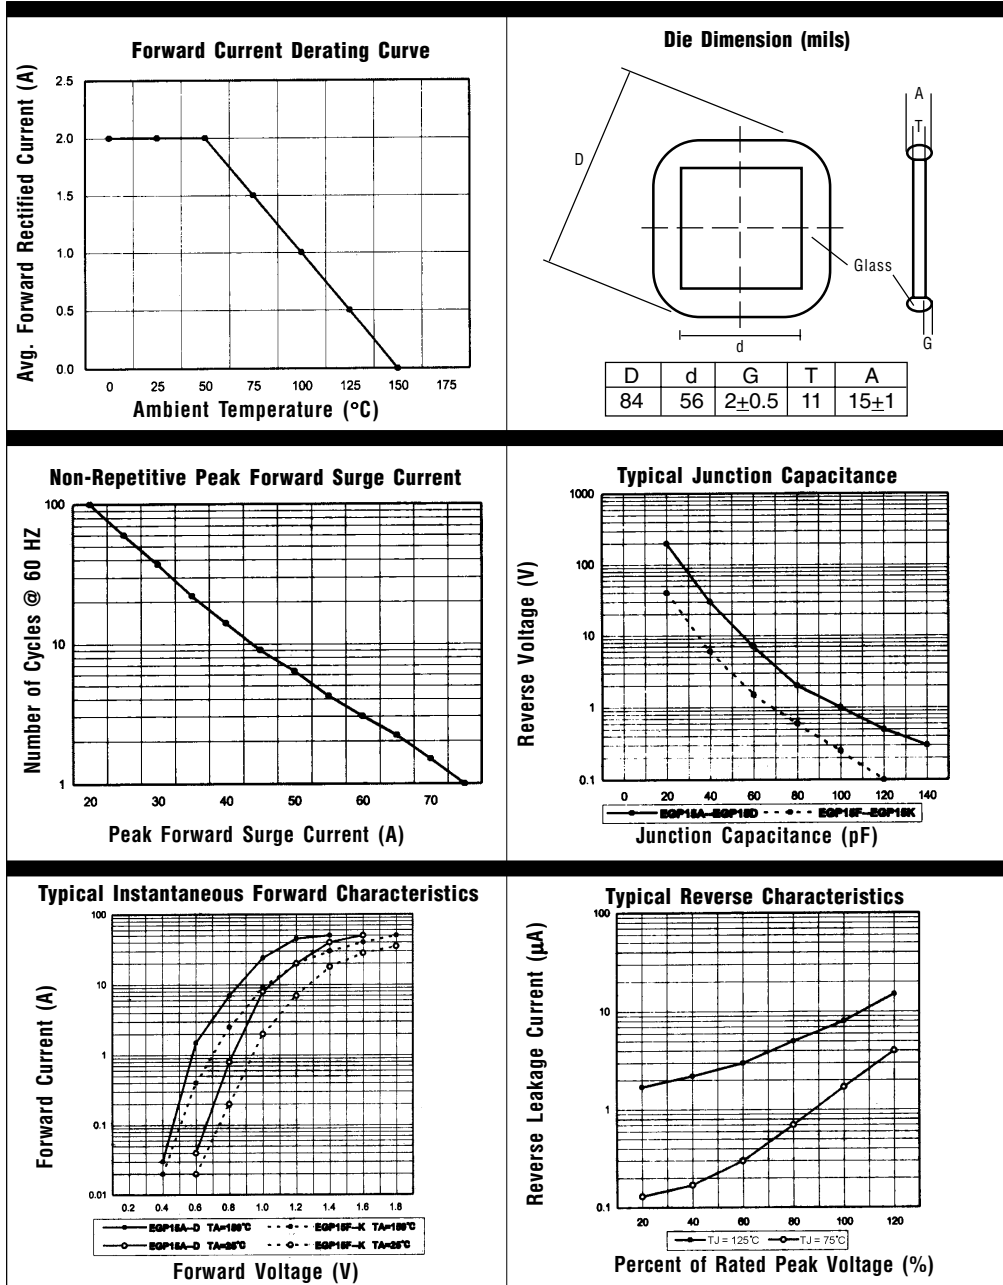

NOTES: 1. Measured @ 1 MHZ and applied reverse voltage of 4.0V.

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.