


ENERGIZER NO. EN91

AA




Industry Standard Dimensions in mm (inches)

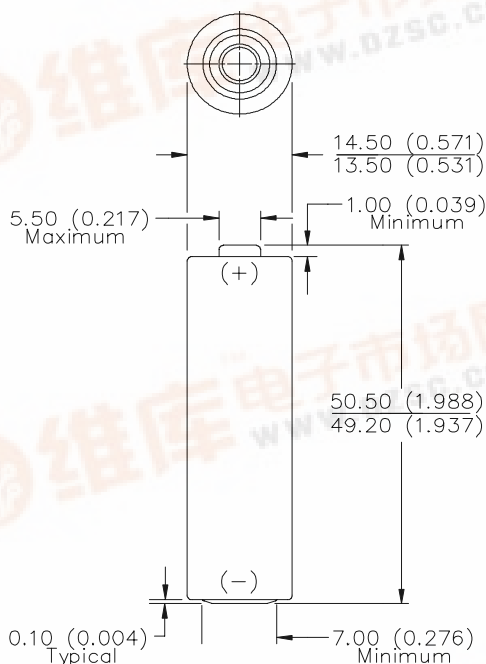


NOT INTENDED FOR RETAIL TRADE

- Chemical System:** Alkaline
Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)
- Designation:** ANSI-15A, IEC-LR6
- Battery Voltage:** 1.5 Volts
- Internal Resistance:** 146 Milliohms (Fresh)
- Operating Temp:** -18°C to 55°C (0°F to 130°F)
- Average Capacity:** 2,779 mAh (to 0.8 volts)
(Rated capacity at 25 mA continuous drain)
- Average Weight:** 23.0 grams (0.8 oz.)
- Volume:** 8.1 cubic centimeters (0.5 cubic inch)
- Cell:** One No. 3-315 (size 'AA')
- Jacket:** Plastic Label
- Shelf Life:** 7 years (80% of rated capacity)


TEMPERATURE EFFECTS Typical Service to 0.8 Volts

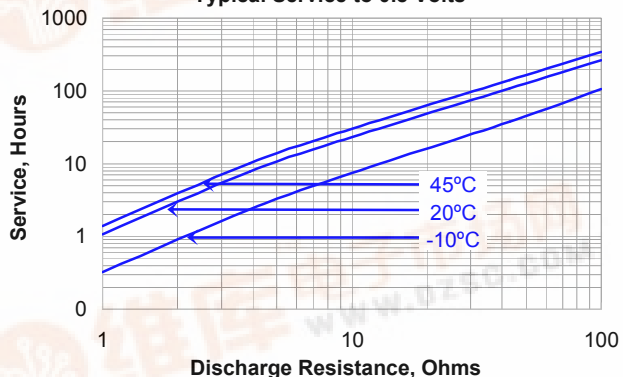

CONSTANT RESISTANCE PERFORMANCE Typical Service

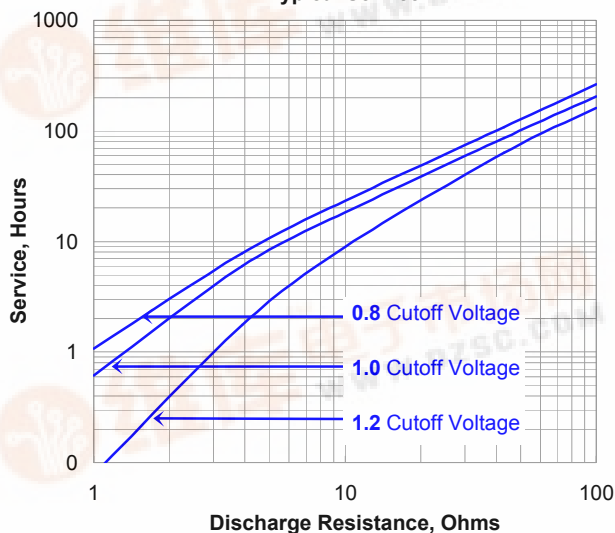

CONSTANT CURRENT DISCHARGE Typical Service

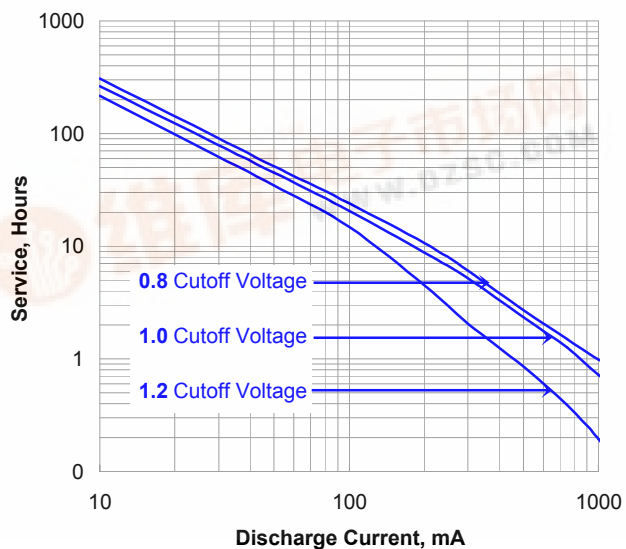

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.


Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved




ENERGIZER NO. EN91

CONSTANT POWER DISCHARGE
Typical Service

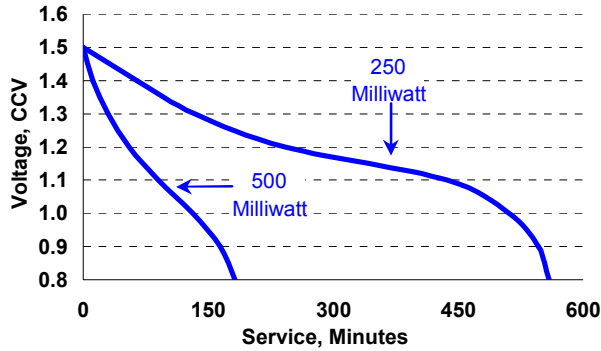


CONSTANT POWER DISCHARGE
Typical Service

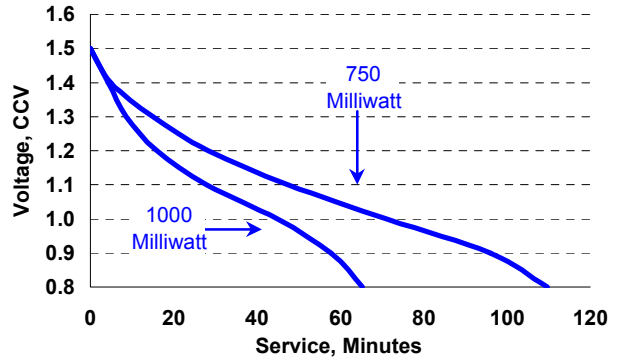


Industry Standard Tests @ 20° C


RADIO
43 ohm - 4 hours/day

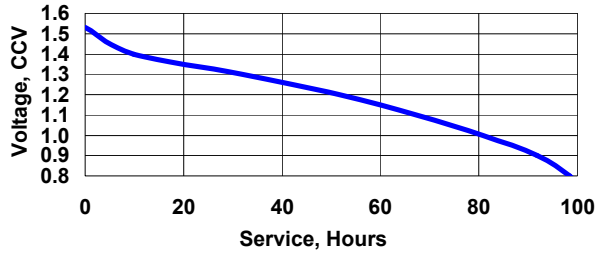


LIGHTING
3.3 ohm - LIF

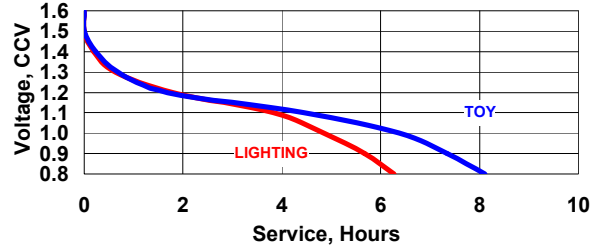


REMOTE
24 ohm - 15 spm - 8 hr/day

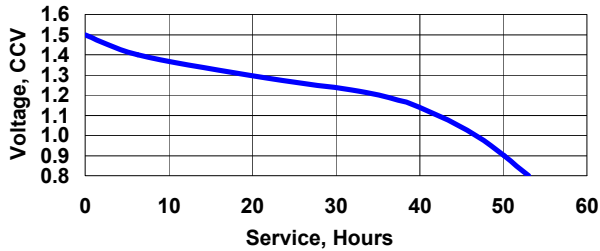

TAPE PLAYER
100 mA - 1 hr/day

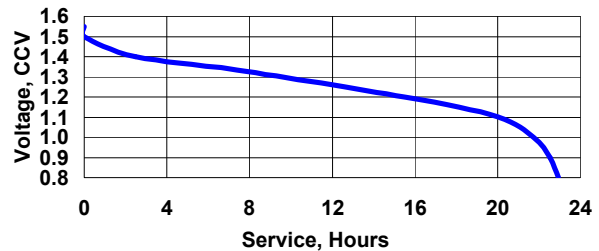


CD / MD / ELEC GAME
250 mA - 1 hr/day

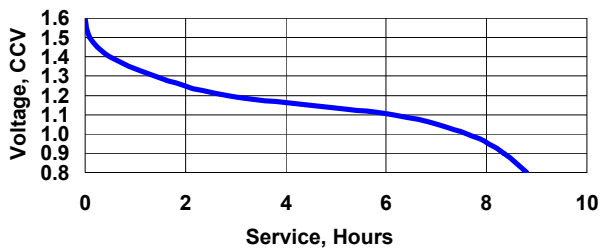

DIGITAL CAMERA
1.5/6.5K mW 2/28s
10X/hr

PHOTO
1000 mA 10 sec/min
1 hr/day

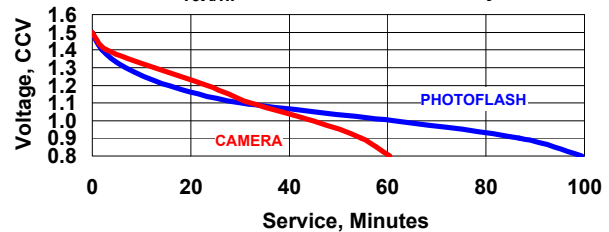

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved