




Common Mode Choke

EPA3482S




- Ideal for LAN Applications
- For use with 10Base-T, Token Ring and 100 MBPS
- High Frequency Choke for EMI Reduction


Electrical Parameters @ 25° C

OCL (μ H Min.)	Turns Ratio ($\pm 1\%$)	DCR (Ω Max.)	Hipot (Vrms)
@ 100 KHz, 100m Vrms			for 1 minute
40	1:1	0.6	500

Schematic

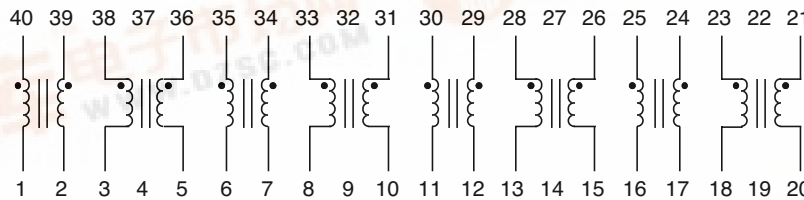

Package

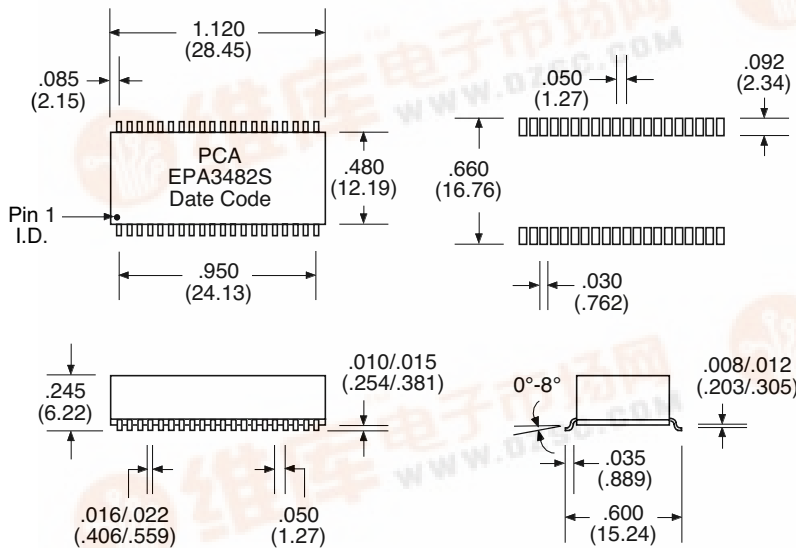

Impedance Vs. Frequency

