


Power Choke

EPZ3001G




- Noise Suppression Choke
- UL94V-0 Recognized Components
- UL1446 Class B Insulation Systems
- 2.5 A Max. Rated Current
- 10K PERM Materials
- 500 Vrms Isolation


Electrical Parameters @ 25° C

Inductance (mH Min.)	Inductance (mH Min.) @ 2 mA DC Bias	DCR (mΩ Max.)	Turns Ratio	SRF (MHz Typ.)	Temp. Rise @ 2.5 A (°C Typ.)
@10 KHz, 0.1 Vrms	@1 KHz, 0.1 Vrms	Matched with ± 5%			
3.0	2.4	80	1 : 1	1.0	42
Pins 1-2, 3-4	Pins 1-2, 3-4	Pins 1-2, 3-4	Pins 1-2 : 3-4		


Schematic



Impedance (mp)

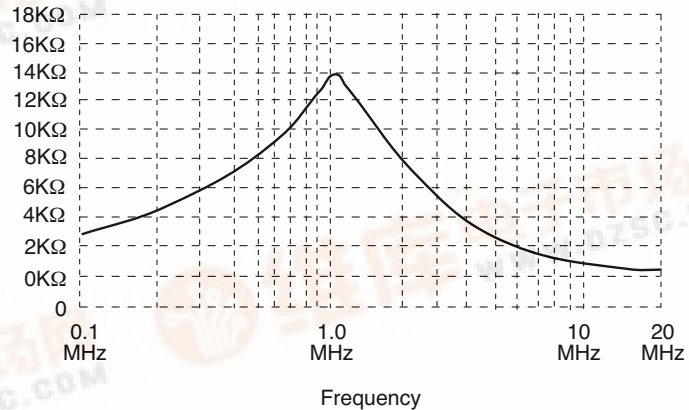

Package

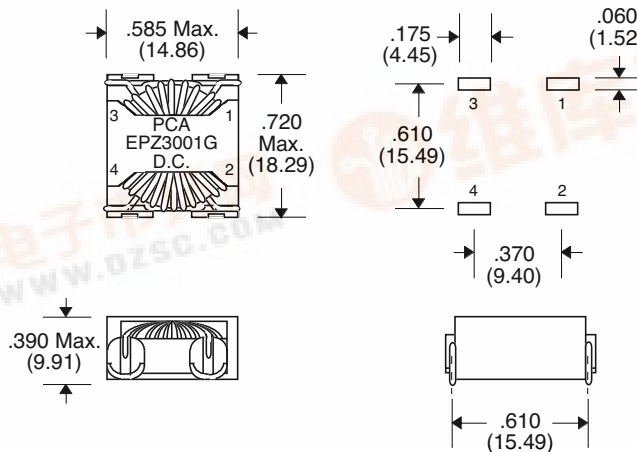

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25

Product performance is limited to specified parameters. Data is subject to change without prior notice.

CSZ3001G Rev. 3 10/27/03

TEL: (818) 892-0761

FAX: (818) 894-5791



PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HAVILL, CA 91343