


ESAC83-004 (20A)

(40V / 20A)

SCHOTTKY BARRIER DIODE

■ Outline drawings, mm

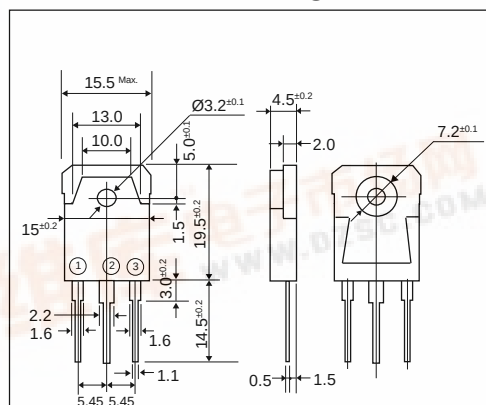

JEDEC	—
EIAJ	SC-65


■ Features

- Low V_F
- Super high speed switching
- High reliability by planer design

■ Applications

- High speed power switching

■ Connection diagram

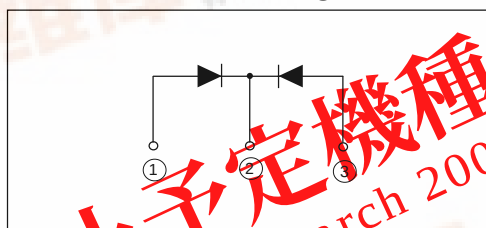

Maximum ratings and characteristics

- Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		40	V
Non-repetitive peak reverse voltage	V_{RSM}	tw=500ns, duty=1/40	48	V
Average output current	I_o	Square wave, duty=1/2 Tc=119°C	20*	A
Surge current	I_{FSM}	Sine wave 10ms	120	A
Operating junction temperature	T_j		-40 to +150	°C
Storage temperature	T_{stg}		-40 to +150	°C

* Average forward current of centertap full wave connection

- Electrical characteristics (Ta=25°C Unless otherwise specified)







Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_{FM}	$I_{FM}=8A$	0.55	V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	15	mA
Thermal resistance	$R_{th(j-c)}$	Junction to case	1.5	$^{\circ}C/W$



(40V / 20A)



ESAC83-004 (20A)

Characteristics

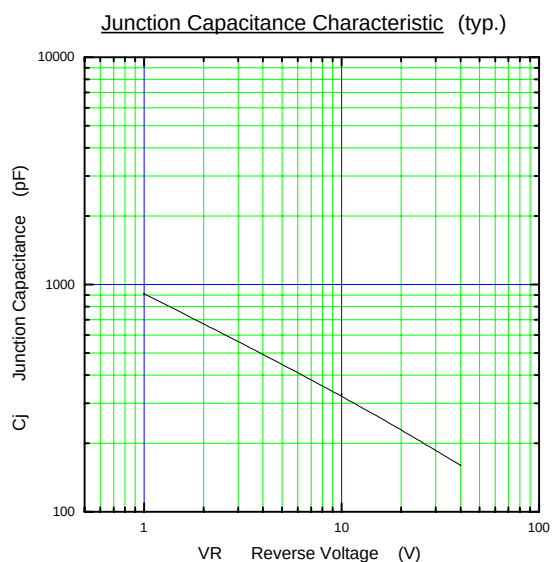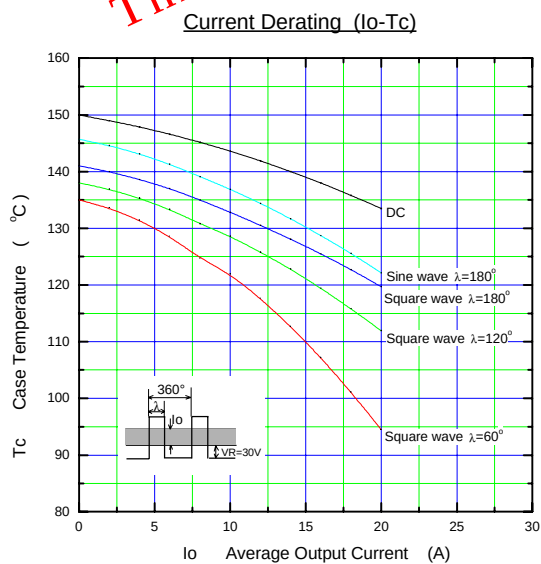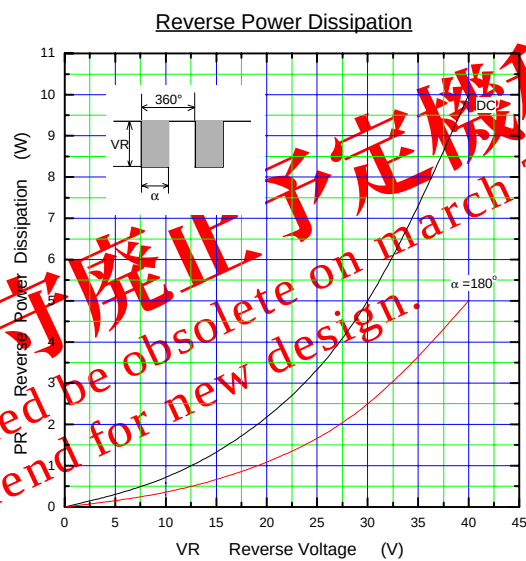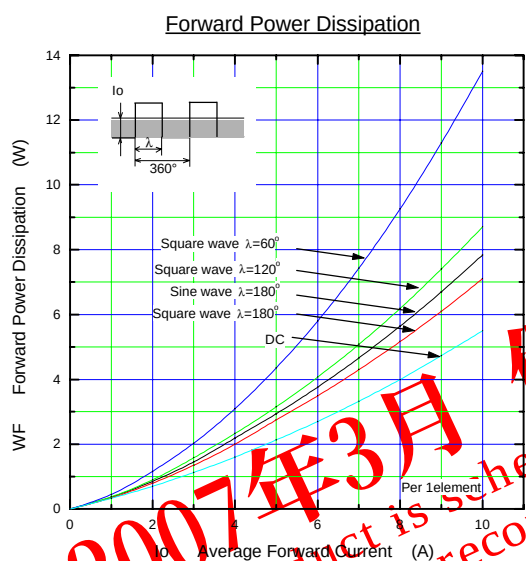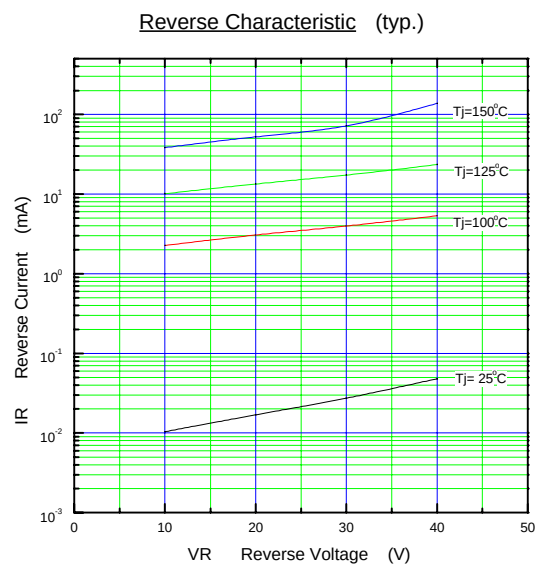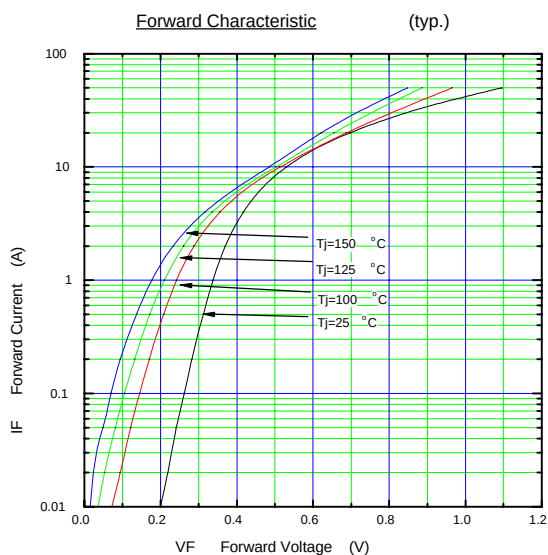

(40V / 20A)

ESAC83-004 (20A)

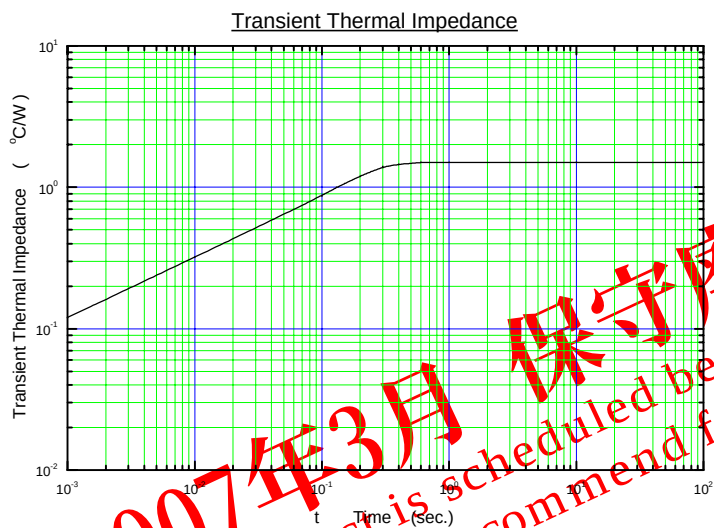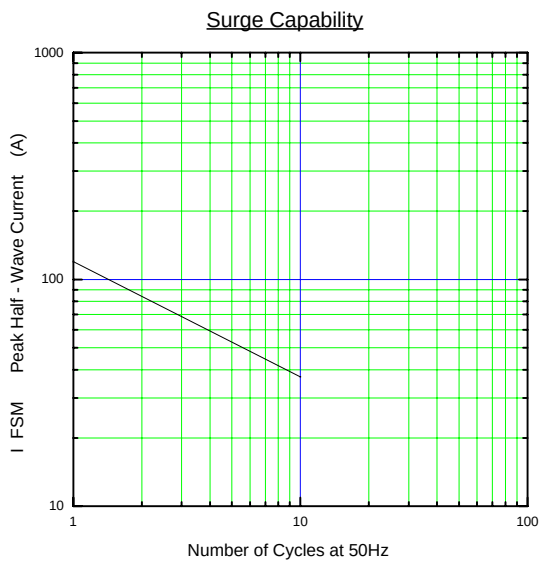

2007年3月 保守廃止予定機種
This product is scheduled to be obsolete on march 2007.
Not recommend for new design.