

# microSD/TF Card Connector FCN-260 Series

**RoHS compliant**

microSD is currently the world's smallest memory card storage system, specifically designed for use with ultra-small mobile phones and other devices. Like the miniSD, the microSD/TransFlash is ideal for use in storing media-rich files such as music, videos, and photographs in compatible mobile phones.

Fujitsu's microSD connector offers the lowest profile height (1.65mm) currently available in the market.

Featuring Fujitsu's precise and insert molding technology, the FCN-560 series micro SD connector measures 15mm (D) x 14mm (W) x 1.6mm (H) and has a life cycle of ten thousand insertions/withdrawals.

Fujitsu's connector uses a proprietary push-push structure that provides positive tactile feedback during card insertion and withdrawal.

A card drop protection mechanism prevents the card from falling out during pre-insertion and forced card extraction after it's locked in. When ejected, the card travels 3.5mm from its locked position.



## FEATURES

- Reduction in size and weight (15 (D) x 14 (W) x 1.65 (H)mm) with unique push-push structure
- Half-lock to prevent forced card extraction, good operability with sense of click for insertion
- Smooth card inserion/withdrawl with unique drop-protection mechanism
- With card detections switch
- Card ejection distance 3.5mm
- FCN-568Z008-G/0M

Item	Specification
Operating temperature range	-20°C to +70°C
Current rating	AC 0.5A
Voltage rating	AC/DC 5V
Contact resistance	100mΩ maximum
Dielectric withstanding voltage	AC 500V for 1 minute
Insertion/Withdrawl life	10,000 cycles


Item	Specification
Insulating material	LCP, UL94 V-0
Contact	Copper Alloy Plating NiPdAu
Pin / Spring	SWPA
Metal Cover	Stainless steel

Tape and reel: 1, 500 pcs/reel




# microSD/TF Card Connector

## SPECIFICATIONS

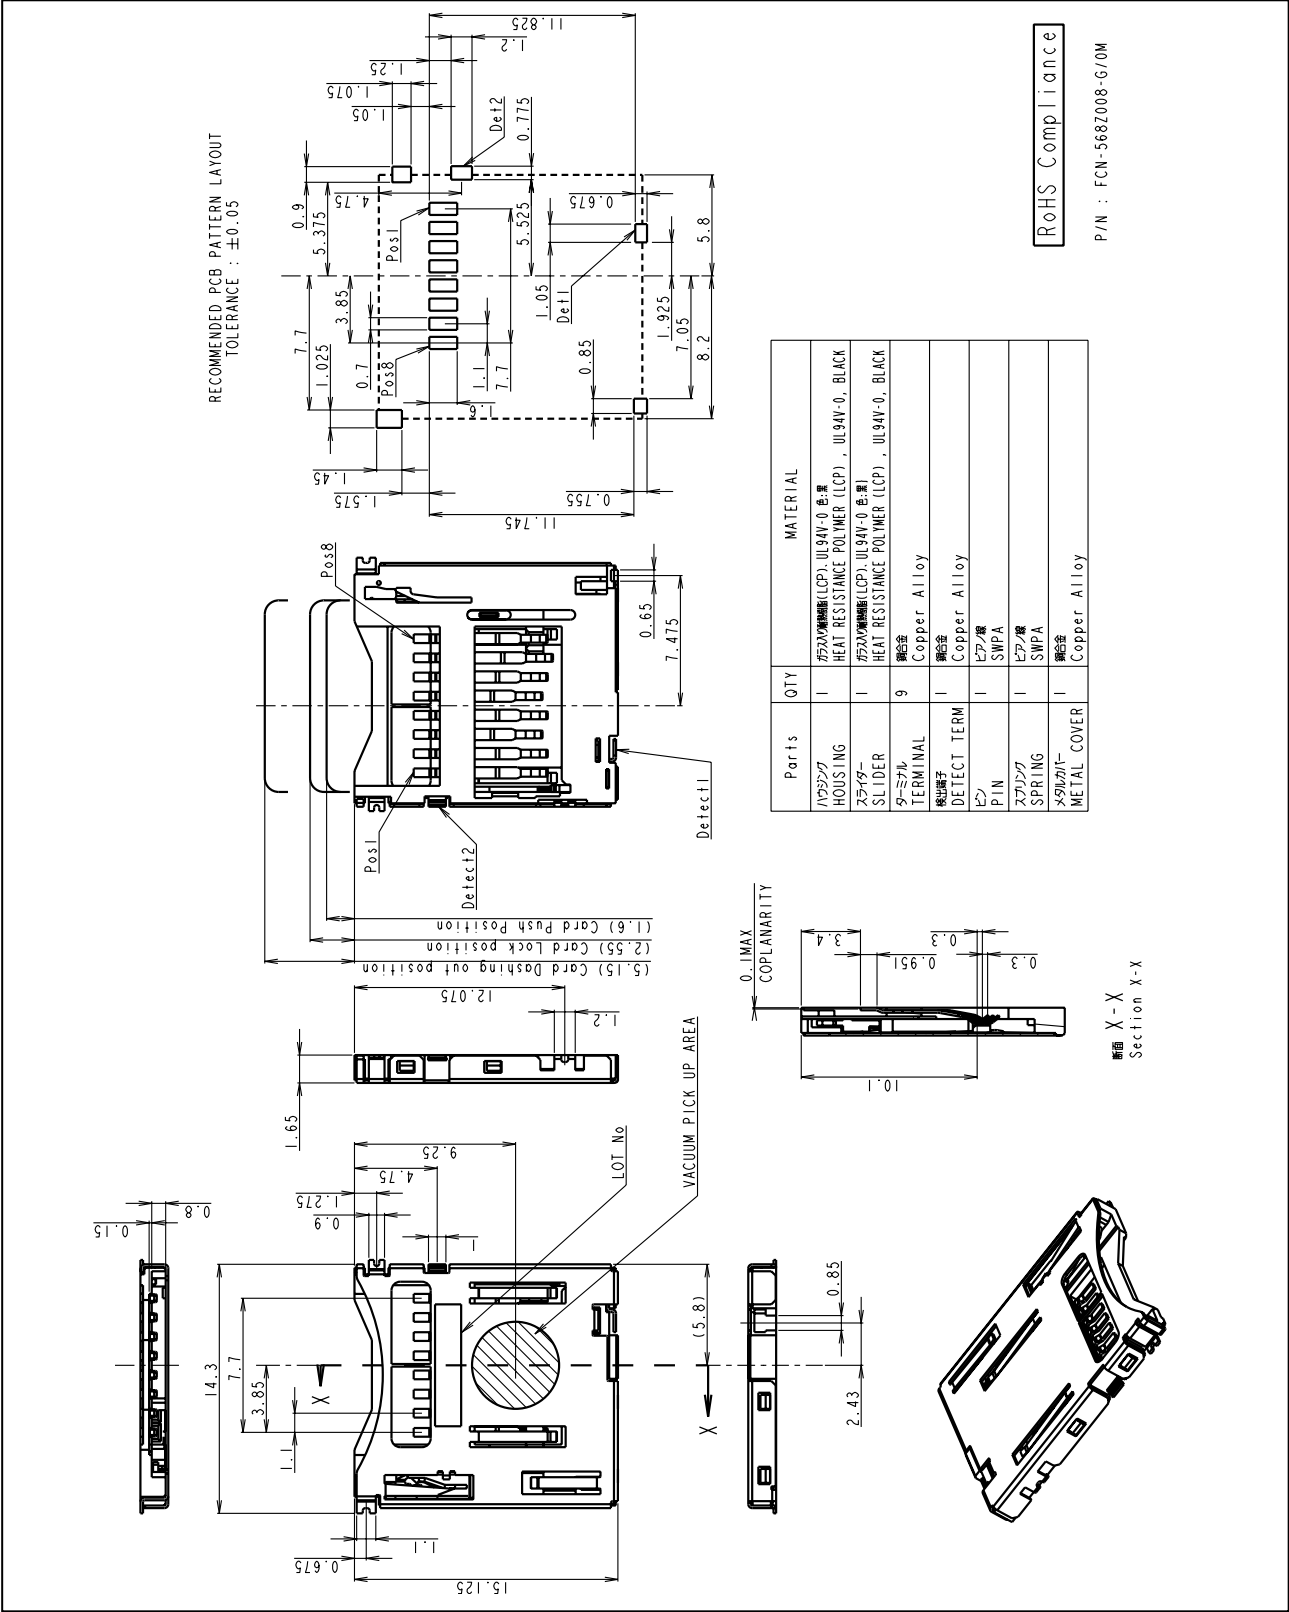

# microSD/TF Card Connector

## SPECIFICATIONS

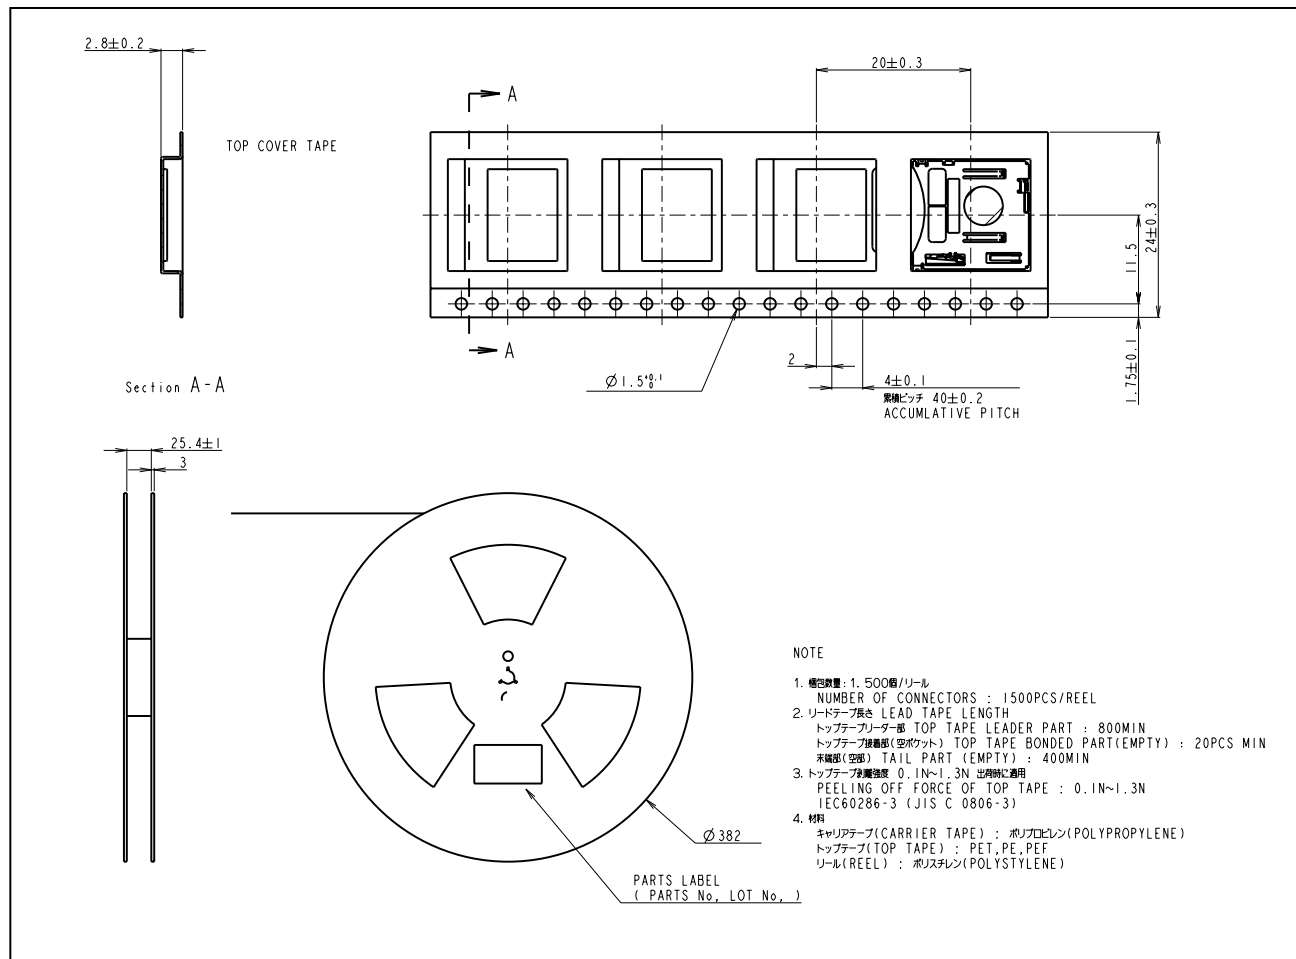

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141 8630, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@fcl.fujitsu.com](mailto:promothq@fcl.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://us.fujitsu.com/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hooftdorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2007 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Rev. April 26, 2007.