


FEATURES

- Low Noise Figure: $NF = 1.6\text{dB}$ (Typ.) @ $f=30\text{ GHz}$
- High Associated Gain: $G_{AS} = 13\text{dB}$ (Typ.) @ $f=30\text{ GHz}$
- Wide Frequency Band: 27-32 GHz
- Impedance Matched $Z_{in}/Z_{out} = 50\Omega$

DESCRIPTION

The FMM5702X is a LNA MMIC designed for applications in the 27-32 GHz frequency range. This product is well suited for satellite communications and radio link applications where low noise and high gain is required.

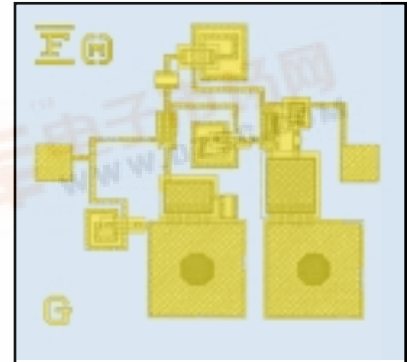

ABSOLUTE MAXIMUM RATING (Ambient Temperature $T_a=25^\circ\text{C}$)

Item	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V_{DD}		5	V
Input Power	P_{in}		-4	dBm
Storage Temperature	T_{stg}		-65 to +175	$^\circ\text{C}$
Operating Backside Temperature	T_{op}		-45 to +125	$^\circ\text{C}$

Fujitsu recommends the following conditions for the long term reliable operation of GaAs FETs:

1. The drain-source operating voltage (V_{DD}) should not exceed 4 volts.
2. This product should be hermetically packaged.

ELECTRICAL CHARACTERISTICS (Ambient Temperature $T_a=25^\circ\text{C}$)

Item	Symbol	Conditions	Limits			Unit
			Min.	Typ.	Max.	
Noise Figure	NF	$V_{DD} = 4\text{V}$ $f = 30.0\text{ GHz}$ $I_{DD} = 5\text{mA}$ (Typ.) $Z_S = Z_L = 50\Omega$	-	1.6	2.0	dB
Associated Gain	G_{AS}		11.0	13.0	-	dB
Input Return Loss	RL_{in}		-	-12	-	dB
Output Return Loss	RL_{out}		-	-9	-	dB

Note: RF parameter sample size 10pcs. Criteria (accept/reject)=(0/1)

27-32GHz LNA MMIC

RF in

RFout
VDD Input

Unit: mm
Thickness: 0.254mm
 ϵ_r : 2.17

FMM5702X

27-32GHz LNA MMIC

S-PARAMETERS

$V_{DD} = 4V$, $I_{DS} = 5mA$


FREQUENCY (MHZ)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
500	.924	173.6	.064	72.8	.0003	-88.4	.830	-11.1
1000	.921	167.4	.103	76.0	.0001	139.6	.787	-16.8
1500	.918	161.3	.153	79.2	.0002	113.6	.749	-22.3
2000	.917	155.2	.215	79.7	.0005	134.4	.710	-27.2
2500	.916	149.2	.290	78.2	.0007	107.7	.675	-31.4
3000	.915	143.3	.378	75.2	.0007	111.3	.645	-35.1
3500	.916	137.3	.481	70.9	.0011	86.5	.619	-38.5
4000	.917	131.4	.597	66.0	.0006	87.9	.598	-41.6
4500	.919	125.6	.730	60.4	.0011	69.8	.582	-44.8
5000	.921	119.8	.880	54.3	.0015	75.9	.567	-48.0
5500	.924	113.8	1.048	47.6	.0013	78.0	.555	-51.2
6000	.926	108.1	1.238	40.8	.0014	69.6	.544	-54.6
6500	.928	102.3	1.450	33.6	.0014	55.4	.535	-58.3
7000	.932	96.5	1.690	26.1	.0017	54.7	.526	-62.0
7500	.934	90.7	1.964	18.1	.0015	59.7	.518	-66.2
8000	.936	84.9	2.267	9.8	.0017	52.2	.510	-70.7
8500	.936	78.9	2.618	0.9	.0013	65.2	.498	-75.7
9000	.938	73.1	2.998	-8.3	.0021	62.6	.487	-81.0
9500	.936	67.2	3.410	-18.0	.0021	78.3	.472	-86.6
10000	.932	61.4	3.877	-28.5	.0026	75.6	.454	-93.1
10500	.928	55.3	4.317	-39.5	.0029	82.1	.430	-99.7
11000	.920	49.7	4.868	-51.4	.0036	80.4	.401	-107.4
11500	.910	43.8	5.313	-63.7	.0047	73.8	.366	-115.0
12000	.895	38.2	5.833	-76.8	.0051	74.8	.320	-123.5
12500	.887	32.7	6.146	-90.0	.0069	69.4	.270	-130.5
13000	.867	27.3	6.465	-103.4	.0073	63.2	.217	-137.9
13500	.859	22.6	6.713	-116.8	.0088	56.1	.166	-141.9
14000	.843	16.8	6.623	-129.2	.0094	53.5	.113	-141.2
14500	.843	12.6	6.905	-142.5	.0104	43.1	.074	-134.6
15000	.829	6.9	6.768	-154.0	.0110	41.4	.052	-101.9
15500	.829	1.7	6.828	-166.1	.0118	34.1	.060	-69.9
16000	.822	-3.9	6.711	-176.9	.0128	31.4	.086	-57.7
16500	.809	-10.0	6.557	-172.8	.0134	27.2	.113	-54.0
17000	.796	-15.6	6.440	-162.9	.0151	24.2	.132	-58.2
17500	.784	-21.8	6.354	-153.0	.0155	21.2	.154	-59.9
18000	.771	-27.8	6.317	-143.2	.0162	16.6	.169	-62.9
18500	.753	-34.3	6.246	-133.8	.0176	13.2	.185	-67.6
19000	.732	-41.1	6.137	-124.7	.0181	10.1	.197	-71.4
19500	.711	-47.5	6.031	-115.6	.0196	8.0	.211	-77.0
20000	.683	-54.6	5.971	-106.9	.0210	5.0	.218	-81.7
20500	.656	-61.5	5.852	-98.2	.0224	2.9	.230	-87.5
21000	.625	-69.0	5.774	-89.6	.0238	0.1	.237	-92.2
21500	.591	-76.3	5.710	-80.9	.0259	-3.8	.242	-98.0
22000	.562	-84.3	5.587	-72.7	.0272	-5.6	.254	-103.9
22500	.519	-92.1	5.597	-63.8	.0298	-10.9	.250	-110.7
23000	.493	-100.1	5.489	-55.0	.0311	-14.1	.256	-115.9
23500	.451	-109.6	5.405	-46.9	.0330	-17.9	.256	-121.5
24000	.422	-118.4	5.298	-38.2	.0350	-20.9	.261	-128.7
24500	.388	-129.0	5.213	-30.0	.0375	-24.5	.265	-135.0
25000	.351	-139.9	5.148	-21.8	.0395	-28.8	.268	-142.3
25500	.319	-150.4	5.095	-13.1	.0416	-32.9	.272	-149.9
26000	.297	-163.3	4.976	-4.9	.0439	-36.8	.274	-156.5
26500	.269	-177.0	4.915	-3.7	.0461	-41.8	.279	-165.2
27000	.256	169.3	4.798	-11.9	.0482	-45.7	.282	-171.5
27500	.244	156.0	4.740	-20.6	.0507	-49.5	.284	-177.2
28000	.237	139.4	4.619	-29.0	.0526	-55.1	.295	-171.1
28500	.242	126.3	4.455	-37.4	.0545	-59.2	.296	-163.6
29000	.244	111.4	4.377	-45.5	.0566	-63.5	.310	-156.6
29500	.259	98.8	4.221	-53.9	.0593	-68.0	.314	-147.2
30000	.261	86.1	4.138	-62.4	.0609	-73.3	.329	-138.6
35000	.275	76.4	3.950	-70.6	.0625	-77.6	.332	-130.5
31000	.286	66.3	3.838	-78.9	.0643	-82.5	.349	-121.8
31500	.301	57.1	3.660	-86.8	.0664	-87.4	.355	-114.2
32000	.310	49.5	3.504	-94.8	.0674	-91.8	.367	-105.8
32500	.320	41.6	3.364	-102.5	.0691	-96.9	.380	-99.2
33000	.327	34.3	3.208	-110.1	.0707	-101.6	.385	-91.1
33500	.331	27.3	3.077	-117.8	.0711	-107.3	.400	-84.2
34000	.331	20.9	2.931	-125.3	.0716	-112.0	.409	-76.8
34500	.329	15.8	2.772	-132.6	.0724	-117.4	.420	-70.3
35000	.327	10.9	2.633	-139.7	.0730	-121.3	.425	-63.7
35500	.328	6.7	2.489	-146.6	.0735	-127.2	.435	-57.3
36000	.322	2.3	2.364	-153.3	.0733	-132.0	.440	-51.6
36500	.324	-1.3	2.228	-159.4	.0739	-137.0	.446	-46.1
37000	.315	-5.0	2.125	-165.8	.0726	-141.4	.454	-40.9
37500	.311	-8.2	2.015	-172.0	.0728	-145.8	.459	-35.4
38000	.306	-11.0	1.915	-177.9	.0725	-150.3	.466	-30.5
38500	.298	-13.3	1.830	-175.9	.0724	-154.7	.474	-25.5
39000	.294	-15.4	1.724	-170.2	.0725	-159.1	.477	-21.0
39500	.290	-17.1	1.646	-164.4	.0724	-162.9	.482	-16.5
40000	.287	-19.2	1.557	-159.1	.0728	-168.1	.487	-11.9

NOTE:* The data includes bonding wires.

n: number of wires RF IN n=1 (0.3mm length, 25µm Dia Au wire)
RF OUT n=1 (0.3mm length, 25µm Dia Au wire)

FMM5702X

27-32GHz LNA MMIC

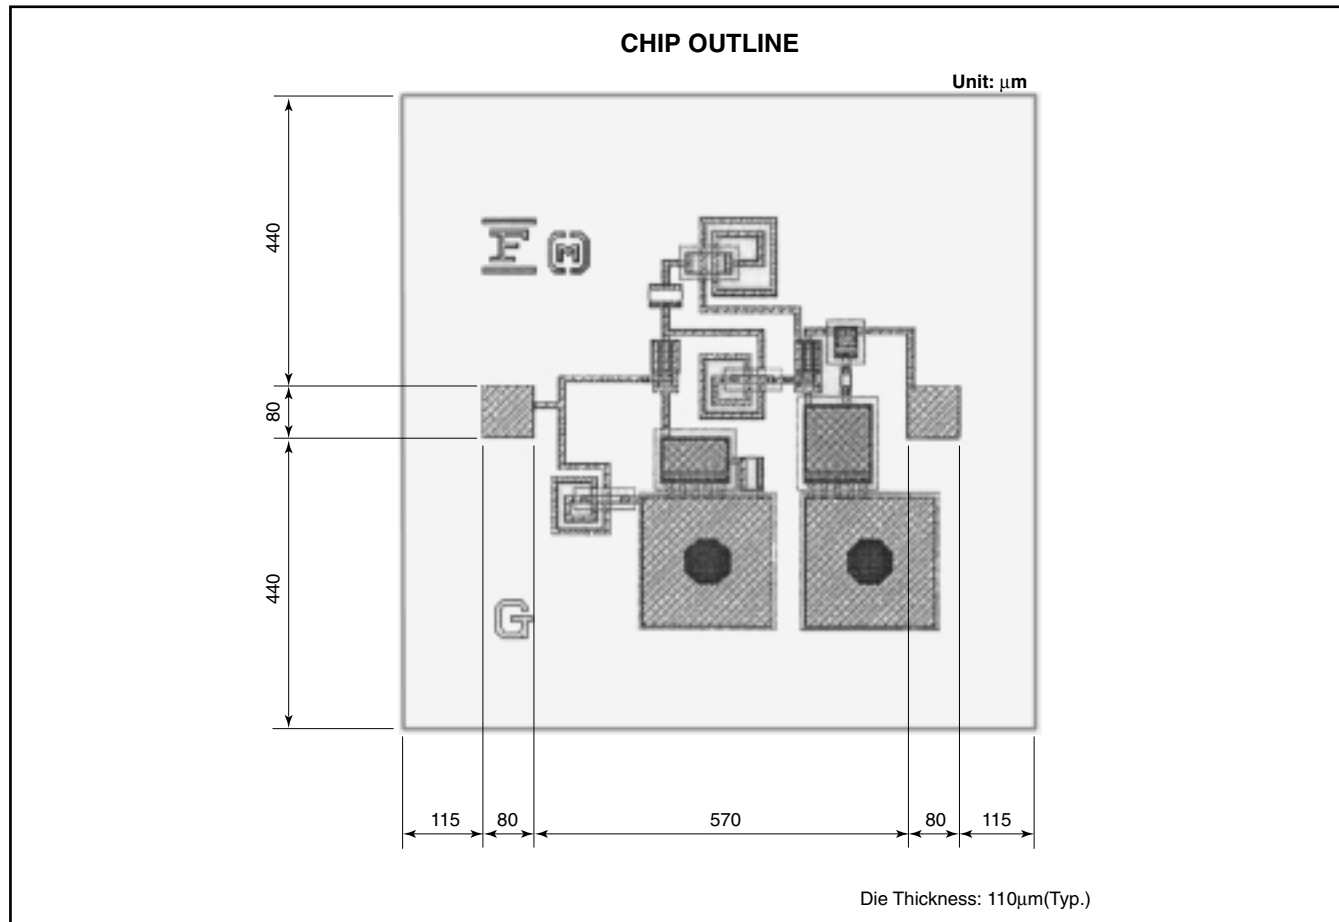

For further information please contact:
FUJITSU COMPOUND SEMICONDUCTOR, INC.
2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
Phone: (408) 232-9500
FAX: (408) 428-9111
www.fcsi.fujitsu.com

FUJITSU MICROELECTRONICS EUROPE, GmbH
Quantum Devices Division
Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
Phone: +44 (0)1628 504800
FAX: +44 (0)1628 504888

CAUTION

Fujitsu Compound Semiconductor Products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not ingest.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Fujitsu Limited reserves the right to change products and specifications without notice.
The information does not convey any license under rights of Fujitsu Limited or others.

© 1999 FUJITSU COMPOUND SEMICONDUCTOR, INC.
Printed in U.S.A. FCSI0599M200