


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032
FP12-200.DC2

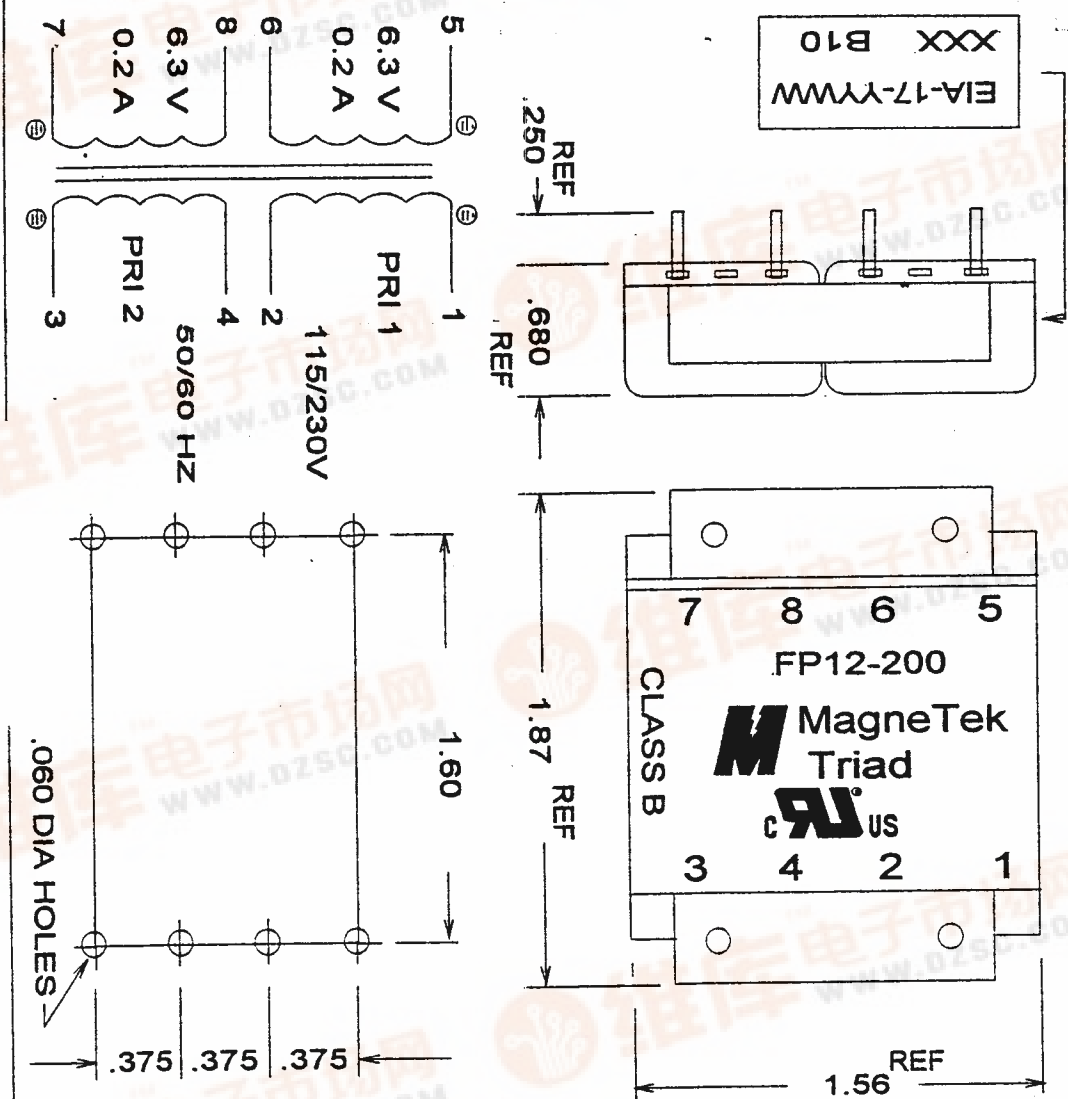

PRODUCTION TESTS

TURNS RATIO = 100%

DC 1-2 = 3-4 = 765 TO 930

RESISTANCE 5-6 = 7-8 = 4.15 TO 5.05

IN OHMS

MAX EXCITATION CURRENT = .010 A

APPLY = 230V 60HZ, 1-4 (TIE 2+3)

OPEN CIRCUIT VOLTAGE

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 8.1 TO 8.5 V

HIPOT = 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

RS

FINAL ASSEMBLY NOTES

MagneTek

PART NO. FP12-200