


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032  
FP16-150.DC2

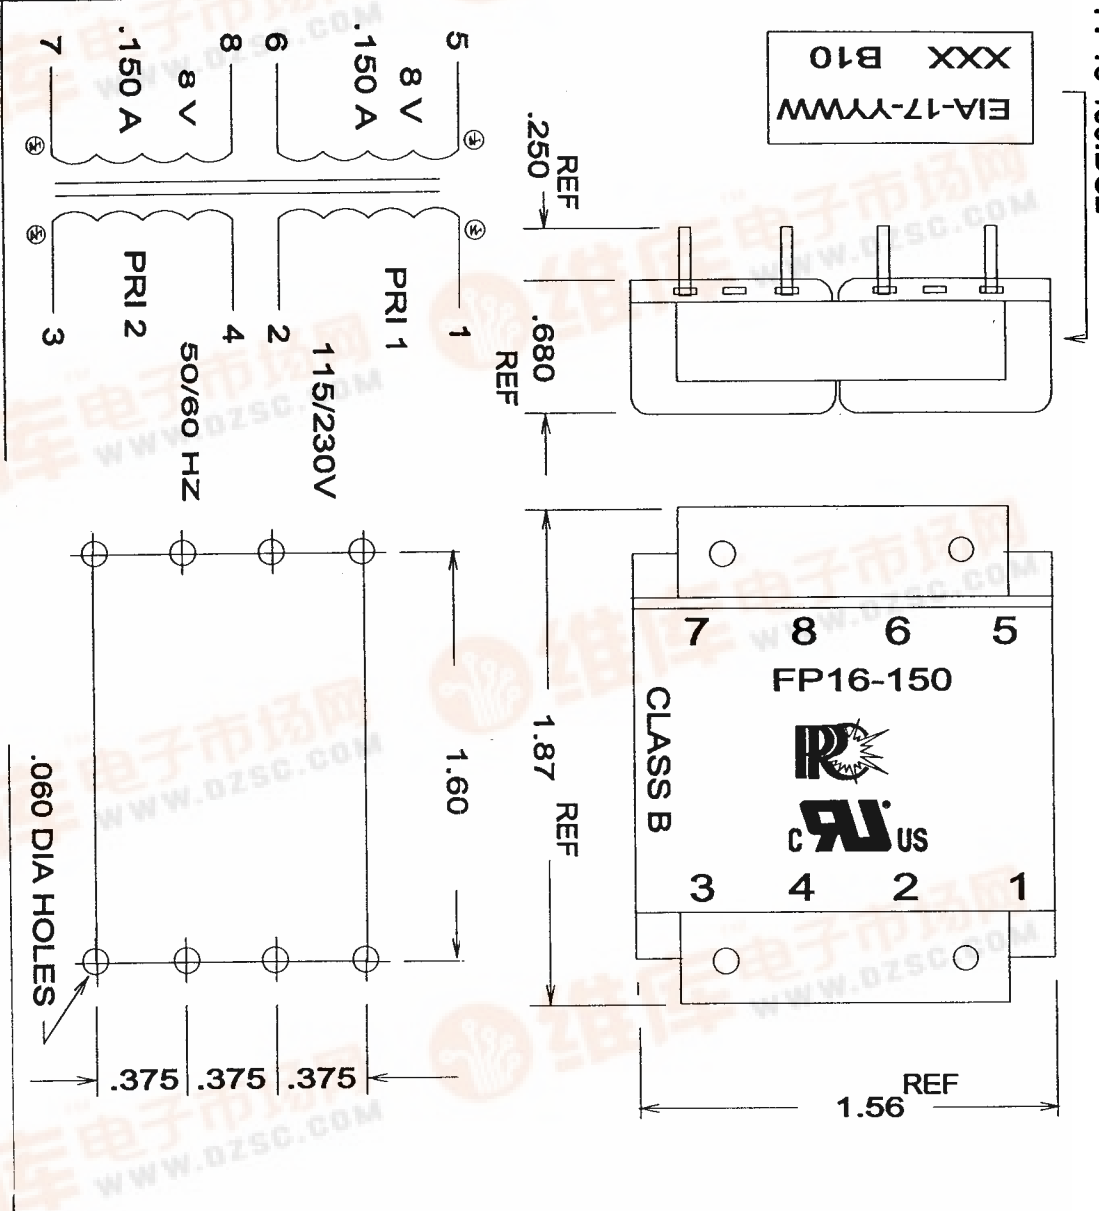

METHOD 1 X 1  
 MARKING PRINTED WRAPPER  
 ON DATE & SITE CODE ON DECAL

## PRODUCTION TESTS

TURN RATIO = 100%

DC 1-2 = 3-4 = 765 TO 930  
 RESISTANCE 5-6 = 7-8 = 6.6 TO 8.1  
 IN OHMS

MAX EXCITATION CURRENT = .010 A  
 APPLY = 230V 60HZ, 1-4 (TIE 2+3)  
 OPEN CIRCUIT VOLTAGE  
 EACH PRI = 114.5 TO 115.5 V  
 EACH SEC = 10.2 TO 10.7 V

HIPOT = 2000V PRI'S TO SEC'S  
 1500V PRI'S, SEC'S TO CORE  
 500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS  
 PINS TO FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES



PART NO.: FP16-150