

AMOSPEC

FRF1630 Thru FRF1660

Switchmode

Full Plastic Dual Fast Recovery Power Rectifiers

Designed for use in switching power supplies, inverters and as free wheeling diodes. These state-of-the-art devices have the following features:

- *Glass Passivated chip junctions
- *Low Reverse Leakage Current
- *Fast Switching for High Efficiency
- *150°C Operating Junction Temperature
- *Low Forward Voltage, High Current Capability
- *Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

Plating pb free is indicated by box

FAST RECOVERY RECTIFIERS


**16 AMPERES
30-600 VOLTS**



ITO-220AB

MAXIMUM RATINGS


Characteristic	Symbol	FRF16				Unit
		30	40	50	60	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	300	400	500	600	V
RMS Reverse Voltage	$V_{R(RMS)}$	210	280	350	420	V
Average Rectifier Forward Current Per Leg $T_C=125^\circ\text{C}$ Per Total Device	$I_{F(AV)}$	8.0 16				A
Peak Repetitive Forward Current (Rate V_R , Square Wave, 20kHz, $T_C=125^\circ\text{C}$)	I_{FM}	16				A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz)	I_{FSM}	150				A
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150				$^\circ\text{C}$



DIM	MILLIMETERS	
	MIN	MAX
A	15.05	15.15
B	13.35	13.45
C	10.00	10.10
D	6.55	6.65
E	2.65	2.75
F	1.55	1.65
G	1.15	1.25
H	0.55	0.65
I	2.50	2.60
J	3.00	3.20
K	1.10	1.20
L	0.55	0.65
M	4.40	4.60
N	1.15	1.25
P	2.65	2.75
O	3.35	3.45
Q	3.15	3.25

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	FRF16				Unit
		30	40	50	60	
Maximum Instantaneous Forward Voltage ($I_F=8.0$ Amp $T_C=25^\circ\text{C}$)	V_F	1.3				V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C=25^\circ\text{C}$) (Rated DC Voltage, $T_C=125^\circ\text{C}$)	I_R	10 200				μA
Reverse Recovery Time ($I_F=0.5$ A, $I_R=1.0$, $t_{rr}=0.25$ A)	T_{rr}	250				ns
Typical Junction Capacitance (Reverse Voltage of 4 volts & $f=1$ MHz)	C_P	90				pF



FRF1630 Thru FRF1660

FIG-1 TYPICAL FORWARD CHARACTERISITICS

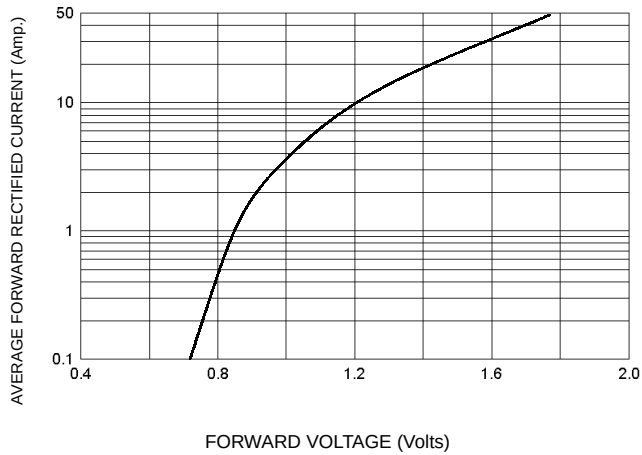


FIG-2 TYPICAL REVERSE CHARACTERISTICS

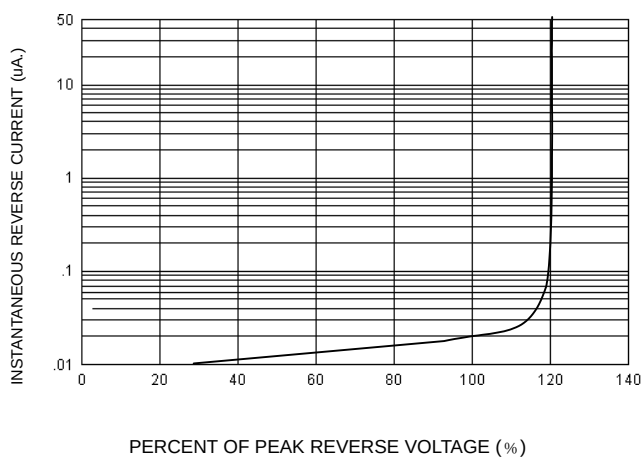


FIG-3 FORWARD CURRENT DERATING CURVE

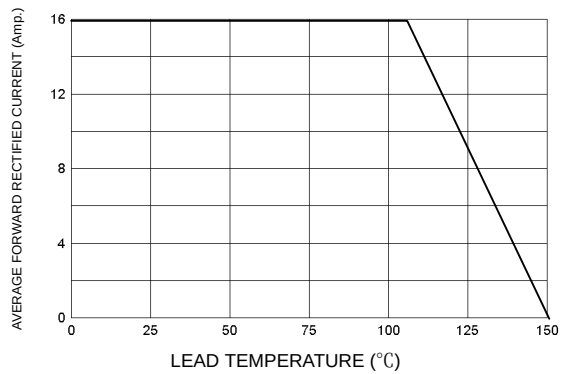


FIG-4TYPICAL JUNCTION CAPACITANCE




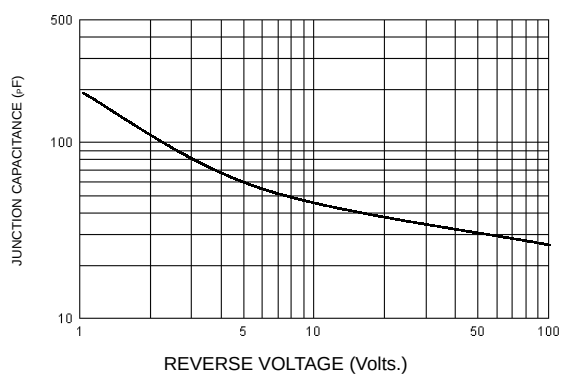


FIG-5PEAK FORWARD SURGE CURRENT

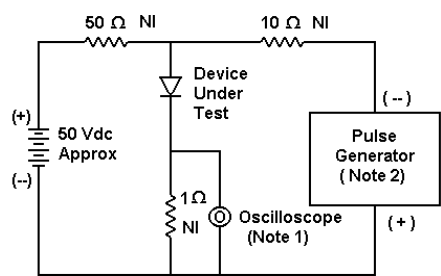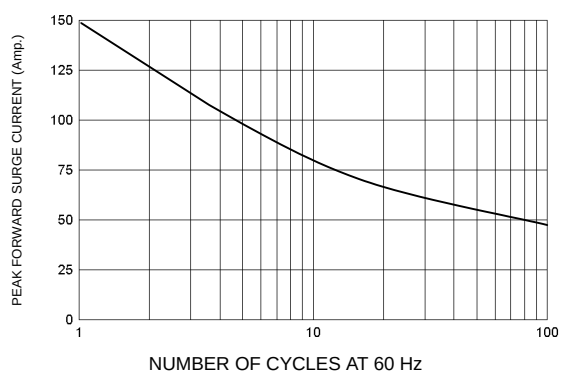

- Notes:
1. Rise Time = 7 ns max. Input Impedance = 1 M Ω , 22 pF
 2. Rise Time = 10 ns max. Input Impedance = 50 Ω

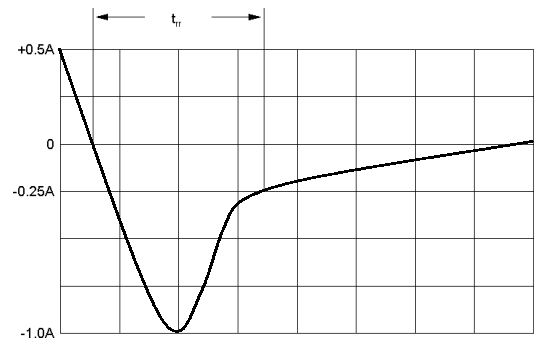

Set time base for 50/100 ns/cm

FIG-6 Reverse Recovery Time Characteristic and Test Circuit Diagram

