



查询FST73100M供应商

Transys
Electronics
LIMITED

捷多邦, 专业PCB打样工厂, 24小时加急出货

**FST7320M
THRU
FST73100M**

SCHOTTKY DIODES MODULE TYPE 70A

Features

High Surge Capability
Types Up to 100 V V_{RRM}

**70Amp Rectifier
20-100 Volts**



**MINI MOD
D61-3M**

Maximum Ratings

Operating Temperature: -40°C to $+175^{\circ}\text{C}$

Storage Temperature: -40°C to $+175^{\circ}\text{C}$

Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
FST7320M	20V	14V	20V
FST7330M	30V	21V	30V
FST7335M	35V	25V	35V
FST7340M	40V	28V	40V
FST7345M	45V	32V	45V
FST7360M	60V	42V	60V
FST7380M	80V	56V	80V
FST73100M	100V	70V	100V



Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current (Per pkg)	$I_{F(AV)}$	70A	$T_C = 100^{\circ}\text{C}$
Peak Forward Surge Current (Per leg)	I_{FSM}	800A	8.3ms, half sine
Maximum Instantaneous Forward Voltage NOTE (1)	V_F	0.55V 0.75V 0.84V	(FST7320M~FST7345M) (FST7360M) (FST7380M~FST73100M) $I_{FM} = 35\text{ A}; T_j = 25^{\circ}\text{C}$
Maximum Instantaneous Reverse Current At Rated DC Blocking Voltage (Per leg)	I_R	5.0 mA 500 mA	$T_j = 25^{\circ}\text{C}$ $T_j = 125^{\circ}\text{C}$
Maximum Thermal Resistance Junction To Case (Per leg)	$R_{\theta jc}$	1.2 $^{\circ}\text{C/W}$	

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	1.180	1.195	29.97	30.35	
B	.200	NOM	5.08	NOM	2PL
C	.027	.037	0.69	0.94	
D	.088	.098	2.24	2.49	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.457	.477	11.61	12.12	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	$\emptyset$
P	.015	.025	0.38	0.64	

NOTE :

(1) Pulse Test: Pulse Width 300 usec, Duty Cycle $< 2\%$



FST7320M THRU FST73100M

Figure .1-Typical Forward Characteristics


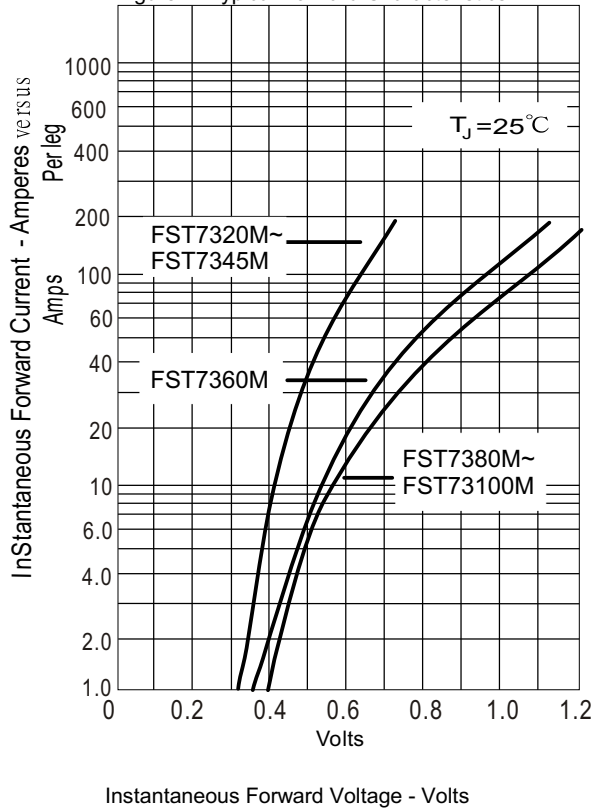


Figure .2 -Forward Derating Curve

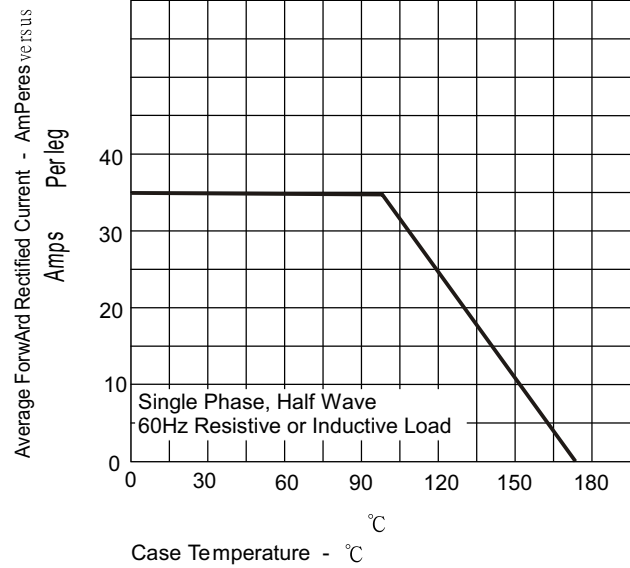

Instantaneous Forward Voltage - Volts

Figure .3-Peak Forward Surge Current

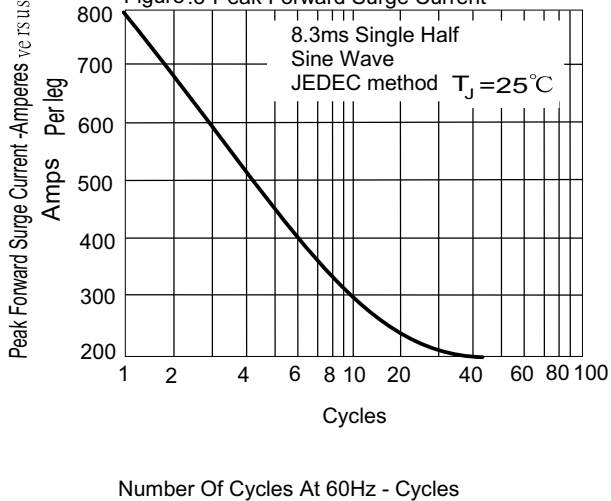


Figure .4-Typical Reverse Characteristics

