



March 2006

# FSUSB31

## Low Power Dual SPST Hi-Speed USB 2.0 (480Mbps) Switch

### Features

- Low On capacitance, 6.0pF (typical)
- Low On resistance, 6.5Ω (typical)
- Low power consumption (1μA maximum)
  - 10μA maximum ICCT over and expanded control voltage range ( $V_{IN}=2.6V$ ,  $V_{CC}=4.3V$ )
- Wide -3dB bandwidth, > 720MHz
- 8K I/O to GND ESD protection
- Power OFF protection when  $V_{CC}=0V$ , D+/D- pins can tolerate up to 4.3V
- Packaged in:
  - Pb-Free 8-lead MicroPak™ (1.6mm x 1.6mm)
  - Pb-Free 8-lead US-8 (preliminary)

### Applications

- Cell phone, PDA, Digital Camera, and Notebook
- LCD Monitor, TV, and Set-top Box

### General Description

The FSUSB30 is a Low Power, Dual SPST 2-Port Hi-Speed USB 2.0 switch. This part is configured as a single pole, single throw switch and is optimized for switching or isolating a Hi-Speed (480Mbps) source or a Hi-Speed and Full Speed (12Mbps) source. The FSUSB31 is compatible with the requirements of USB2.0 and features an extremely low On Capacitance ( $C_{ON}$ ) of 6.0pF. The wide bandwidth of this device (>720MHz), exceeds the bandwidth needed to pass the 3rd harmonic, resulting in signals with minimum edge and phase distortion. Superior channel-to-channel crosstalk also minimizes interference.


The FSUSB31 contains special circuitry on the D+/D- pins which allows the device to withstand an overvoltage condition. This device is also designed to minimize current consumption even when the control voltage applied to the OE pin, is lower than the supply voltage ( $V_{CC}$ ). This feature is especially valuable to Ultra-Portable applications such as cell phones, allowing for direct interface with the General Purpose I/Os of the baseband processor. Other applications include port isolation and switching in portable cell phones, PDAs, digital cameras, printers, and notebook computers.

### Ordering Information

Order Number	Package Number	Package Description
FSUSB31K8X (Preliminary)	MAB08A	Pb-Free 8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide
FSUSB31L8X	MAC08A	Pb-Free 8-Lead MicroPak, 1.6 mm Wide

Pb-Free package per JEDEC J-STD-020B.


### Application Diagram

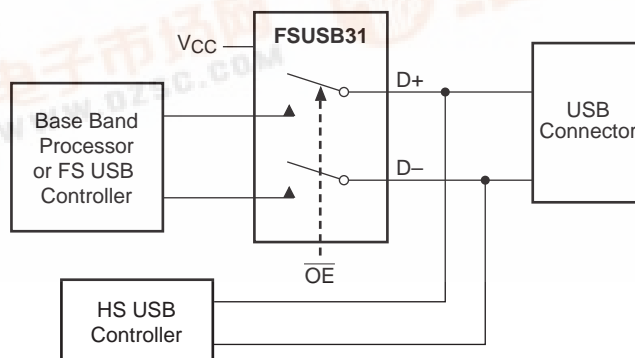

MicroPak™ is a trademark of Fairchild Semiconductor Corporation.


# Connection Diagrams

## Pad Assignments for MicroPak




(Top View)

## Pin Assignment for US8



(Top Through View)

# Analog Symbol



# Pin Descriptions

Pin Name	Description
$\overline{OE}$	Bus Switch Enable
D+, D-, HSD+, HSD-	Data Ports
NC	No Connect

# Truth Table

$\overline{OE}$	Function
H	Disconnect
L	D+, D- = HSD

## Absolute Maximum Ratings

The “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The “Recommended Operating Conditions” table will define the conditions for actual device operation.)

Symbol	Parameter	Rating
$V_{CC}$	Supply Voltage	–0.5V to +4.6V
$V_S$	DC Input Voltage <sup>(1)</sup>	–0.5V to +4.6V
$V_{IN}$	DC Switch Voltage <sup>(1)</sup>	
	HSD	–0.5V to $V_{CC} + 0.3V$
	D+, D–	–0.5V to +4.6V
	DC Input Diode Current	–50mA
	DC Output Current	50mA
	Storage Temperature	–65°C to +150°C
	ESD (Human Body Model)	
	All Pins	7.5kV
	I/O to GND	8kV

## Recommended Operating Conditions<sup>(2)</sup>

Symbol	Parameter	Rating
$V_{CC}$	Supply Voltage	3.0V to 4.3V
$V_{IN}$	Control Input Voltage	0V to $V_{CC}$
	Switch Input Voltage	0V to $V_{CC}$
	Operating Temperature	–40°C to +85°C

### Notes:

1. The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed. DC switch voltage may never exceed 4.6V.
2. Control input must be held HIGH or LOW and it must not float.

## DC Electrical Characteristics

(All typical values are @ 25°C unless otherwise specified.)

Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	T <sub>A</sub> = -40°C to +85°C			Units
				Min	Typ	Max	
V <sub>IK</sub>	Clamp Diode Voltage	I <sub>IN</sub> = -18mA	3.0			-1.2	V
V <sub>IH</sub>	Input Voltage HIGH		3.0 to 3.6	1.3			V
			4.3	1.7			
V <sub>IL</sub>	Input Voltage LOW		3.0 to 3.6			0.5	V
			4.3			0.7	
I <sub>IN</sub>	Control Input Leakage	V <sub>IN</sub> = 0V to V <sub>CC</sub>	4.3	-1.0		1.0	μA
I <sub>OZ</sub>	OFF State Leakage	0 ≤ HSD ≤ V <sub>CC</sub>	4.3	-2.0		2.0	μA
I <sub>OFF</sub>	Power OFF Leakage Current (D+, D-)	V <sub>IN</sub> = 0.0V to 4.3V, V <sub>CC</sub> = 0V	0	-2.0		2.0	μA
R <sub>ON</sub>	Switch On Resistance <sup>3</sup>	V <sub>IN</sub> = 0.4V, I <sub>ON</sub> = -8mA	3.0		6.5	10.0	Ω
ΔR <sub>ON</sub>	Delta R <sub>ON</sub> <sup>4</sup>	V <sub>IN</sub> = 0.4V, I <sub>ON</sub> = -8mA	3.0		0.35		Ω
R <sub>ON</sub> Flatness	R <sub>ON</sub> Flatness <sup>3</sup>	V <sub>IN</sub> = 0.0V – 1.0V, I <sub>ON</sub> = -8mA	3.0		2.0		Ω
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> = 0.0V or V <sub>CC</sub> , I <sub>OUT</sub> = 0	4.3			1.0	μA
I <sub>CC</sub> T	Increase in I <sub>CC</sub> Current per Control Voltage and V <sub>CC</sub> Levels	V <sub>IN</sub> = 2.6V, V <sub>CC</sub> = 4.3V	4.3			10.0	μA

## AC Electrical Characteristics

(All typical values are for V<sub>CC</sub> = 3.3V @ 25°C unless otherwise specified.)

Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	T <sub>A</sub> = -40°C to +85°C			Units	Figure Number
				Min	Typ	Max		
t <sub>ON</sub>	Turn On Time, OE to Output	V <sub>IN</sub> = 0.8V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF	3.0 to 3.6		15.0	30.0	ns	Figure 8
t <sub>OFF</sub>	Turn OFF Time, OE to Output	V <sub>IN</sub> = 0.8V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF	3.0 to 3.6		12.0	25.0	ns	Figure 8
t <sub>PD</sub>	Propagation Delay <sup>4</sup>	R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF	3.3		0.25		ns	Figure 6 Figure 7
T <sub>BMM</sub>	Break-Before-Make	R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF, V <sub>IN</sub> = 0.8V	3.0 to 3.6	2.0		6.5	ns	Figure 9
O <sub>IRR</sub>	OFF Isolation (Non-Adjacent)	R <sub>T</sub> = 50Ω, f = 240MHz	3.0 to 3.6		-35.0		dB	Figure 12
Xtalk	Non-Adjacent Channel Crosstalk	R <sub>T</sub> = 50Ω, f = 240MHz	3.0 to 3.6		-55.0		dB	Figure 13
BW	-3dB Bandwidth	R <sub>T</sub> = 50Ω, C <sub>L</sub> = 0pF	3.0 to 3.6		720		MHz	Figure 11
		R <sub>T</sub> = 50Ω, C <sub>L</sub> = 5pF			550			

### Notes:

- Measured by the voltage drop between Dn, HSD, Dn pins at the indicated current through the switch. On Resistance is determined by the lower of the voltage on the two ports.
- Guaranteed by characterization.

### USB Hi-Speed Related AC Electrical Characteristics

Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	T <sub>A</sub> = -40°C to +85°C			Units	Figure Number
				Min	Typ	Max		
t <sub>SK(O)</sub>	Channel-to-Channel Skew <sup>5</sup>	C <sub>L</sub> = 5pF	3.0 to 3.6		50.0		ps	Figure 6 Figure 10
t <sub>SK(P)</sub>	Skew of Opposite Transitions of the Same Output <sup>5</sup>	C <sub>L</sub> = 5pF	3.0 to 3.6		20.0		ps	Figure 6 Figure 10
t <sub>J</sub>	Total Jitter <sup>5</sup>	R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF, t <sub>R</sub> = t <sub>F</sub> = 500ps at 480 Mbps (PRBS = 2 <sup>15</sup> - 1)	3.0 to 3.6		200		ps	

#### Notes:

5. Guaranteed by design.

### Capacitance

Symbol	Parameter	Conditions	T <sub>A</sub> = -40°C to +85°C			Units	Figure Number
			Min	Typ	Max		
C <sub>IN</sub>	Control Pin Input Capacitance	V <sub>CC</sub> = 0V		1.0		pF	Figure 15
C <sub>ON</sub>	D1 <sub>n</sub> , D2 <sub>n</sub> , Dn ON Capacitance	V <sub>CC</sub> = 3.3, $\overline{OE}$ = 0V		6.0		pF	Figure 14
C <sub>OFF</sub>	D1 <sub>n</sub> , D2 <sub>n</sub> OFF Capacitance	V <sub>CC</sub> and $\overline{OE}$ = 3.3		1.7		pF	Figure 15

## Typical Characteristics

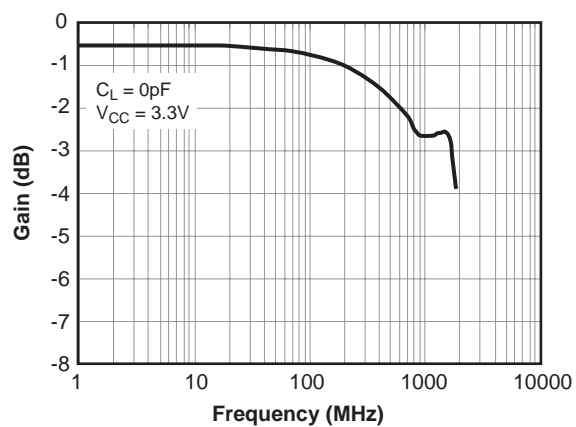


Figure 1. Gain vs. Frequency

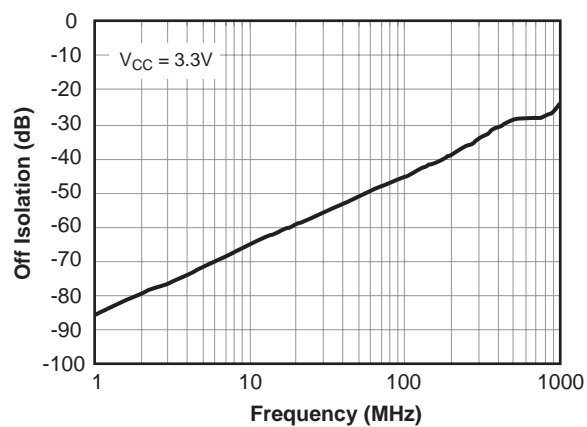


Figure 2. OFF Isolation

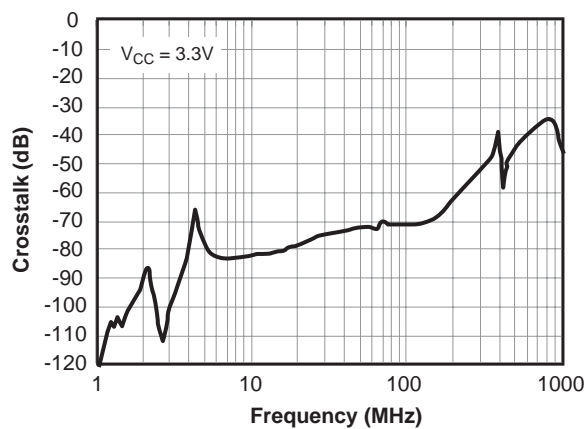


Figure 3. Crosstalk

## Test Diagrams



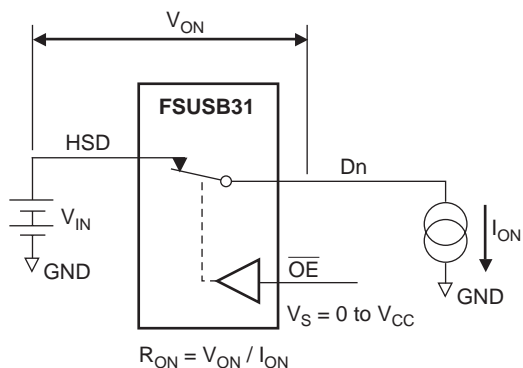


Figure 4. On Resistance

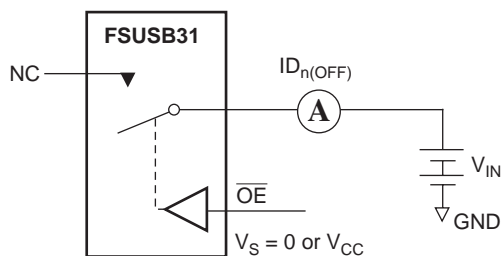

Each switch port is tested separately.

Figure 5. OFF Leakage

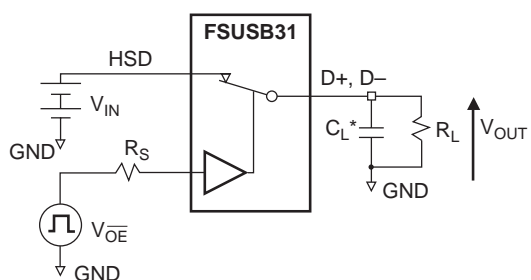

$R_L$ ,  $R_S$ , and  $C_L$  are functions of the application environment (see AC Electrical tables for specific values).

\* $C_L$  includes test fixture and stray capacitance.

Figure 6. AC Test Circuit Load

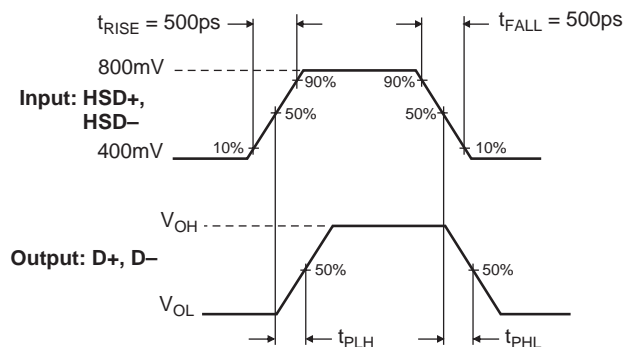


Figure 7. Switch Propagation Delay Waveforms ( $T_{PD}$ )

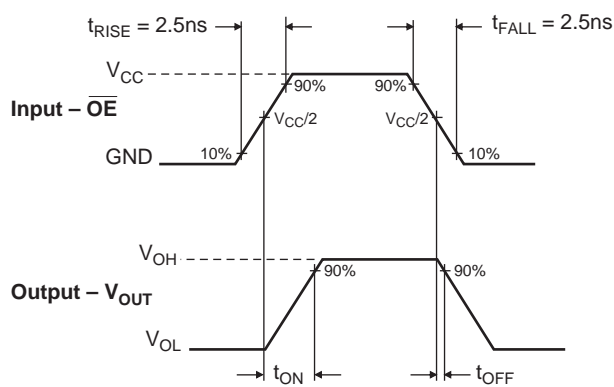


Figure 8. Turn ON / Turn OFF Waveform ( $T_{ON} / T_{OFF}$ )

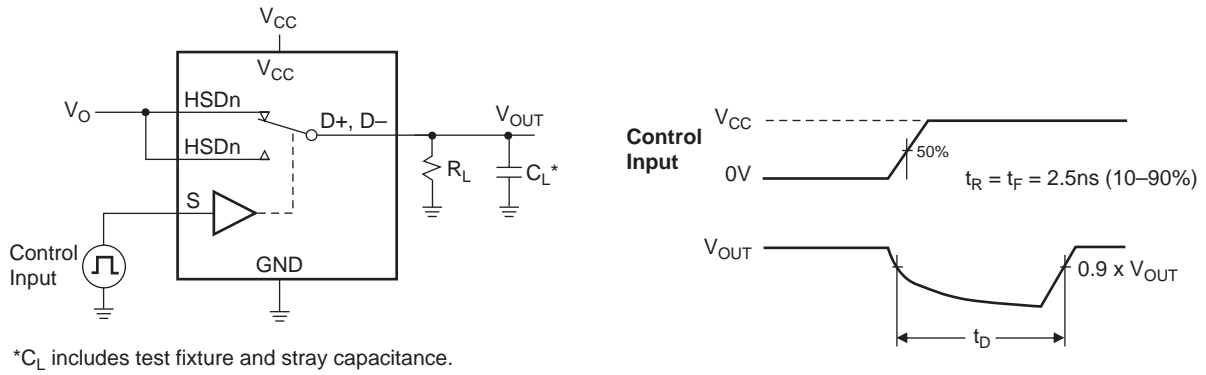


Figure 9. Break-before-Make ( $T_{BBM}$ )

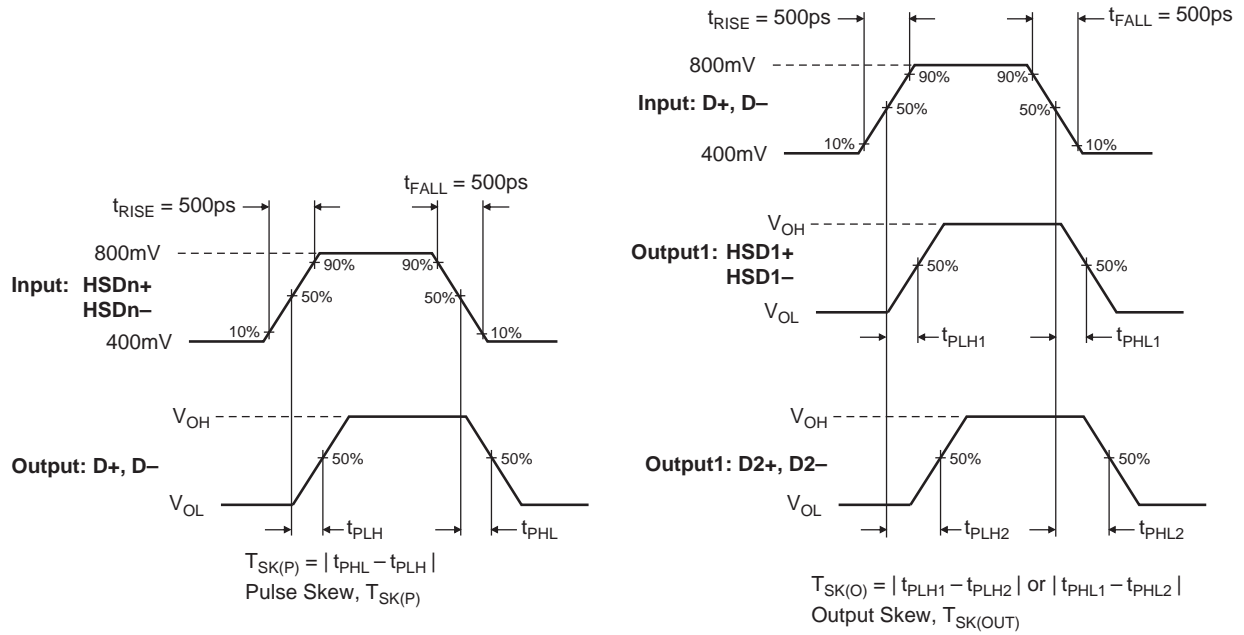


Figure 10. Switch Skew Tests

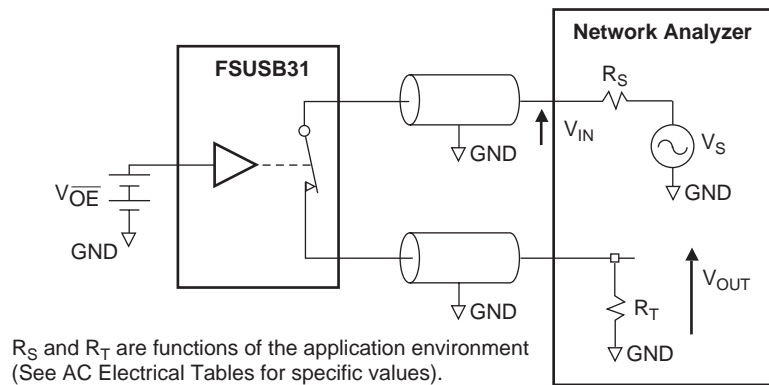


Figure 11. Bandwidth



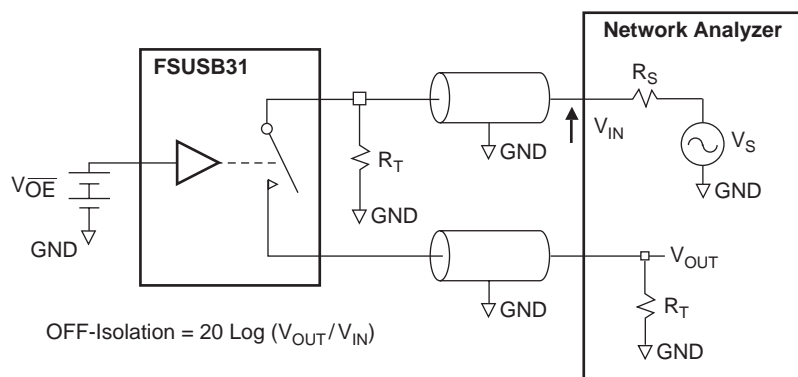


Figure 12. Channel OFF Isolation

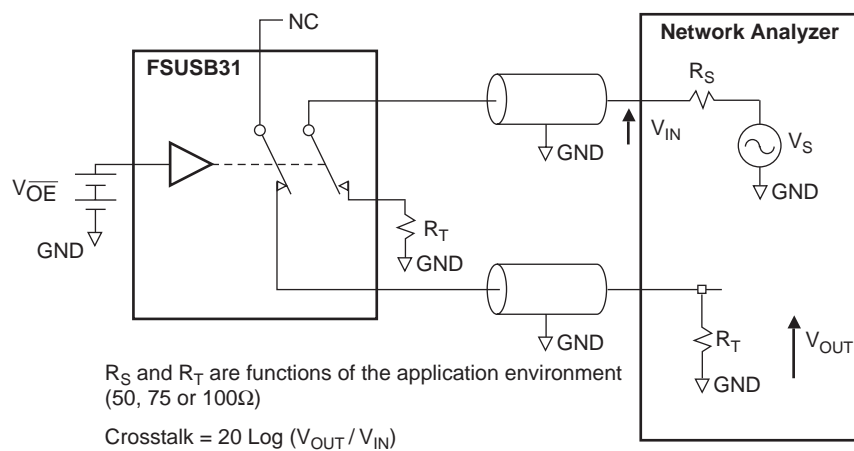


Figure 13. Non-Adjacent Channel-to-Channel Crosstalk

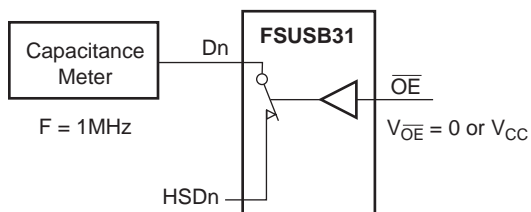


Figure 14. Channel ON Capacitance

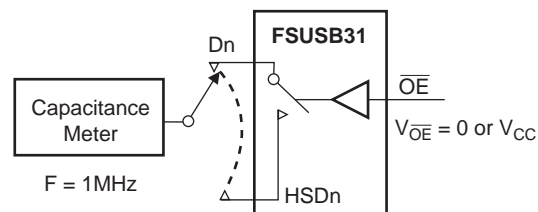



Figure 15. Channel OFF Capacitance

## Tape and Reel Specification


### Tape Format for MircoPak

Package Designator	Tape Section	Number Cavities	Cavity Status	Cover Tape Status
L8X	Leader (Start End)	125 (typ)	Empty	Sealed
	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed

### Tape Dimension inches (millimeters)

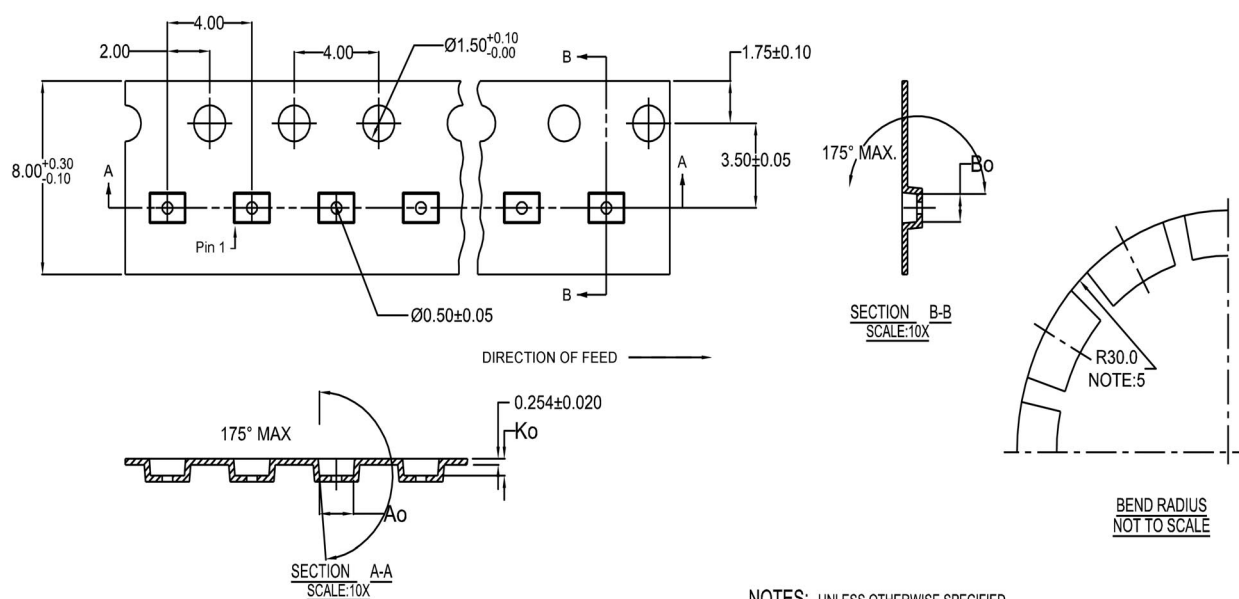

10	300056	2.30±0.05	1.78±0.05	0.68±0.05
8	300038	1.78±0.05	1.78±0.05	0.68±0.05
6	300033	1.60±0.05	1.15±0.05	0.70±0.05




SCALE: 6X

#### NOTES: UNLESS OTHERWISE SPECIFIED


1. ACCUMULATED 50 SPROCKETS, SPROCKET HOLE PITCH IS 200.00 ±0.30MM
2. NO INDICATED CORNER RADIUS IS 0.127MM
3. CAMBER NOT TO EXCEED 1MM IN 100MM
4. SMALLEST ALLOWABLE BENDING RADIUS
5. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

Reel Dimension for MircoPak inches (millimeters)

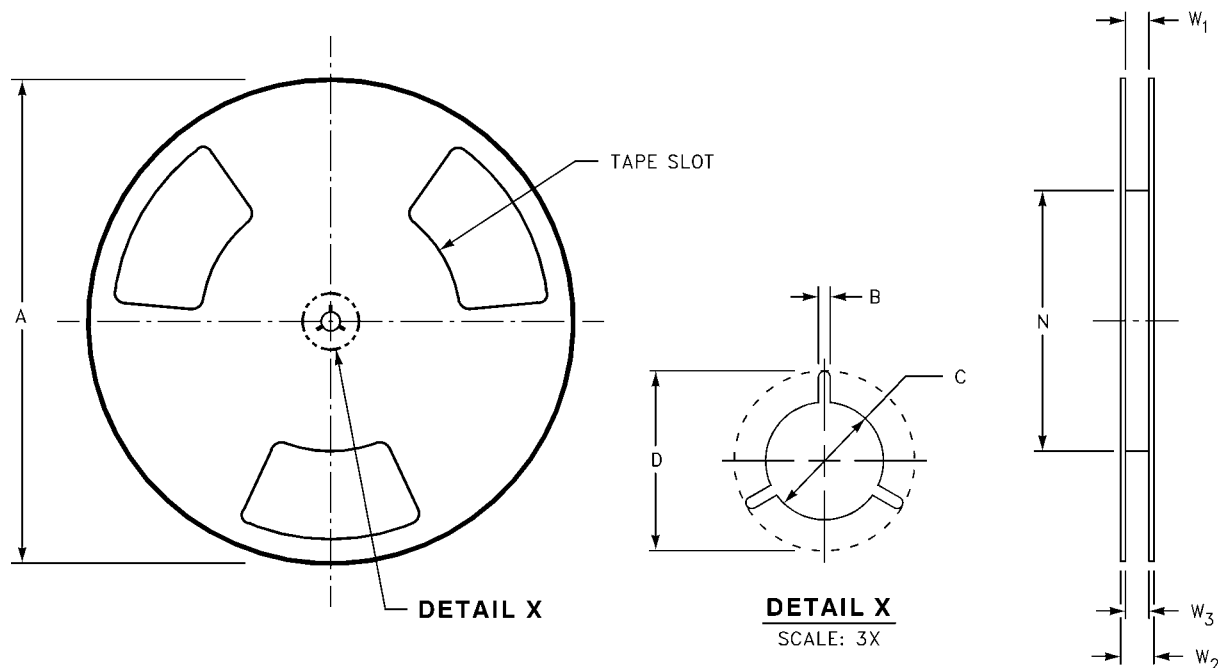

Tape Size	A	B	C	D	N	W1	W2	W3
8 mm	7.0 (177.8)	0.059 (1.50)	0.512 (13.00)	0.795 (20.20)	2.165 (55.00)	0.331 + 0.059/-0.000 (8.40 + 1.50/-0.00)	0.567 (14.40)	W1 + 0.078/-0.039 (W1 + 2.00/-1.00)



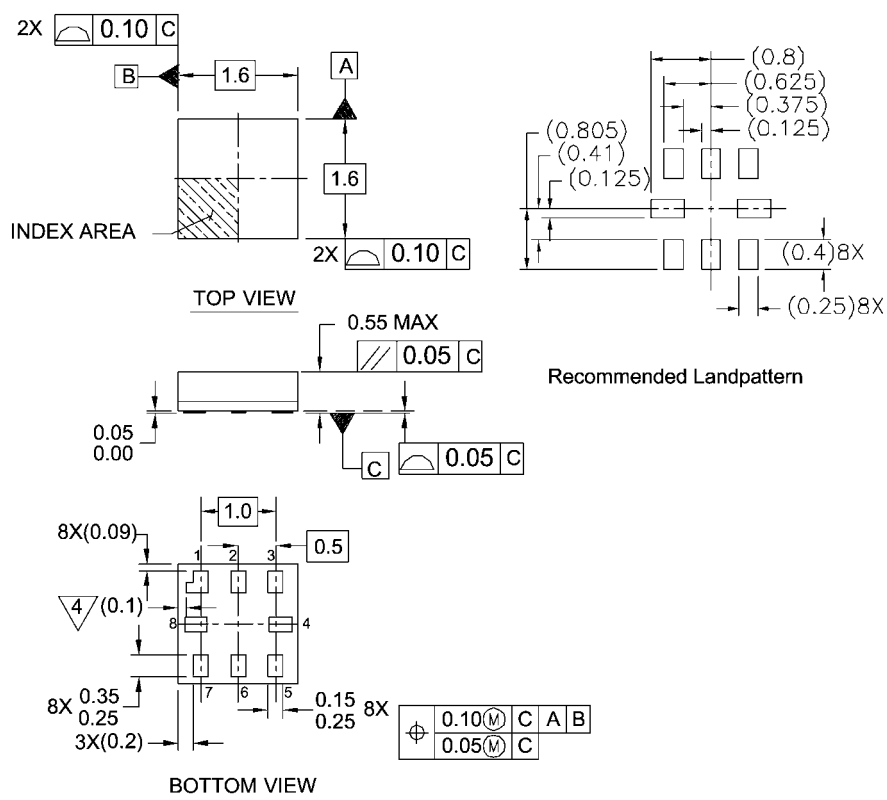

Notes:

1. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y.14M-1994
4. PIN 1 FLAG, END OF PACKAGE OFFSET.

MAC08AREVC

**Pb-Free 8-Lead MicroPak, 1.6 mm Wide  
Package Number MAC08A**

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE <sup>™</sup>	FAST <sup>®</sup>	ISOPLANAR <sup>™</sup>	PowerSaver <sup>™</sup>	SuperSOT <sup>™</sup> -6
ActiveArray <sup>™</sup>	FAST <sup>™</sup>	LittleFET <sup>™</sup>	PowerTrench <sup>®</sup>	SuperSOT <sup>™</sup> -8
Bottomless <sup>™</sup>	FPS <sup>™</sup>	MICROCOUPLER <sup>™</sup>	QFET <sup>®</sup>	SyncFET <sup>™</sup>
Build it Now <sup>™</sup>	FRFET <sup>™</sup>	MicroFET <sup>™</sup>	QS <sup>™</sup>	TCM <sup>™</sup>
CoolFET <sup>™</sup>	GlobalOptoisolator <sup>™</sup>	MicroPak <sup>™</sup>	QT Optoelectronics <sup>™</sup>	TinyLogic <sup>®</sup>
CROSSVOLT <sup>™</sup>	GTO <sup>™</sup>	MICROWIRE <sup>™</sup>	Quiet Series <sup>™</sup>	TINYOPTO <sup>™</sup>
DOMET <sup>™</sup>	HiSeC <sup>™</sup>	MSX <sup>™</sup>	RapidConfigure <sup>™</sup>	TruTranslation <sup>™</sup>
EcoSPARK <sup>™</sup>	I <sup>2</sup> C <sup>™</sup>	MSXPro <sup>™</sup>	RapidConnect <sup>™</sup>	UHC <sup>™</sup>
E <sup>2</sup> CMOS <sup>™</sup>	i-Lo <sup>™</sup>	OCX <sup>™</sup>	μSerDes <sup>™</sup>	UltraFET <sup>®</sup>
EnSigna <sup>™</sup>	ImpliedDisconnect <sup>™</sup>	OCXPro <sup>™</sup>	ScalarPump <sup>™</sup>	UniFET <sup>™</sup>
FACT <sup>™</sup>	IntelliMAX <sup>™</sup>	OPTOLOGIC <sup>®</sup>	SILENT SWITCHER <sup>®</sup>	VCX <sup>™</sup>
FACT Quiet Series <sup>™</sup>		OPTOPLANAR <sup>™</sup>	SMART START <sup>™</sup>	Wire <sup>™</sup>
		PACMAN <sup>™</sup>	SPM <sup>™</sup>	
Across the board. Around the world. <sup>™</sup>		POP <sup>™</sup>	Stealth <sup>™</sup>	
The Power Franchise <sup>®</sup>		Power247 <sup>™</sup>	SuperFET <sup>™</sup>	
Programmable Active Droop <sup>™</sup>		PowerEdge <sup>™</sup>	SuperSOT <sup>™</sup> -3	

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.