



# HCMOS 5x3.2mm 2.5V SMD Oscillator

Model: F547 / F549 SERIES

RoHS Compliant / Pb Free

Rev. 7/2/2008

Page 1 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)

Need a Sample®

## FEATURES

- 2.5V Operation
- HCMOS Output
- Low Power Consumption
- Tape and Reel (1,000 pcs. STD)

PART NUMBER SELECTION <a href="#">Learn More</a> - Internet Required				
Part Number	Model Number	Frequency Stability <sup>1</sup>	Operating Temperature (°C)	Frequency Range (MHz)
809A-Frequency-xxxxx	F547	±15PPM	-20 ~ +70	4.000 - 54.000
809C-Frequency-xxxxx	F547R	±15PPM	-40 ~ +85	4.000 - 54.000
810A-Frequency-xxxxx	F549	±10PPM	-20 ~ +70	4.000 - 54.000
810C-Frequency-xxxxx	F549R	±10PPM	-40 ~ +85	4.000 - 54.000
813A-Frequency-xxxxx	F54S	±8PPM	20 ~ +70	4.000 - 54.000
813C-Frequency-xxxxx	F54SR	±8PPM	-40 ~ +85	4.000 - 54.000

ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	4.000 ~ 54.000 MHz
Storage Temperature Range (TSTG)	-40°C ~ +85°C
Supply Voltage (VDD)	2.5V ± 5%
Input Current (IDD)	7mA
Output Symmetry (50% VDD)	45% ~ 55%
Rise Time (10% ~ 90% VDD) (Tr)	5nS
Fall Time (90% ~ 10% VDD) (Tf)	5nS
Output Voltage (VOL)	10% VDD
(VOH)	90% VDD Min
Output Current (IOL)	4mA Min
(IOH)	-4mA Min
Output Load (HCMOS)	15pF
Standby Current	10µA
Start-up Time (Ts)	10mS
Output Disable Time <sup>2</sup>	100nS
Output Enable Time <sup>2</sup>	10mS
Phase Noise	-140Bc/Hz Typ. @ 10kHz offset
Period Jitter	3pS RMS Typ.
Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au

<sup>1</sup> Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging.


<sup>2</sup> An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Notes:

\*A 0.01µF capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply line noise.

\*Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

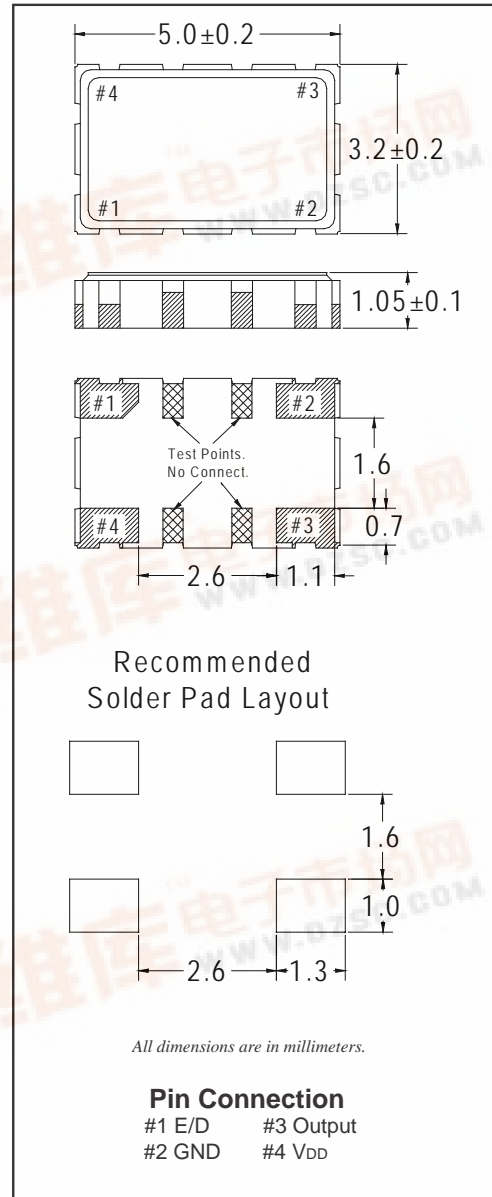

ENABLE / DISABLE FUNCTION	
Pin 1	OUTPUT (Pin 3)
OPEN	ACTIVE
'1' Level VIH ≥ 70% VDD	ACTIVE
'0' Level VIL ≤ 30% VDD	High Z



# HCMOS 5x3.2mm 2.5V SMD Oscillator




Model: F547 / F549 SERIES RoHS Compliant / Pb Free

Rev. 7/2/2008

Page 2 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)

Need a Sample®

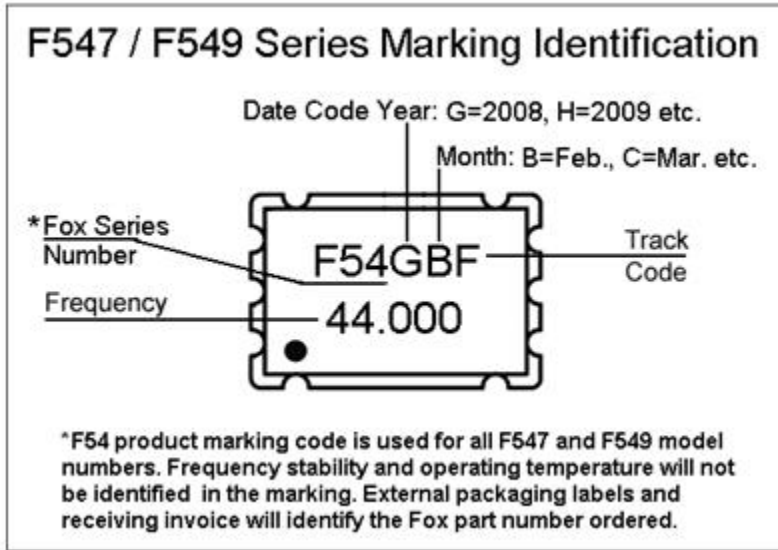

• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
F537/549 Series	∅1.5	4.0	8.0	5.5	12.0	1.5	1,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
F547/549 Series	2.0	∅13	∅20.2	∅62	∅180	13.5	1.6

