

# SOLID TANTALUM ELECTROLYTIC CAPACITORS

直銷F95C101M1A1A02快貨商

捷多邦, 專業PCB打樣工廠, 24小時加急出貨




# F95

Conformal coated  
Chip


FRAMELESS™




- Adapted to the RoHS directive (2002/95/EC).

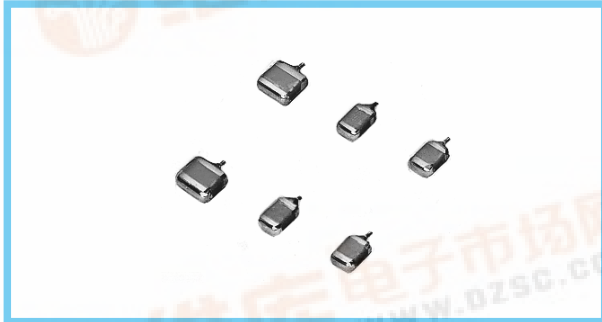

## Type numbering system (Example : 35V 1.5 μF)

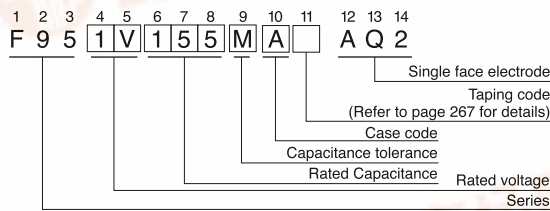

## Drawing

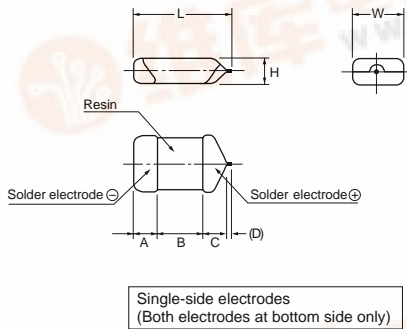

## Dimensions

case code	L	W	H	A	B	C	(D)
P	2.2 ± 0.3	1.25 ± 0.3	1.0 ± 0.2	0.6 ± 0.3	0.8 ± 0.3	0.8 ± 0.3	(0.2)
Q	3.2 ± 0.2	1.6 ± 0.2	0.8 ± 0.2	0.8 ± 0.2	1.2 ± 0.2	0.8 ± 0.2	(0.2)
S	3.2 ± 0.3	1.6 ± 0.3	1.0 ± 0.2	0.8 ± 0.3	1.2 ± 0.3	0.8 ± 0.3	(0.2)
A	3.2 ± 0.3	1.7 ± 0.3	1.4 ± 0.2	0.8 ± 0.3	1.2 ± 0.3	0.8 ± 0.3	(0.2)
T	3.5 ± 0.2	2.7 ± 0.2	1.0 ± 0.2	0.8 ± 0.2	1.2 ± 0.2	1.1 ± 0.2	(0.2)
B	3.3 ± 0.3	2.7 ± 0.3	1.8 ± 0.2	0.8 ± 0.3	1.2 ± 0.3	1.1 ± 0.3	(0.2)

D dimension only for reference

## Standard ratings

Cap. (μF)	V	Voltage Ratings						
		4	6.3	10	16	20	25	35
	Code	OG	OJ	1A	1C	1D	1E	1V
1	105				P		P · S	P · S · A
1.5	155				P		S	A
2.2	225				P		(P) · S · A	A
3.3	335			P	P	A	A	(A) · B
4.7	475			P	P	S · A	(Q) · S · A	(T) · B
6.8	685			P		Q · A	(Q)	
10	106		P	P	P · Q · S · A	A · B	(A) · B	
15	156	P	P	P	S · A			
22	226	P	P	P · Q · S · A	Q · S · A · T · B	B		
33	336	P	P · Q · S · A	Q · S · A	(A) · (T) · B			
47	476	P · Q · S · A	P · Q · S · A	(P) · (Q) · S · A · T · B	B			
68	686	S · A	S · A	B				
100	107	P · Q · S · A	(P) · (Q) · S · A · T · B	(T) · B				
150	157	(P) · B	B					
220	227	S · A · T · B	(T) · B					
330	337	(S) · (A) · T · B	(B)					

## Specifications

Item	Performance Characteristics
Category	−55 ~ +125°C (Rated temperature : 85°C)
Temperature Range	−55 ~ +125°C (Rated temperature : 85°C)
Capacitance Tolerance	±20%, ±10% (at 120Hz) (However P.Q.T Case ±20%)
Dissipation Factor (at 120Hz)	Refer to P.235
ESR(100kHz)	Refer to P.235
Leakage Current	<ul style="list-style-type: none"> <li>After 1 minute's application of rated voltage, leakage current at 20°C is not more than 0.01CV or 0.5 μA, whichever is greater.</li> <li>After 1 minute's application of rated voltage, leakage current at 85°C is not more than 0.1CV or 5 μA, whichever is greater.</li> <li>After 1 minute's application of derated voltage, leakage current at 125°C is not more than 0.125CV or 6.3 μA, whichever is greater.</li> </ul>
Capacitance Change by Temperature	+15% Max. (at +125°C) +10% Max. (at +85°C) −10% Max. (at −55°C)
Damp Heat	At 40°C, 90 ~ 95% R.H., For 500 hours (No voltage applied) Capacitance Change ..... Refer to next page (* 1) Dissipation Factor ..... Initial specified value or less Leakage Current ..... Initial specified value or less
Temperature Cycles	At −55°C / +125°C, 30 minutes each, For 5 cycles, Capacitance Change ..... Refer to next page (* 1) Dissipation Factor ..... Initial specified value or less Leakage Current ..... Initial specified value or less
Resistance to Soldering Heat	Dipping Flow at 260°C for 10 seconds, reflow at 260°C for 10 seconds Capacitance Change ..... Refer to next page (* 1) Dissipation Factor ..... Initial specified value or less Leakage Current ..... Initial specified value or less
Surge*	After application of surge voltage in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors meet the characteristics requirements listed below. Capacitance Change ..... Refer to next page (* 1) Dissipation Factor ..... Initial specified value or less Leakage Current ..... Initial specified value or less
Endurance*	After 2000 hours' application of rated voltage at 85°C, or derated voltage at 125°C, capacitors meet the characteristic requirements listed below. Capacitance Change ..... Refer to next page (* 1) Dissipation Factor ..... Initial specified value or less Leakage Current ..... Initial specified value or less
Shear Test	After applying the pressure load of 5N for 10 ± 1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on an aluminum substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.
Terminal Strength	Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of the capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.

\* As for the surge and derated voltage at 125°C, refer to page 266 for details.



( ) The series in parentheses are being developed.  
 Please contact to your local Nichicon sales office when these series are being designed in your application.

# SOLID TANTALUM ELECTROLYTIC CAPACITORS



## F95

### Standard ratings

Rated Volt	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	ESR (Ω@100kHz)	*1 ΔC/C (%)	
4V	15	P	F950G156MPAAQ2	0.6	10	1.8	*	
	22	P	F950G226MPAAQ2	0.9	14	1.1	*	
	33	P	F950G336MPAAQ2	1.3	14	1.1	*	
	47	P	F950G476MPAAQ2	1.9	14	1.1	*	
	47	Q	F950G476MQAAQ2	1.9	10	1.1	*	
	47	S	F950G476MSAAQ2	1.9	10	0.8	*	
	47	A	F950G476MAAAQ2	1.9	8	0.6	*	
	68	S	F950G686MSAAQ2	2.7	10	0.8	*	
	68	A	F950G686MAAAQ2	2.7	10	0.5	*	
	100	P	F950G107MPAAQ2	4.0	30	1.2	±15	
	100	Q	F950G107MQAAQ2	4.0	25	1.0	±15	
	100	S	F950G107MSAAQ2	4.0	14	0.8	*	
	100	A	F950G107MAAAQ2	4.0	12	0.5	*	
	150	B	F950G157MBAAQ2	6.0	14	0.4	*	
	220	S	F950G227MSAAQ2	8.8	25	0.8	±15	
	220	A	F950G227MAAAQ2	8.8	25	0.8	±15	
	220	T	F950G227MTAAQ2	8.8	25	0.6	*	
	220	B	F950G227MBAAQ2	8.8	16	0.4	*	
	330	T	F950G337MTAAQ2	13.2	40	0.8	±20	
	330	B	F950G337MBAAQ2	13.2	30	0.6	±15	
6.3V	10	P	F950J106MPAAQ2	0.6	8	2.0	*	
	15	P	F950J156MPAAQ2	0.9	10	1.8	*	
	22	P	F950J226MPAAQ2	1.4	14	1.1	*	
	33	P	F950J336MPAAQ2	2.1	14	1.1	*	
	33	Q	F950J336MQAAQ2	2.1	10	2.0	*	
	33	S	F950J336MSAAQ2	2.1	10	1.0	*	
	33	A	F950J336MAAAQ2	2.1	8	0.8	*	
	47	P	F950J476MPAAQ2	3.0	20	1.1	±15	
	47	Q	F950J476MQAAQ2	3.0	10	1.1	*	
	47	S	F950J476MSAAQ2	3.0	10	0.9	*	
	47	A	F950J476MAAAQ2	3.0	10	0.6	*	
	68	S	F950J686MSAAQ2	4.3	14	0.9	*	
	68	A	F950J686MAAAQ2	4.3	12	0.5	*	
	100	S	F950J107MSAAQ2	6.3	20	0.9	±15	
	100	A	F950J107MAAAQ2	6.3	14	0.5	*	
	100	T	F950J107MTAAQ2	6.3	14	0.6	*	
	100	B	F950J107MBAAQ2	6.3	14	0.4	*	
	150	B	F950J157MBAAQ2	9.5	18	0.4	*	
	220	B	F950J227MBAAQ2	13.9	30	0.4	*	
	10V	3.3	P	F951A335MPAAQ2	0.5	8	5.0	*
4.7		P	F951A475MPAAQ2	0.5	8	4.0	*	
6.8		P	F951A685MPAAQ2	0.7	8	4.0	*	
10		P	F951A106MPAAQ2	1.0	8	3.0	*	
15		P	F951A156MPAAQ2	1.5	10	3.0	*	
22		P	F951A226MPAAQ2	2.2	14	3.0	*	
22		Q	F951A226MQAAQ2	2.2	10	2.0	*	
22		S	F951A226MSAAQ2	2.2	10	1.1	*	
22		A	F951A226MAAAQ2	2.2	6	0.9	*	
33		Q	F951A336MQAAQ2	3.3	18	3.0	±15	
33		S	F951A336MSAAQ2	3.3	10	1.1	*	
33		A	F951A336MAAAQ2	3.3	10	0.8	*	
47		S	F951A476MSAAQ2	4.7	14	1.1	±15	
47		A	F951A476MAAAQ2	4.7	10	0.8	*	
47		T	F951A476MTAAQ2	4.7	12	0.8	*	
47		B	F951A476MBAAQ2	4.7	8	0.4	*	
68		B	F951A686MBAAQ2	6.8	12	0.4	*	
100		B	F951A107MBAAQ2	10.0	14	0.4	*	
16V		1	P	F951C105MPAAQ2	0.5	8	8.0	*
		1.5	P	F951C155MPAAQ2	0.5	8	8.0	*
	2.2	P	F951C225MPAAQ2	0.5	8	6.0	*	
	3.3	P	F951C335MPAAQ2	0.5	8	6.0	*	
	4.7	P	F951C475MPAAQ2	0.8	10	4.0	*	
	10	P	F951C106MPAAQ2	1.6	10	4.0	*	
	10	Q	F951C106MQAAQ2	1.6	8	3.0	*	
	10	S	F951C106MSAAQ2	1.6	8	2.0	*	
	10	A	F951C106MAAAQ2	1.6	6	1.4	*	
	15	S	F951C156MSAAQ2	2.4	8	2.0	*	
	15	A	F951C156MAAAQ2	2.4	8	1.4	*	
	22	Q	F951C226MQAAQ2	3.5	12	3.0	*	
	22	S	F951C226MSAAQ2	3.5	10	2.0	±15	
	22	A	F951C226MAAAQ2	3.5	8	1.4	*	
	22	T	F951C226MTAAQ2	3.5	8	1.4	*	
22	B	F951C226MBAAQ2	3.5	6	0.5	*		
33	B	F951C336MBAAQ2	5.3	8	0.5	*		
47	B	F951C476MBAAQ2	7.5	10	0.6	*		
20V	2.2	P	F951D225MPAAQ2	0.5	6	6.0	*	
	2.2	S	F951D225MSAAQ2	0.5	6	5.0	*	
	3.3	A	F951D335MAAAQ2	0.7	6	2.0	*	
	4.7	S	F951D475MSAAQ2	0.9	8	4.0	*	
	4.7	A	F951D475MAAAQ2	0.9	6	1.5	*	
	6.8	Q	F951D685MQAAQ2	1.4	10	4.0	*	
	6.8	A	F951D685MAAAQ2	1.4	8	1.5	*	
	10	A	F951D106MAAAQ2	2.0	8	1.5	*	
	10	B	F951D106MBAAQ2	2.0	6	0.8	*	
	22	B	F951D226MBAAQ2	4.4	8	0.8	*	
25V	1	P	F951E105MPAAQ2	0.5	6	8.0	*	
	1	S	F951E105MSAAQ2	0.5	6	8.0	*	
	1.5	S	F951E155MSAAQ2	0.5	6	7.0	*	
	2.2	S	F951E225MSAAQ2	0.6	6	7.0	*	
	2.2	A	F951E225MAAAQ2	0.6	6	3.2	*	
	3.3	A	F951E335MAAAQ2	0.8	6	2.8	*	
	4.7	S	F951E475MSAAQ2	1.2	8	4.0	*	
	4.7	A	F951E475MAAAQ2	1.2	8	2.0	*	
	10	B	F951E106MBAAQ2	2.5	6	0.9	*	
	35V	1	P	F951V105MPAAQ2	0.5	8	10.0	±10
1		S	F951V105MSAAQ2	0.5	6	8.0	*	
1		A	F951V105MAAAQ2	0.5	4	4.4	*	
1.5		A	F951V155MAAAQ2	0.5	6	4.4	*	
2.2		A	F951V225MAAAQ2	0.8	6	4.4	*	
3.3		B	F951V335MBAAQ2	1.2	6	1.6	*	
4.7		B	F951V475MBAAQ2	1.7	6	1.6	*	

\* In case of capacitance tolerance ±10% type, [K] will be put at 9th digit of type numbering system.

\*1 : ΔC/C

Item	P·Q·S·A·T·B Case (%)
Damp Heat	±10
Temperature cycles	±5
Resistance soldering heat	±5
Surge	±5
Endurance	±10